

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937236

Luminaire Tested: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937236
REPORT IS A COMBINATION OF REPORTS P933503 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5904.5 lumens
Efficiency: N/A
Efficacy: 115.3 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 51.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937236

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K

Luminous Intensity Polar Plot

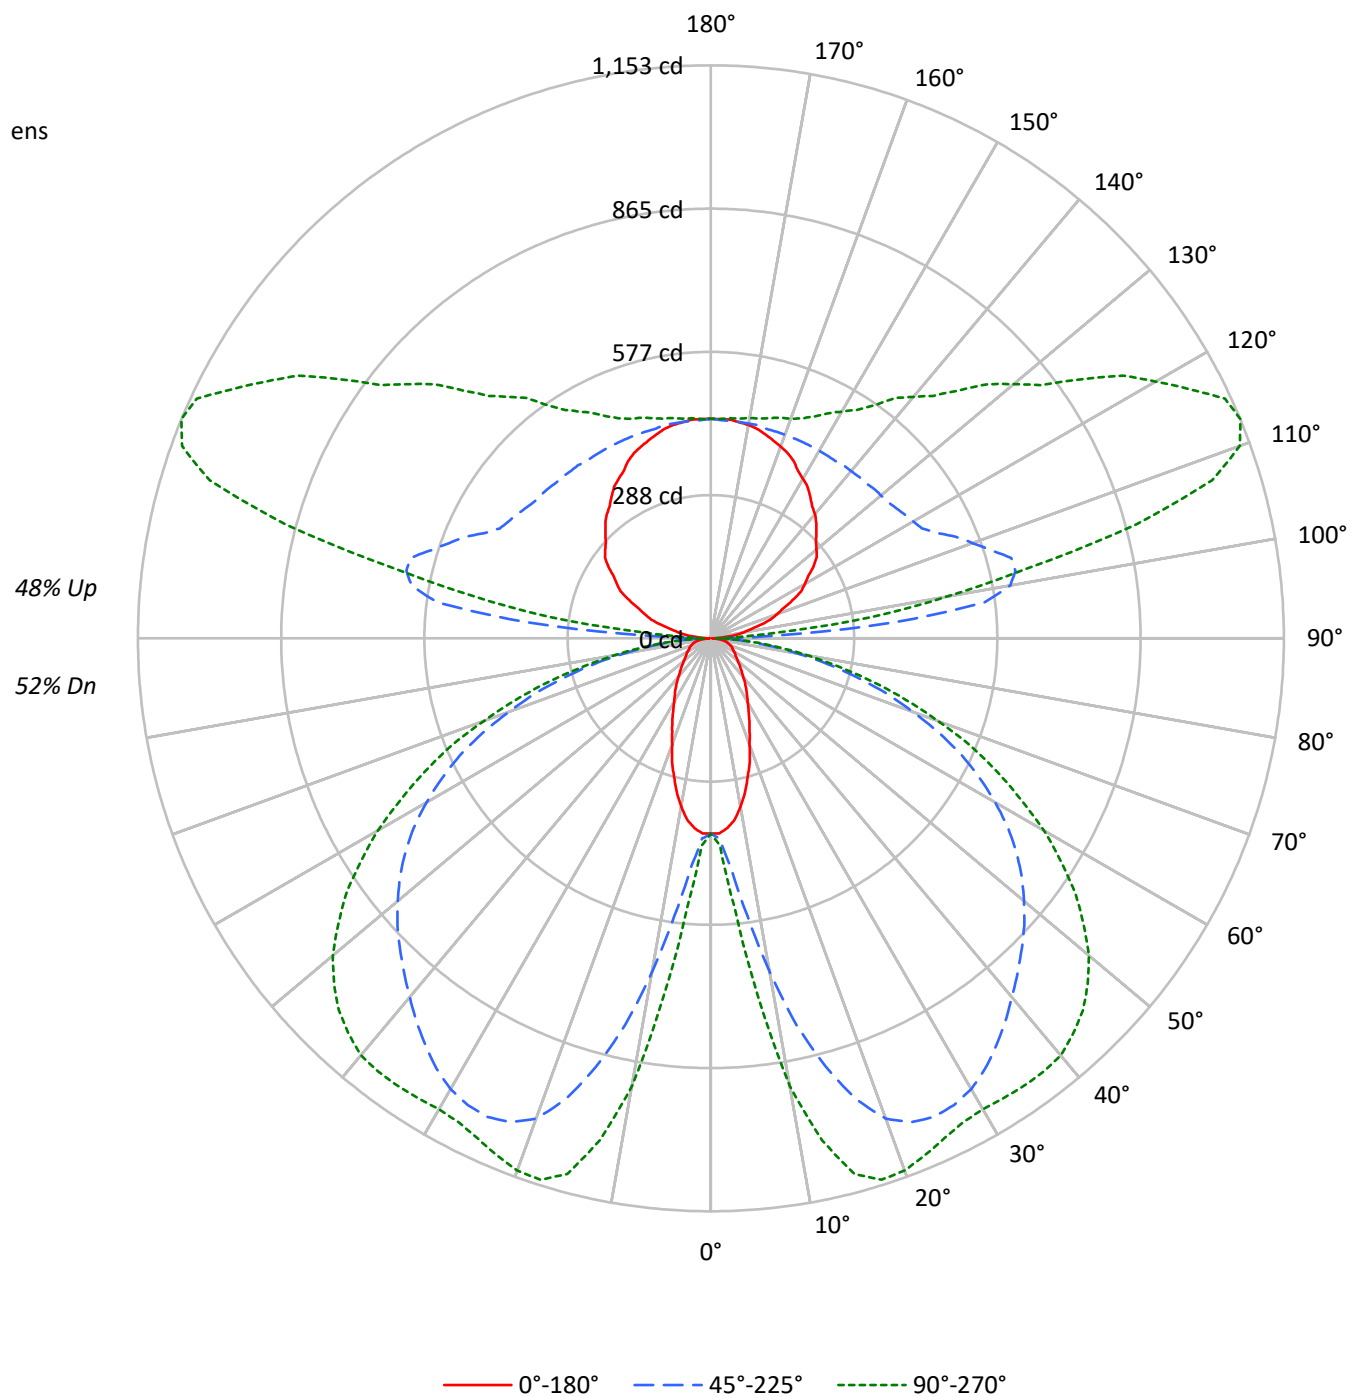

TEST NUMBER: P937236

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	58	58	58
1	98	93	89	85	90	86	82	79	73	70	68	61	59	57	50	49	47	47	47	47
2	88	80	74	69	81	74	69	64	63	59	55	53	50	47	43	41	39	39	39	39
3	80	70	62	56	74	65	58	53	55	50	46	46	42	39	38	35	32	32	32	32
4	73	62	53	47	67	57	50	44	49	43	38	41	36	33	33	30	27	27	27	27
5	67	55	46	40	61	51	43	37	43	37	33	36	32	28	30	26	23	23	23	23
6	61	49	40	34	56	45	38	32	39	33	28	32	28	24	27	23	20	20	20	20
7	56	44	35	30	52	41	33	28	35	29	24	29	25	21	24	20	18	18	18	18
8	52	39	31	26	48	37	29	24	31	26	21	27	22	19	22	18	16	16	16	16
9	49	36	28	23	45	33	26	22	29	23	19	24	20	16	20	17	14	14	14	14
10	45	33	25	20	42	31	24	19	26	21	17	22	18	15	19	15	12	12	12	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3646	3646	3646
5°	3559	4211	4902
10°	3224	6134	8125
15°	2737	8008	9811
20°	2225	9274	9998
25°	1854	9696	9796
30°	1561	9750	9778
35°	1378	9581	10030
40°	1199	9362	10291
45°	1083	9200	10332
50°	992	9052	10161
55°	947	8840	9710
60°	966	8440	8999
65°	1000	7838	8022
70°	1059	6822	6776
75°	1161	5548	5288
80°	1240	3833	3564
85°	1043	2023	1823

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 45°

Luminance: 10332 cd/sqm

TEST NUMBER: P937236

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.8	0.9
10°-20°	225.3	3.8
20°-30°	394.0	6.7
30°-40°	507.2	8.6
40°-50°	566.6	9.6
50°-60°	542.6	9.2
60°-70°	430.1	7.3
70°-80°	252.9	4.3
80°-90°	71.9	1.2
90°-100°	215.3	3.6
100°-110°	566.0	9.6
110°-120°	586.9	9.9
120°-130°	470.8	8.0
130°-140°	369.4	6.3
140°-150°	283.5	4.8
150°-160°	204.2	3.5
160°-170°	124.9	2.1
170°-180°	42.2	0.7
0°-30°	670.1	11.3
0°-40°	1177.4	19.9
0°-60°	2286.6	38.7
0°-90°	3041.4	51.5
90°-120°	1368.2	23.2
90°-150°	2491.8	42.2
90°-180°	2863.0	48.5
0°-180°	5904.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	393	393	393	393	393	
5°	383	411	462	523	542	35
15°	287	529	892	1082	1116	80
25°	183	600	1062	1109	1111	84
35°	124	574	1001	1058	1099	77
45°	85	457	884	1013	1059	65
55°	61	291	750	872	896	55
65°	48	154	557	627	636	48
75°	35	95	306	336	337	37
85°	13	29	76	83	85	13
90°	3	8	23	11	11	3
95°	28	112	371	191	130	32
105°	102	154	626	950	886	108
115°	181	220	501	1000	1141	179
125°	252	282	456	770	909	224
135°	300	330	442	622	705	232
145°	348	370	436	531	572	218
155°	394	405	436	479	493	181
165°	425	430	436	453	459	120
175°	442	442	439	445	445	42
180°	442	442	442	442	442	

TEST NUMBER: P937236

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	392.9	392.9	392.9	392.9	392.9	392.9	392.9	392.9	392.9	392.9	392.9
2.5°	392.9	392.9	395.5	396.7	399.2	400.5	403.0	405.5	413.2	414.4	416.9
5°	382.9	387.9	404.3	410.6	428.3	452.3	462.4	478.9	513.0	523.0	529.3
7.5°	367.7	379.0	419.5	429.6	473.8	537.0	563.5	598.9	653.2	679.8	701.2
10°	343.7	367.7	439.7	463.7	535.7	631.8	681.0	730.2	812.4	849.0	863.0
12.5°	317.2	356.3	461.2	494.0	597.6	737.9	797.3	851.6	945.1	994.3	1001.9
15°	286.8	339.8	481.3	529.3	663.3	826.3	892.0	959.0	1046.2	1081.5	1090.3
17.5°	260.3	327.2	500.3	550.9	713.9	905.9	972.8	1028.5	1099.2	1123.2	1129.6
20°	227.4	307.0	513.0	578.7	767.0	964.0	1028.5	1071.4	1119.4	1134.6	1137.1
22.5°	203.4	285.5	520.6	588.7	802.2	999.4	1053.7	1087.9	1120.7	1125.7	1127.0
25°	183.2	261.5	519.3	600.1	832.7	1020.8	1062.5	1087.9	1106.8	1109.3	1109.3
27.5°	164.3	235.0	514.2	602.7	855.3	1025.9	1058.8	1076.5	1085.3	1090.3	1090.3
30°	147.8	209.7	501.6	597.6	865.5	1020.8	1047.4	1056.2	1065.1	1072.7	1076.5
32.5°	135.2	185.7	482.7	587.5	866.7	1008.2	1027.1	1032.2	1044.8	1062.5	1068.9
35°	123.8	161.7	461.2	573.6	859.1	988.0	1000.7	1005.7	1031.0	1057.5	1066.3
37.5°	112.4	144.0	433.3	549.6	847.8	964.0	972.8	981.7	1020.8	1052.5	1062.5
40°	101.1	128.9	400.5	523.0	830.1	935.0	942.5	956.5	1008.2	1044.8	1055.0
42.5°	92.3	116.3	365.2	495.3	807.3	902.1	913.5	933.7	993.1	1032.2	1043.6
45°	84.6	103.6	327.2	457.3	778.2	868.0	884.4	912.2	975.4	1013.3	1023.4
47.5°	77.1	94.8	288.1	418.2	746.7	833.9	855.3	887.0	951.4	988.0	996.8
50°	70.8	86.0	248.9	376.5	712.6	797.3	822.5	855.3	921.1	955.1	966.5
52.5°	65.7	78.3	212.3	334.9	673.4	759.3	788.4	822.5	884.4	917.3	924.8
55°	60.6	72.0	180.7	290.6	633.0	718.9	750.5	783.3	844.0	871.8	876.8
57.5°	58.1	66.9	154.1	248.9	590.1	673.4	708.8	739.1	795.9	817.4	822.5
60°	54.3	63.2	134.0	213.5	543.3	630.4	660.8	691.1	739.1	756.8	760.6
62.5°	50.6	60.6	118.8	179.4	495.3	579.9	610.2	638.1	678.5	691.1	696.2
65°	48.0	58.1	107.4	154.1	446.0	526.9	557.2	581.2	614.1	626.7	629.2
67.5°	45.5	55.6	98.6	132.6	396.7	473.8	496.6	519.3	544.6	557.2	558.4
70°	41.7	53.1	90.9	117.5	346.1	413.2	432.1	456.1	476.3	482.7	486.4
72.5°	39.2	49.2	86.0	106.1	294.4	355.0	372.7	386.6	404.3	410.6	410.6
75°	35.4	44.2	80.9	94.8	241.3	290.6	305.8	319.7	333.5	336.1	332.3
77.5°	31.6	39.2	69.5	79.6	188.3	230.0	242.6	250.1	261.5	264.1	265.3
80°	26.5	34.1	54.3	61.9	136.4	169.3	178.1	184.4	194.6	194.6	197.1
82.5°	20.2	26.5	39.2	44.2	92.3	116.3	123.8	127.7	134.0	134.0	134.0
85°	12.6	16.4	25.2	29.1	55.6	70.8	75.8	77.1	82.1	83.4	83.4
87.5°	6.3	8.8	16.4	17.7	29.1	36.6	36.6	39.2	39.2	37.9	36.6
90°	3.0	5.4	7.7	8.3	13.1	19.4	22.6	20.1	15.0	11.3	11.3
92.5°	11.9	32.0	52.1	57.2	80.4	111.4	126.9	111.2	79.8	56.3	54.1
95°	28.5	65.4	102.3	111.5	197.9	313.2	370.8	330.8	251.0	191.1	184.4
97.5°	49.2	81.8	114.3	122.4	266.6	458.8	554.9	529.6	479.2	441.4	428.5
100°	65.2	94.7	124.2	131.6	291.5	504.9	611.5	613.3	617.0	619.8	604.4
102.5°	78.9	106.4	133.9	140.8	303.0	519.4	627.5	659.7	723.9	772.1	758.9
105°	101.9	125.3	148.6	154.4	311.5	521.0	625.7	697.8	841.9	950.0	942.9
107.5°	125.6	147.4	169.2	174.6	313.2	497.8	590.2	690.7	891.6	1042.4	1044.2
110°	141.7	161.3	181.0	185.9	310.8	477.2	560.5	672.9	897.6	1066.2	1073.5

TEST NUMBER: P937236

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	157.4	176.1	194.8	199.5	310.9	459.4	533.6	648.6	878.6	1051.0	1062.4
115°	181.1	198.3	215.6	219.9	313.7	438.7	501.2	612.1	833.6	999.8	1015.5
117.5°	204.5	220.2	235.9	239.8	319.6	425.8	479.0	579.0	778.9	928.9	946.3
120°	218.2	232.9	247.7	251.4	324.2	421.5	470.1	561.5	744.2	881.2	898.2
122.5°	231.5	246.4	261.2	265.0	331.0	419.2	463.3	545.5	710.1	833.5	850.2
125°	252.0	265.5	279.1	282.5	340.3	417.4	455.9	525.8	665.6	770.4	785.8
127.5°	268.6	282.3	295.9	299.4	349.5	416.3	449.7	509.7	629.7	719.7	732.7
130°	277.5	292.2	306.9	310.7	356.2	416.9	447.3	500.8	607.6	687.7	699.6
132.5°	286.7	301.4	316.1	319.8	361.6	417.4	445.2	493.0	588.7	660.4	671.2
135°	300.2	313.6	327.1	330.5	367.6	417.0	441.7	481.7	561.9	621.9	631.2
137.5°	314.2	327.5	340.8	344.1	376.5	419.6	441.1	474.9	542.6	593.4	601.0
140°	325.8	338.0	350.3	353.3	381.9	420.0	439.0	468.2	526.7	570.6	577.6
142.5°	334.7	346.0	357.2	360.1	386.4	421.5	439.0	464.7	516.1	554.6	560.7
145°	348.2	358.2	368.0	370.5	392.3	421.5	436.0	457.1	499.0	530.6	535.2
147.5°	361.9	371.5	381.1	383.5	401.0	424.4	436.0	452.6	485.7	510.4	514.2
150°	370.8	379.5	388.2	390.4	405.6	425.9	436.0	450.0	477.9	498.8	501.9
152.5°	380.0	386.6	393.2	394.8	408.6	426.8	436.0	448.0	471.8	489.7	492.0
155°	393.7	398.5	403.3	404.6	415.1	429.0	436.0	445.5	464.4	478.7	480.2
157.5°	403.7	408.5	413.3	414.4	421.6	431.2	436.0	443.4	458.1	469.2	470.3
160°	410.5	414.2	417.9	418.8	424.5	432.2	436.0	442.3	455.1	464.5	465.1
162.5°	417.4	420.2	422.9	423.6	427.7	433.3	436.0	441.4	452.0	460.0	460.6
165°	424.7	427.2	429.7	430.4	432.3	434.8	436.0	439.8	447.5	453.2	453.9
167.5°	431.5	432.7	433.9	434.2	435.8	437.9	439.0	441.5	446.5	450.3	450.6
170°	436.0	437.2	438.4	438.7	438.8	438.9	439.0	441.5	446.5	450.3	450.3
172.5°	438.4	438.7	438.9	439.0	439.0	439.0	439.0	441.0	444.9	447.9	447.7
175°	441.7	441.7	441.7	441.7	440.8	439.6	439.0	440.2	442.7	444.6	444.6
177.5°	441.7	441.7	441.7	441.7	441.0	440.0	439.6	440.5	442.5	444.1	443.8
180°	441.7	441.7	441.7	441.7	441.7	441.7	441.7	441.7	441.7	441.7	441.7

TEST NUMBER: P937236

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	392.9	392.9
2.5°	419.5	416.9
5°	539.5	542.1
7.5°	726.5	725.2
10°	903.4	914.7
12.5°	1032.2	1034.8
15°	1110.6	1115.6
17.5°	1140.9	1142.2
20°	1142.2	1139.6
22.5°	1128.3	1125.7
25°	1111.9	1110.6
27.5°	1096.7	1097.9
30°	1090.3	1094.2
32.5°	1090.3	1096.7
35°	1092.9	1099.2
37.5°	1091.6	1099.2
40°	1086.6	1095.4
42.5°	1072.7	1079.0
45°	1051.2	1058.8
47.5°	1023.4	1028.5
50°	988.0	993.1
52.5°	943.8	945.1
55°	890.7	895.8
57.5°	833.9	835.1
60°	770.7	774.5
62.5°	703.8	703.8
65°	633.0	635.5
67.5°	559.8	566.1
70°	485.2	486.4
72.5°	411.9	411.9
75°	336.1	337.3
77.5°	264.1	264.1
80°	195.8	197.1
82.5°	135.2	137.7
85°	84.6	84.6
87.5°	39.2	35.4
90°	11.3	11.3
92.5°	45.1	36.1
95°	157.3	130.1
97.5°	376.8	325.2
100°	542.9	481.3
102.5°	706.2	653.6
105°	914.6	886.3
107.5°	1051.0	1057.9
110°	1103.1	1132.6

TEST NUMBER: P937236

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1107.7	1153.1
115°	1078.4	1141.2
117.5°	1016.1	1085.8
120°	965.9	1033.5
122.5°	917.0	983.8
125°	847.3	908.8
127.5°	784.6	836.5
130°	747.6	795.6
132.5°	714.1	757.0
135°	668.2	705.2
137.5°	631.3	661.6
140°	606.0	634.3
142.5°	585.0	609.4
145°	553.6	572.1
147.5°	529.5	544.8
150°	514.3	526.8
152.5°	501.3	510.7
155°	486.4	492.6
157.5°	474.7	479.0
160°	467.6	470.1
162.5°	463.0	465.4
165°	456.4	458.9
167.5°	451.6	452.7
170°	450.3	450.3
172.5°	446.7	445.8
175°	444.6	444.6
177.5°	442.7	441.7
180°	441.7	441.7

TEST NUMBER: P937236

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-4-6500K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.62	6.54	6.56	7.49	8.74	18.76	19.68	19.70	20.64	21.88
	3H	6.33	7.15	7.28	8.12	9.39	20.59	21.41	21.54	22.38	23.65
	4H	6.63	7.41	7.59	8.38	9.66	21.23	22.01	22.19	22.98	24.26
	6H	6.89	7.61	7.86	8.58	9.87	21.65	22.37	22.62	23.35	24.64
	8H	6.96	7.64	7.94	8.64	9.93	21.76	22.45	22.74	23.45	24.73
	12H	6.98	7.63	7.96	8.62	9.93	21.83	22.48	22.81	23.47	24.78
4H	2H	12.82	13.60	13.79	14.57	15.85	19.04	19.82	20.01	20.80	22.07
	3H	14.39	15.05	15.37	16.05	17.34	21.08	21.73	22.06	22.73	24.03
	4H	14.49	15.09	15.48	16.08	17.40	21.84	22.44	22.83	23.43	24.75
	6H	14.51	15.02	15.51	16.04	17.35	22.37	22.89	23.37	23.90	25.22
	8H	14.49	14.97	15.49	15.98	17.31	22.53	23.01	23.53	24.02	25.35
	12H	14.44	14.88	15.46	15.91	17.24	22.61	23.05	23.63	24.08	25.41
8H	4H	15.93	16.41	16.93	17.43	18.75	21.90	22.39	22.91	23.40	24.73
	6H	16.18	16.58	17.20	17.63	18.96	22.52	22.92	23.55	23.98	25.30
	8H	16.20	16.55	17.23	17.59	18.93	22.74	23.09	23.77	24.13	25.47
	12H	16.17	16.48	17.21	17.51	18.90	22.88	23.19	23.91	24.22	25.61
12H	4H	16.07	16.51	17.09	17.54	18.87	21.86	22.30	22.88	23.32	24.66
	6H	16.43	16.79	17.47	17.83	19.17	22.51	22.86	23.54	23.90	25.25
	8H	16.50	16.82	17.54	17.85	19.24	22.73	23.04	23.77	24.08	25.47