

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938294

Luminaire Tested: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P938294
REPORT IS A COMBINATION OF REPORTS P933645 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14809.3 lumens
Efficiency: N/A
Efficacy: 133.2 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 111.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P938294
CATALOG NUMBER: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K

Luminous Intensity Polar Plot

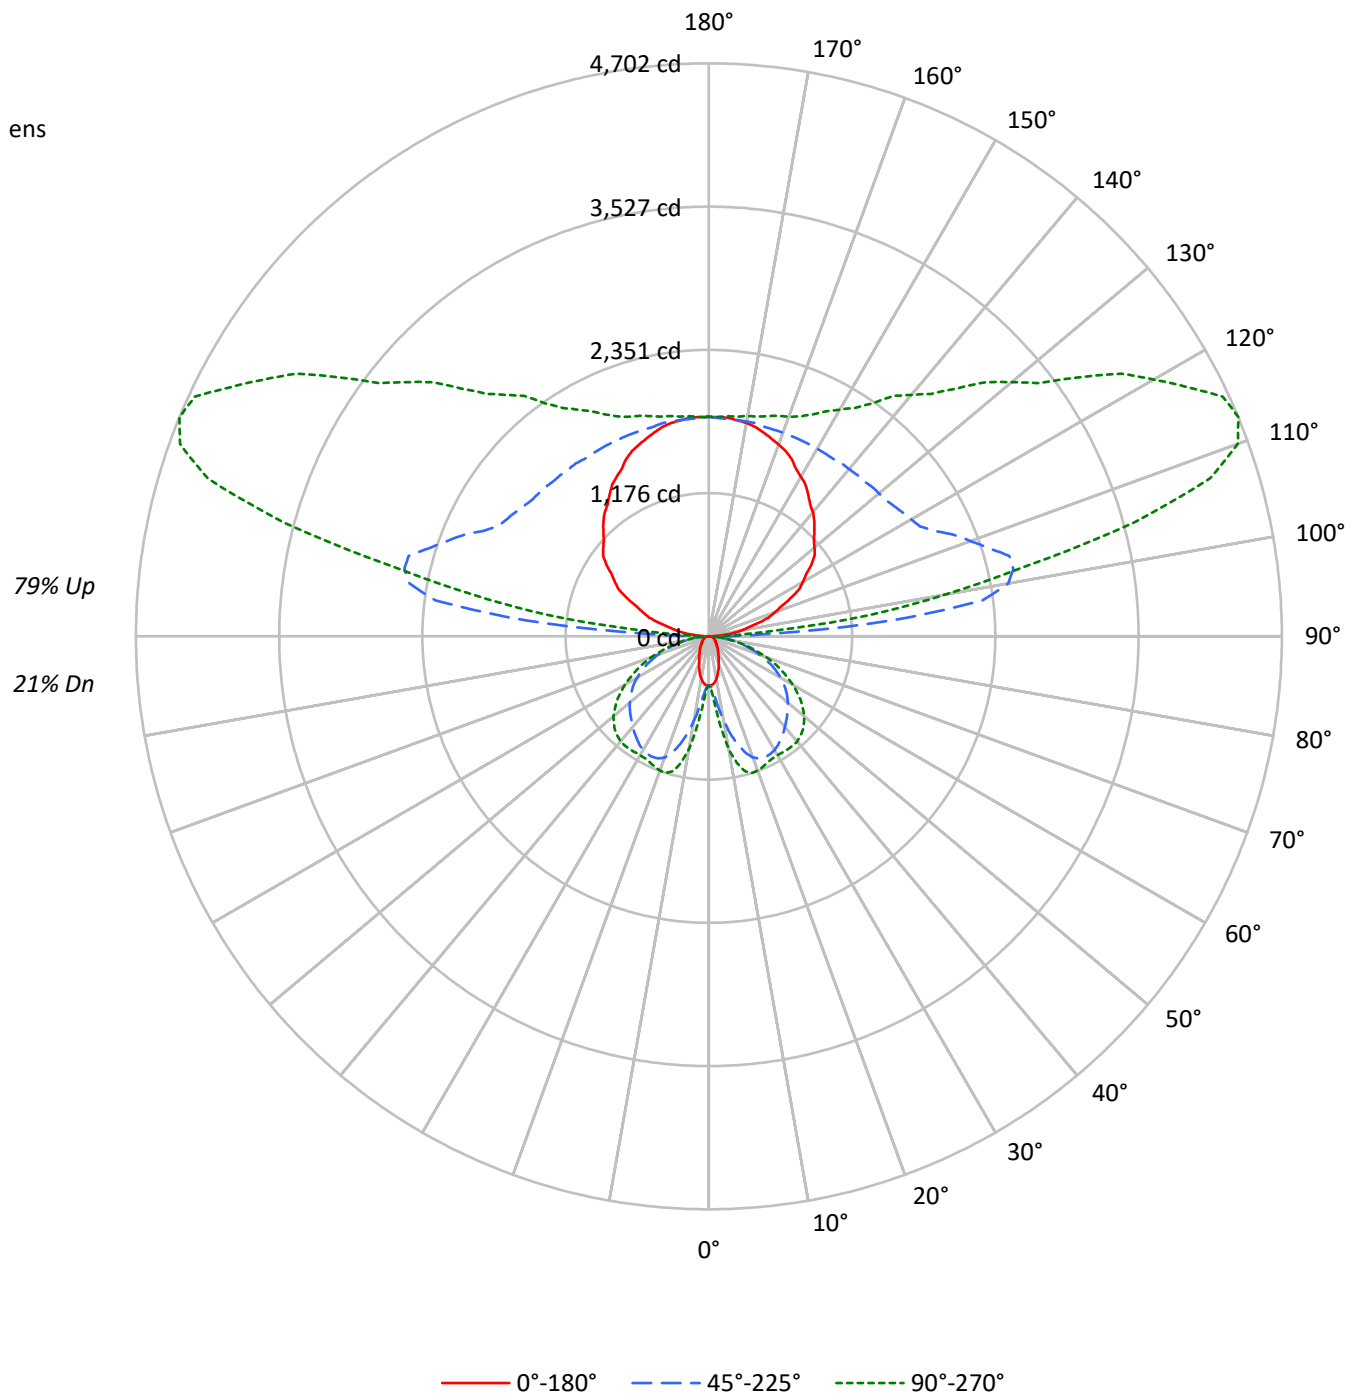



TEST NUMBER: P938294

CATALOG NUMBER: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	89	89	89	89	67	67	67	48	48	48	30	30	30	21
1	91	87	83	80	80	77	74	71	58	56	54	41	40	39	26	25	24	17
2	83	75	70	65	73	67	62	58	51	48	45	36	34	32	22	21	20	14
3	75	66	59	53	66	59	53	48	45	40	37	32	29	27	20	18	17	12
4	69	58	50	45	60	52	45	40	39	35	31	28	25	23	17	16	14	10
5	63	51	44	38	55	46	39	34	35	30	27	25	22	19	15	14	12	8
6	57	46	38	32	51	41	34	29	31	26	23	22	19	17	14	12	11	7
7	53	41	33	28	47	37	30	25	28	23	20	20	17	14	12	11	9	6
8	49	37	30	24	43	33	27	22	25	21	17	18	15	13	11	9	8	5
9	45	34	26	21	40	30	24	19	23	18	15	16	13	11	10	9	7	5
10	42	31	24	19	37	27	21	17	21	17	14	15	12	10	10	8	6	4

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1875	1875	1875
5°	1832	2168	2521
10°	1662	3160	4179
15°	1413	4128	5046
20°	1150	4784	5143
25°	959	5006	5039
30°	808	5037	5029
35°	715	4954	5159
40°	623	4845	5294
45°	564	4765	5314
50°	518	4694	5226
55°	496	4589	4994
60°	508	4388	4628
65°	528	4081	4126
70°	563	3559	3486
75°	623	2902	2720
80°	681	2012	1832
85°	606	1068	938

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 5314 cd/sqm



TEST NUMBER: P938294

CATALOG NUMBER: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.3	0.4
10°-20°	231.7	1.6
20°-30°	405.3	2.7
30°-40°	521.8	3.5
40°-50°	582.8	3.9
50°-60°	558.2	3.8
60°-70°	442.4	3.0
70°-80°	260.1	1.8
80°-90°	79.1	0.5
90°-100°	877.9	5.9
100°-110°	2308.1	15.6
110°-120°	2393.2	16.2
120°-130°	1919.7	13.0
130°-140°	1506.3	10.2
140°-150°	1156.1	7.8
150°-160°	832.6	5.6
160°-170°	509.4	3.4
170°-180°	172.1	1.2
0°-30°	689.4	4.7
0°-40°	1211.2	8.2
0°-60°	2352.2	15.9
0°-90°	3133.9	21.2
90°-120°	5579.2	37.7
90°-150°	10161.3	68.6
90°-180°	11675.0	78.8
0°-180°	14809.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	404	404	404	404	404	
5°	394	422	476	538	558	36
15°	295	545	918	1112	1148	82
25°	188	617	1093	1141	1142	87
35°	127	590	1029	1088	1131	80
45°	87	470	910	1042	1089	67
55°	62	299	772	897	922	57
65°	49	158	573	645	654	49
75°	36	98	314	346	347	38
85°	13	30	78	86	87	14
90°	12	34	92	46	46	11
95°	116	454	1512	780	531	129
105°	416	630	2552	3874	3614	441
115°	739	897	2044	4077	4654	729
125°	1027	1152	1859	3142	3706	912
135°	1224	1348	1801	2536	2876	947
145°	1420	1511	1778	2164	2333	890
155°	1605	1650	1778	1952	2009	738
165°	1732	1755	1778	1848	1871	489
175°	1801	1801	1790	1813	1813	171
180°	1801	1801	1801	1801	1801	



TEST NUMBER: P938294

CATALOG NUMBER: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	404.2	404.2	404.2	404.2	404.2	404.2	404.2	404.2	404.2	404.2	404.2
2.5°	404.2	404.2	406.8	408.1	410.7	412.0	414.6	417.3	425.0	426.3	428.9
5°	393.8	399.0	415.9	422.4	440.6	465.3	475.7	492.5	527.7	538.1	544.6
7.5°	378.2	389.9	431.5	441.9	487.4	552.3	579.7	616.1	671.9	699.2	721.3
10°	353.5	378.2	452.3	477.0	551.1	649.8	700.6	751.3	835.7	873.4	887.7
12.5°	326.3	366.5	474.4	508.1	614.7	759.0	820.2	876.0	972.2	1022.9	1030.6
15°	295.1	349.6	495.2	544.6	682.4	850.0	917.6	986.4	1076.2	1112.5	1121.6
17.5°	267.7	336.6	514.7	566.7	734.3	931.9	1000.8	1058.0	1130.7	1155.4	1161.9
20°	233.9	315.8	527.7	595.3	789.0	991.7	1058.0	1102.1	1151.6	1167.2	1169.8
22.5°	209.2	293.7	535.5	605.6	825.3	1028.1	1083.9	1119.1	1152.8	1158.1	1159.3
25°	188.5	269.0	534.2	617.3	856.5	1050.2	1093.0	1119.1	1138.6	1141.2	1141.2
27.5°	169.0	241.8	529.0	620.0	879.9	1055.3	1089.2	1107.4	1116.5	1121.6	1121.6
30°	152.0	215.8	516.0	614.7	890.3	1050.2	1077.4	1086.5	1095.6	1103.5	1107.4
32.5°	139.1	191.1	496.5	604.4	891.6	1037.1	1056.7	1061.8	1074.8	1093.0	1099.5
35°	127.3	166.4	474.4	590.0	883.8	1016.4	1029.4	1034.6	1060.6	1087.9	1096.9
37.5°	115.7	148.2	445.8	565.4	872.1	991.7	1000.8	1009.9	1050.2	1082.7	1093.0
40°	104.0	132.6	412.0	538.1	853.9	961.8	969.6	983.9	1037.1	1074.8	1085.3
42.5°	94.9	119.6	375.6	509.5	830.5	928.0	939.7	960.5	1021.6	1061.8	1073.6
45°	87.1	106.6	336.6	470.4	800.6	892.9	909.8	938.4	1003.4	1042.4	1052.7
47.5°	79.3	97.5	296.3	430.2	768.1	857.9	879.9	912.4	978.7	1016.4	1025.5
50°	72.8	88.4	256.0	387.3	733.0	820.2	846.1	879.9	947.5	982.6	994.3
52.5°	67.5	80.6	218.3	344.4	692.7	781.1	811.1	846.1	909.8	943.6	951.4
55°	62.4	74.1	185.9	298.9	651.2	739.5	772.0	805.8	868.2	896.8	902.0
57.5°	59.8	68.9	158.5	256.0	607.0	692.7	729.2	760.4	818.8	840.9	846.1
60°	55.9	65.0	137.8	219.7	558.9	648.6	679.8	711.0	760.4	778.5	782.5
62.5°	52.0	62.4	122.2	184.6	509.5	596.6	627.7	656.4	698.0	711.0	716.2
65°	49.4	59.8	110.5	158.5	458.8	542.0	573.2	597.9	631.7	644.7	647.3
67.5°	46.8	57.2	101.4	136.4	408.1	487.4	510.8	534.2	560.2	573.2	574.4
70°	42.9	54.6	93.6	120.8	356.1	425.0	444.5	469.2	490.0	496.5	500.4
72.5°	40.3	50.7	88.4	109.2	302.8	365.2	383.4	397.7	415.9	422.4	422.4
75°	36.4	45.4	83.1	97.5	248.3	298.9	314.5	328.8	343.1	345.7	341.9
77.5°	32.5	40.3	71.5	81.9	193.7	236.5	249.5	257.4	269.0	271.6	273.0
80°	27.3	35.1	55.9	63.7	140.4	174.1	183.2	189.7	200.2	200.2	202.7
82.5°	20.8	27.3	40.3	45.4	94.9	119.6	127.3	131.3	137.8	137.8	137.8
85°	13.0	16.9	26.0	29.8	57.2	72.8	78.0	79.3	84.5	85.8	85.8
87.5°	6.5	9.1	16.9	18.2	29.8	37.7	37.7	40.3	40.3	39.0	37.7
90°	12.1	21.8	31.4	33.8	53.2	79.0	91.9	81.7	61.2	45.9	45.9
92.5°	48.4	130.5	212.8	233.3	328.0	454.3	517.3	453.4	325.6	229.7	220.5
95°	116.1	266.5	416.9	454.5	807.0	1277.0	1512.1	1349.3	1023.8	779.7	751.9
97.5°	200.7	333.3	466.1	499.2	1087.1	1870.9	2262.8	2159.9	1954.2	1799.8	1747.2
100°	265.9	386.2	506.6	536.7	1189.1	2058.7	2493.6	2501.2	2516.2	2527.4	2464.7
102.5°	321.5	433.8	546.0	574.1	1235.8	2117.8	2558.9	2690.0	2952.2	3148.8	3095.1
105°	415.8	510.9	606.0	629.8	1270.4	2124.5	2551.7	2845.6	3433.3	3874.1	3845.2
107.5°	512.5	601.2	689.7	711.9	1276.9	2030.1	2406.6	2816.5	3636.4	4251.2	4258.2
110°	577.8	657.9	737.9	757.9	1267.2	1946.2	2285.8	2744.0	3660.5	4347.9	4377.9



TEST NUMBER: P938294

CATALOG NUMBER: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	641.9	718.1	794.4	813.5	1267.5	1873.0	2175.7	2644.7	3582.7	4286.2	4332.4
115°	738.6	808.9	879.3	896.9	1279.3	1789.1	2044.0	2495.8	3399.3	4077.1	4141.1
117.5°	834.0	898.0	961.9	977.9	1303.0	1736.5	1953.3	2361.1	3176.6	3788.2	3859.2
120°	889.6	949.8	1010.0	1025.0	1322.4	1718.8	1917.1	2289.7	3034.8	3593.6	3662.6
122.5°	944.0	1004.8	1065.4	1080.6	1350.2	1709.6	1889.3	2224.7	2895.8	3399.0	3467.1
125°	1027.4	1082.8	1138.1	1151.9	1387.6	1701.9	1859.0	2144.0	2714.0	3141.5	3204.2
127.5°	1095.2	1151.0	1206.9	1220.8	1425.1	1697.5	1833.6	2078.3	2567.8	2934.8	2987.7
130°	1131.4	1191.6	1251.8	1266.8	1452.5	1700.1	1823.9	2041.8	2477.5	2804.3	2853.2
132.5°	1168.9	1229.1	1289.3	1304.3	1474.7	1702.0	1815.5	2010.5	2400.5	2693.0	2736.8
135°	1224.4	1279.3	1334.1	1347.8	1498.8	1700.3	1801.0	1964.4	2291.0	2536.0	2573.7
137.5°	1281.3	1335.6	1389.7	1403.3	1535.1	1710.8	1798.7	1936.7	2212.8	2419.9	2450.8
140°	1328.4	1378.4	1428.3	1440.8	1557.3	1712.5	1790.1	1909.4	2148.0	2326.9	2355.7
142.5°	1364.6	1410.9	1457.1	1468.6	1575.8	1718.7	1790.1	1894.9	2104.4	2261.5	2286.4
145°	1420.3	1460.6	1500.9	1511.0	1600.0	1718.7	1778.0	1863.7	2035.1	2163.7	2182.5
147.5°	1475.9	1515.1	1554.4	1564.2	1635.5	1730.5	1778.0	1845.5	1980.2	2081.4	2097.0
150°	1512.1	1547.6	1583.1	1591.9	1653.9	1736.6	1778.0	1835.0	1948.9	2034.3	2046.9
152.5°	1549.6	1576.5	1603.4	1610.1	1666.1	1740.7	1778.0	1826.7	1923.9	1996.8	2006.3
155°	1605.2	1625.1	1645.0	1649.9	1692.6	1749.5	1778.0	1816.7	1894.1	1952.1	1958.4
157.5°	1646.3	1665.7	1685.0	1689.8	1719.2	1758.4	1778.0	1808.2	1868.3	1913.5	1917.9
160°	1674.1	1689.2	1704.2	1708.0	1731.3	1762.4	1778.0	1803.8	1855.4	1894.1	1896.6
162.5°	1702.0	1713.2	1724.5	1727.3	1744.2	1766.8	1778.0	1799.8	1843.3	1876.0	1878.4
165°	1732.1	1742.3	1752.5	1755.1	1762.7	1772.9	1778.0	1793.6	1824.8	1848.2	1850.7
167.5°	1759.9	1764.7	1769.6	1770.8	1777.2	1785.9	1790.1	1800.3	1820.8	1836.1	1837.1
170°	1778.0	1782.9	1787.7	1789.0	1789.4	1789.8	1790.1	1800.3	1820.8	1836.1	1836.1
172.5°	1787.7	1788.8	1789.8	1790.1	1790.1	1790.1	1790.1	1798.2	1814.3	1826.4	1825.4
175°	1801.0	1801.0	1801.0	1801.0	1797.4	1792.6	1790.1	1795.3	1805.4	1813.1	1813.1
177.5°	1801.0	1801.0	1801.0	1801.0	1798.2	1794.4	1792.6	1796.6	1804.7	1810.7	1809.6
180°	1801.0	1801.0	1801.0	1801.0	1801.0	1801.0	1801.0	1801.0	1801.0	1801.0	1801.0



TEST NUMBER: P938294

CATALOG NUMBER: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	404.2	404.2
2.5°	431.5	428.9
5°	554.9	557.6
7.5°	747.3	746.0
10°	929.3	941.0
12.5°	1061.8	1064.4
15°	1142.5	1147.7
17.5°	1173.7	1174.9
20°	1174.9	1172.3
22.5°	1160.7	1158.1
25°	1143.7	1142.5
27.5°	1128.1	1129.5
30°	1121.6	1125.6
32.5°	1121.6	1128.1
35°	1124.2	1130.7
37.5°	1123.0	1130.7
40°	1117.7	1126.9
42.5°	1103.5	1110.0
45°	1081.4	1089.2
47.5°	1052.7	1058.0
50°	1016.4	1021.6
52.5°	970.8	972.2
55°	916.3	921.5
57.5°	857.9	859.1
60°	792.8	796.7
62.5°	723.9	723.9
65°	651.2	653.8
67.5°	575.8	582.3
70°	499.1	500.4
72.5°	423.7	423.7
75°	345.7	347.0
77.5°	271.6	271.6
80°	201.5	202.7
82.5°	139.1	141.7
85°	87.1	87.1
87.5°	40.3	36.4
90°	45.9	45.9
92.5°	184.0	147.5
95°	641.3	530.6
97.5°	1536.5	1326.0
100°	2213.9	1963.0
102.5°	2880.2	2665.3
105°	3729.7	3614.2
107.5°	4286.1	4314.0
110°	4498.3	4618.6



TEST NUMBER: P938294
CATALOG NUMBER: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	4517.2	4702.0
115°	4397.4	4653.6
117.5°	4143.4	4427.7
120°	3938.8	4214.9
122.5°	3739.5	4011.9
125°	3455.2	3706.0
127.5°	3199.4	3411.1
130°	3048.8	3244.3
132.5°	2911.9	3087.1
135°	2724.6	2875.6
137.5°	2574.3	2697.9
140°	2471.2	2586.7
142.5°	2385.8	2485.2
145°	2257.7	2332.9
147.5°	2159.3	2221.6
150°	2097.5	2148.0
152.5°	2044.5	2082.7
155°	1983.7	2008.9
157.5°	1935.6	1953.3
160°	1906.9	1917.1
162.5°	1888.0	1897.7
165°	1861.0	1871.1
167.5°	1841.5	1845.8
170°	1836.1	1836.1
172.5°	1821.7	1817.9
175°	1813.1	1813.1
177.5°	1805.2	1801.0
180°	1801.0	1801.0



TEST NUMBER: P938294

CATALOG NUMBER: SQ4-FB-150U-050D-B2750-1D-UNV-STD-W-8-3500K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.28	0.78	1.43	3.06	12.79	13.46	13.96	14.61	16.24
	3H	0.30	0.90	1.48	2.06	3.70	14.62	15.21	15.79	16.38	18.02
	4H	0.59	1.16	1.77	2.32	3.97	15.25	15.82	16.44	16.98	18.63
	6H	0.83	1.35	2.02	2.52	4.18	15.67	16.19	16.86	17.36	19.02
	8H	0.89	1.39	2.09	2.57	4.22	15.79	16.28	16.98	17.46	19.11
	12H	0.90	1.37	2.10	2.55	4.22	15.85	16.32	17.04	17.49	19.17
4H	2H	6.81	7.37	8.00	8.53	10.18	13.04	13.61	14.23	14.77	16.42
	3H	8.35	8.83	9.55	10.01	11.67	15.07	15.54	16.26	16.73	18.39
	4H	8.44	8.88	9.64	10.05	11.73	15.83	16.26	17.02	17.44	19.12
	6H	8.44	8.81	9.64	10.01	11.68	16.36	16.73	17.55	17.93	19.59
	8H	8.41	8.76	9.61	9.95	11.63	16.51	16.86	17.71	18.05	19.73
	12H	8.36	8.67	9.57	9.87	11.56	16.60	16.91	17.81	18.11	19.80
8H	4H	9.87	10.22	11.07	11.40	13.09	15.87	16.22	17.07	17.41	19.09
	6H	10.10	10.39	11.32	11.62	13.30	16.49	16.78	17.71	18.01	19.69
	8H	10.12	10.37	11.34	11.57	13.27	16.71	16.96	17.93	18.17	19.87
	12H	10.07	10.29	11.30	11.50	13.23	16.84	17.06	18.07	18.27	20.00
12H	4H	10.00	10.32	11.22	11.52	13.21	15.81	16.13	17.03	17.33	19.02
	6H	10.36	10.61	11.58	11.81	13.52	16.47	16.72	17.69	17.93	19.63
	8H	10.42	10.64	11.64	11.84	13.57	16.69	16.91	17.92	18.12	19.85