

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P934095

Luminaire Tested: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P934095
REPORT IS A COMBINATION OF REPORTS P933684 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8765.0 lumens
Efficiency: N/A
Efficacy: 113.0 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 77.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P934095
CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

Luminous Intensity Polar Plot

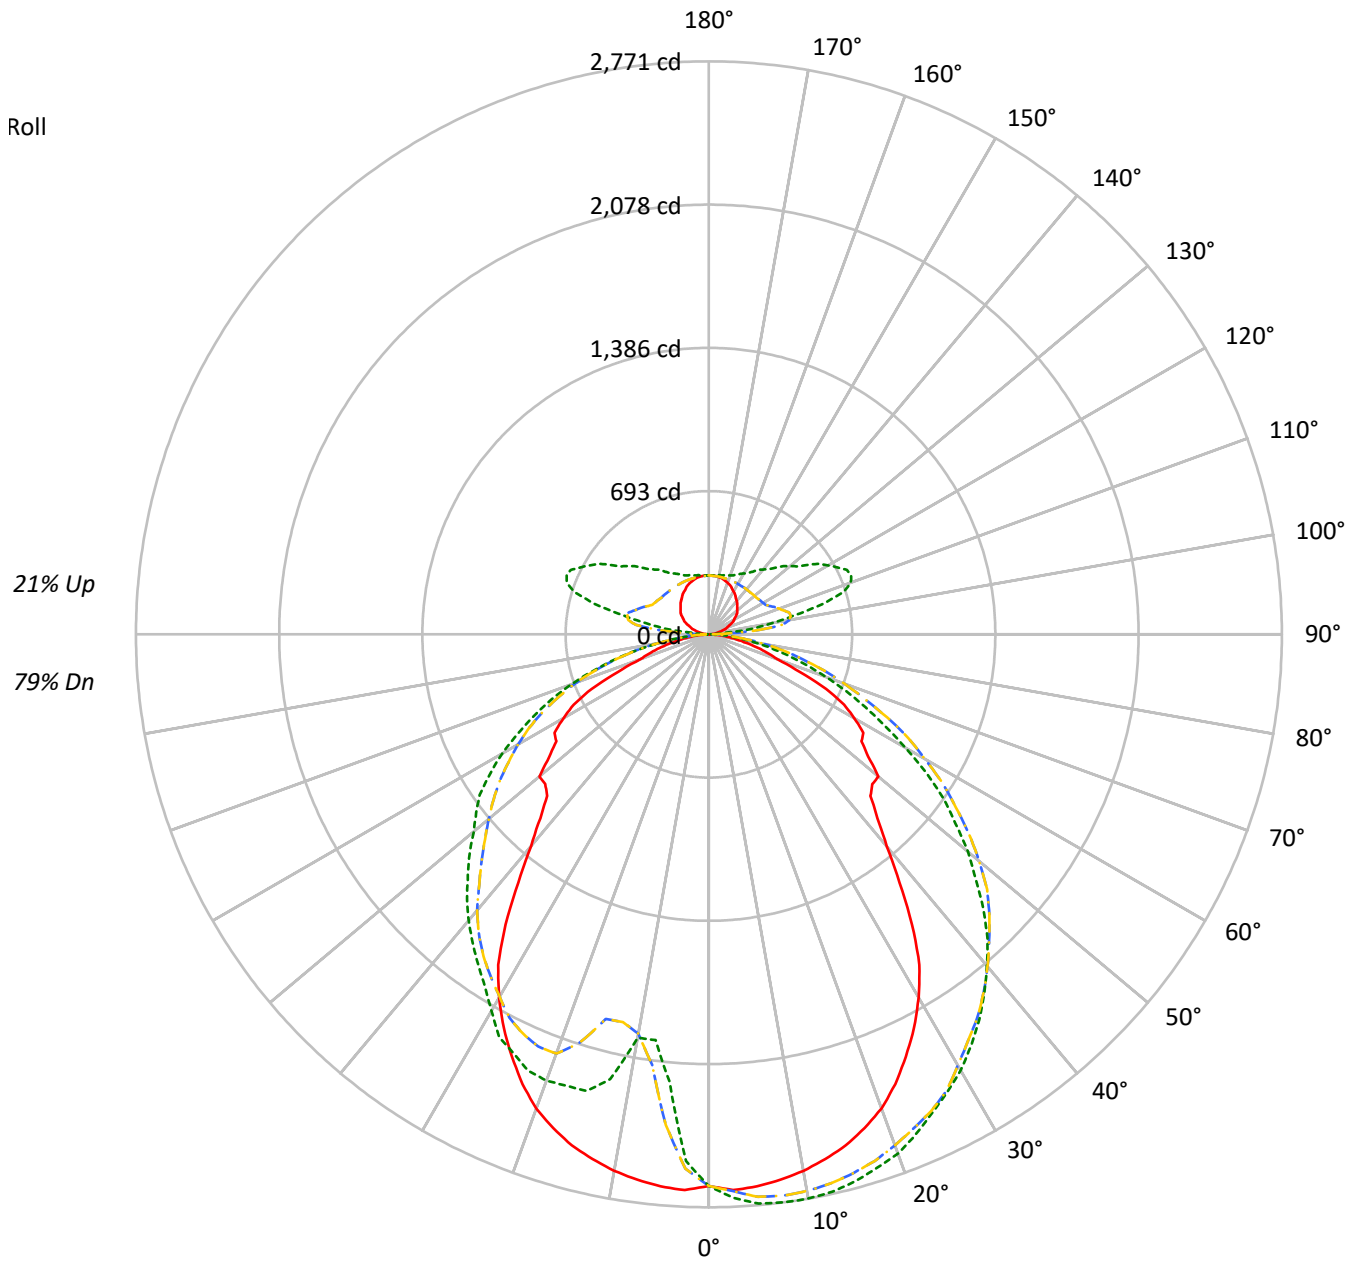

— 0°-180° - - 45°-225° - - - 90°-270° - · - 135°-315°



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	114	114	114	114	109	109	109	109	99	99	99	91	91	91	83	83	83	79			79
1	104	100	96	92	100	96	92	89	88	85	82	80	78	76	73	72	70	67			67
2	95	87	81	76	91	84	78	73	77	72	68	70	67	64	65	62	59	56			56
3	87	77	69	63	83	74	67	61	68	62	57	62	58	54	57	54	50	47			47
4	79	68	60	53	76	65	58	52	60	54	49	56	50	46	51	47	43	41			41
5	73	61	52	46	70	58	51	45	54	47	42	50	44	40	46	41	38	35			35
6	67	55	46	40	64	53	45	39	49	42	37	45	39	35	42	37	33	31			31
7	62	50	41	35	59	48	40	34	44	38	33	41	35	31	38	33	30	27			27
8	58	45	37	31	55	44	36	31	40	34	29	38	32	28	35	30	26	24			24
9	54	41	33	28	52	40	33	27	37	31	26	35	29	25	32	27	24	22			22
10	51	38	30	25	48	37	30	25	34	28	24	32	27	23	30	25	22	20			20

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12376	12376	12376	12376
5°	12468	12493	12468	9823
10°	12385	12306	12385	8798
15°	12250	12039	12250	10053
20°	11994	11724	11994	10074
25°	11469	11263	11469	9860
30°	10792	10880	10792	9392
35°	9621	10397	9621	8877
40°	8017	9827	8017	8488
45°	7163	9160	7163	8040
50°	7610	8365	7610	7591
55°	7160	7509	7160	7331
60°	7381	6378	7381	6715
65°	6691	5272	6691	5893
70°	4634	4202	4634	4939
75°	4063	3106	4063	3719
80°	3273	2053	3273	2236
85°	1882	1087	1882	924

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 10978 cd/sqm



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	240.8	2.7
10°-20°	683.6	7.8
20°-30°	1056.8	12.1
30°-40°	1261.6	14.4
40°-50°	1269.0	14.5
50°-60°	1104.2	12.6
60°-70°	782.9	8.9
70°-80°	414.2	4.7
80°-90°	104.2	1.2
90°-100°	138.9	1.6
100°-110°	365.3	4.2
110°-120°	378.8	4.3
120°-130°	303.8	3.5
130°-140°	238.4	2.7
140°-150°	183.0	2.1
150°-160°	131.8	1.5
160°-170°	80.6	0.9
170°-180°	27.2	0.3
0°-30°	1981.2	22.6
0°-40°	3242.8	37.0
0°-60°	5615.9	64.1
0°-90°	6917.2	78.9
90°-120°	883.0	10.1
90°-150°	1608.2	18.3
90°-180°	1848.0	21.1
0°-180°	8765.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2667	2667	2667	2667	2667	
5°	2680	2763	2680	2173	2680	254
15°	2559	2738	2559	2286	2559	720
25°	2254	2554	2254	2236	2254	1035
35°	1714	2279	1714	1946	1714	1060
45°	1105	1878	1105	1648	1105	885
55°	901	1385	901	1353	901	828
65°	626	835	626	934	626	598
75°	237	396	237	474	237	249
85°	40	101	40	86	40	55
90°	2	7	2	7	2	3
95°	18	84	18	84	18	20
105°	66	572	66	572	66	70
115°	117	736	117	736	117	115
125°	163	587	163	587	163	144
135°	194	455	194	455	194	150
145°	225	369	225	369	225	141
155°	254	318	254	318	254	117
165°	274	296	274	296	274	77
175°	285	287	285	287	285	27
180°	285	285	285	285	285	



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4
2.5°	2690.1	2690.1	2705.2	2710.3	2710.3	2702.7	2695.2	2702.7	2725.5	2733.0	2730.5
5°	2680.0	2700.2	2728.0	2733.0	2738.1	2735.5	2730.5	2735.5	2760.8	2765.9	2768.4
7.5°	2659.9	2697.7	2733.0	2740.6	2748.2	2740.6	2738.1	2743.1	2768.4	2773.4	2773.4
10°	2634.6	2687.6	2728.0	2733.0	2740.6	2733.0	2733.0	2743.1	2768.4	2773.4	2775.9
12.5°	2599.2	2672.5	2710.3	2715.4	2725.5	2722.9	2720.4	2730.5	2755.7	2760.8	2760.8
15°	2558.9	2644.7	2680.0	2685.1	2702.7	2697.7	2697.7	2707.8	2735.5	2743.1	2740.6
17.5°	2503.3	2609.3	2649.7	2657.3	2669.9	2667.4	2669.9	2680.0	2705.2	2710.3	2712.9
20°	2440.3	2561.4	2609.3	2616.9	2629.6	2629.6	2629.6	2642.2	2667.4	2677.5	2677.5
22.5°	2354.5	2511.0	2561.4	2566.5	2581.6	2581.6	2586.6	2604.3	2627.0	2629.6	2629.6
25°	2253.5	2455.4	2498.3	2513.5	2528.6	2536.2	2543.7	2553.9	2561.4	2558.9	2561.4
27.5°	2147.5	2384.7	2440.3	2450.3	2470.6	2478.1	2488.3	2490.7	2493.3	2500.9	2495.8
30°	2028.9	2286.4	2369.6	2379.8	2412.5	2417.6	2407.5	2412.5	2425.1	2430.2	2435.2
32.5°	1895.2	2140.0	2296.5	2319.1	2349.4	2334.3	2331.7	2339.4	2359.5	2359.5	2364.6
35°	1713.5	2026.4	2228.3	2248.5	2271.2	2253.5	2263.6	2266.1	2278.8	2286.4	2283.8
37.5°	1514.2	1928.0	2157.6	2172.8	2190.5	2167.8	2182.8	2190.5	2200.5	2195.5	2195.5
40°	1337.5	1774.1	2074.4	2084.5	2099.6	2081.9	2097.1	2102.1	2107.2	2102.1	2099.6
42.5°	1206.3	1605.0	1986.0	1998.6	1988.6	2001.2	2006.3	2016.3	2008.7	1998.6	1998.6
45°	1105.3	1559.5	1890.1	1905.3	1890.1	1910.4	1917.9	1917.9	1895.2	1890.1	1887.7
47.5°	1072.6	1468.7	1794.3	1794.3	1786.7	1811.9	1824.5	1806.9	1784.1	1776.6	1776.6
50°	1070.0	1367.8	1663.0	1652.9	1688.2	1718.5	1705.9	1688.2	1670.6	1642.8	1642.8
52.5°	971.6	1244.1	1493.9	1531.8	1587.3	1605.0	1584.8	1567.2	1536.9	1524.3	1514.2
55°	900.9	1115.4	1340.1	1415.7	1473.8	1496.5	1458.6	1441.0	1395.5	1388.0	1382.9
57.5°	885.8	928.6	1198.7	1294.6	1365.3	1362.7	1340.1	1307.2	1269.4	1261.7	1259.3
60°	812.6	671.3	1047.3	1160.8	1234.1	1226.4	1206.3	1176.0	1140.7	1135.6	1130.5
62.5°	736.9	487.0	875.6	1004.4	1107.8	1105.3	1087.6	1042.2	1017.0	1004.4	994.3
65°	625.8	408.8	623.3	835.3	984.2	989.2	951.4	918.6	890.8	875.6	873.2
67.5°	476.9	333.1	421.4	696.5	865.6	860.6	812.6	797.4	762.1	754.5	739.4
70°	353.3	222.0	292.7	565.3	749.5	736.9	699.1	681.4	648.5	630.9	620.8
72.5°	292.7	179.2	214.5	439.1	630.9	615.8	582.9	562.8	535.0	519.8	509.8
75°	237.2	189.3	164.1	325.6	512.3	502.2	471.9	451.7	429.0	408.8	411.3
77.5°	174.1	176.7	131.2	239.7	406.3	391.2	373.5	348.3	338.2	318.0	318.0
80°	131.2	138.8	98.5	164.1	292.7	292.7	277.6	260.0	242.3	232.2	232.2
82.5°	88.3	88.3	73.2	103.4	199.4	191.8	181.7	176.7	166.6	161.5	161.5
85°	40.4	50.4	45.5	63.1	108.5	113.5	113.5	108.5	106.0	100.9	103.4
87.5°	12.6	22.7	27.8	35.3	55.5	58.1	60.5	60.5	60.5	63.1	63.1
90°	1.9	3.4	5.0	5.3	8.4	12.5	14.5	12.9	9.6	7.3	7.3
92.5°	7.6	20.6	33.7	37.0	52.0	71.9	81.8	71.7	51.6	36.4	35.0
95°	18.3	42.1	66.0	71.9	127.7	202.1	239.3	213.5	162.1	123.4	119.0
97.5°	31.8	52.8	73.7	79.0	172.0	296.0	358.1	341.9	309.3	284.9	276.6
100°	42.1	61.1	80.1	84.9	188.1	325.8	394.6	395.8	398.2	400.0	390.1
102.5°	50.9	68.7	86.4	90.8	195.6	335.2	405.0	425.7	467.2	498.3	489.8
105°	65.8	80.9	96.0	99.7	201.1	336.3	403.9	450.4	543.4	613.1	608.5
107.5°	81.1	95.1	109.2	112.7	202.1	321.3	380.9	445.7	575.5	672.8	673.9
110°	91.5	104.1	116.8	119.9	200.5	308.0	361.8	434.2	579.3	688.1	692.9



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	101.6	113.6	125.7	128.7	200.6	296.4	344.4	418.6	567.0	678.3	685.7
115°	116.9	128.0	139.1	141.9	202.5	283.2	323.5	395.0	538.0	645.3	655.4
117.5°	132.0	142.1	152.2	154.8	206.3	274.8	309.1	373.7	502.7	599.5	610.8
120°	140.8	150.3	159.9	162.3	209.3	272.1	303.4	362.3	480.3	568.7	579.6
122.5°	149.4	159.0	168.7	171.0	213.7	270.6	299.0	352.1	458.3	538.0	548.7
125°	162.6	171.4	180.1	182.3	219.6	269.4	294.2	339.3	429.6	497.2	507.1
127.5°	173.3	182.1	191.0	193.2	225.6	268.6	290.2	329.0	406.4	464.5	472.9
130°	179.1	188.6	198.1	200.5	229.9	269.1	288.7	323.2	392.1	443.8	451.5
132.5°	185.0	194.5	204.0	206.4	233.4	269.4	287.4	318.2	379.9	426.2	433.2
135°	193.8	202.5	211.2	213.3	237.2	269.1	285.1	310.9	362.6	401.4	407.3
137.5°	202.7	211.3	219.9	222.1	243.0	270.7	284.7	306.6	350.2	383.0	387.8
140°	210.2	218.1	226.0	228.1	246.5	271.0	283.3	302.3	340.0	368.2	372.8
142.5°	216.0	223.3	230.6	232.4	249.4	272.1	283.3	300.0	333.1	357.9	361.8
145°	224.8	231.2	237.5	239.1	253.3	272.1	281.4	295.0	322.1	342.5	345.4
147.5°	233.6	239.8	246.0	247.5	258.8	273.9	281.4	292.1	313.4	329.4	331.9
150°	239.3	245.0	250.5	251.9	261.8	274.8	281.4	290.4	308.5	321.9	323.9
152.5°	245.2	249.4	253.7	254.8	263.7	275.5	281.4	289.1	304.5	316.0	317.5
155°	254.0	257.2	260.3	261.1	267.9	277.0	281.4	287.6	299.8	308.9	309.9
157.5°	260.5	263.6	266.6	267.4	272.1	278.3	281.4	286.2	295.7	302.8	303.5
160°	264.9	267.3	269.7	270.3	274.0	279.0	281.4	285.5	293.7	299.8	300.2
162.5°	269.3	271.1	272.8	273.3	276.0	279.6	281.4	284.9	291.8	296.9	297.3
165°	274.2	275.8	277.4	277.8	279.1	280.7	281.4	283.9	288.8	292.5	292.9
167.5°	278.6	279.3	280.1	280.3	281.3	282.7	283.3	285.0	288.2	290.6	290.8
170°	281.4	282.2	283.0	283.2	283.3	283.3	283.3	285.0	288.2	290.6	290.6
172.5°	283.0	283.2	283.3	283.3	283.3	283.3	283.3	284.6	287.2	289.1	288.9
175°	285.1	285.1	285.1	285.1	284.5	283.7	283.3	284.1	285.7	287.0	287.0
177.5°	285.1	285.1	285.1	285.1	284.6	284.0	283.7	284.4	285.6	286.6	286.4
180°	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4
2.5°	2735.5	2728.0	2735.5	2730.5	2733.0	2725.5	2702.7	2695.2	2702.7	2710.3	2710.3
5°	2768.4	2763.3	2768.4	2768.4	2765.9	2760.8	2735.5	2730.5	2735.5	2738.1	2733.0
7.5°	2778.5	2770.8	2778.5	2773.4	2773.4	2768.4	2743.1	2738.1	2740.6	2748.2	2740.6
10°	2778.5	2770.8	2778.5	2775.9	2773.4	2768.4	2743.1	2733.0	2733.0	2740.6	2733.0
12.5°	2765.9	2760.8	2765.9	2760.8	2760.8	2755.7	2730.5	2720.4	2722.9	2725.5	2715.4
15°	2745.6	2738.1	2745.6	2740.6	2743.1	2735.5	2707.8	2697.7	2697.7	2702.7	2685.1
17.5°	2715.4	2705.2	2715.4	2712.9	2710.3	2705.2	2680.0	2669.9	2667.4	2669.9	2657.3
20°	2680.0	2672.5	2680.0	2677.5	2677.5	2667.4	2642.2	2629.6	2629.6	2629.6	2616.9
22.5°	2624.5	2616.9	2624.5	2629.6	2629.6	2627.0	2604.3	2586.6	2581.6	2581.6	2566.5
25°	2561.4	2553.9	2561.4	2561.4	2558.9	2561.4	2553.9	2543.7	2536.2	2528.6	2513.5
27.5°	2500.9	2495.8	2500.9	2495.8	2500.9	2493.3	2490.7	2488.3	2478.1	2470.6	2450.3
30°	2440.3	2435.2	2440.3	2435.2	2430.2	2425.1	2412.5	2407.5	2417.6	2412.5	2379.8
32.5°	2364.6	2359.5	2364.6	2364.6	2359.5	2359.5	2339.4	2331.7	2334.3	2349.4	2319.1
35°	2286.4	2278.8	2286.4	2283.8	2286.4	2278.8	2266.1	2263.6	2253.5	2271.2	2248.5
37.5°	2195.5	2187.9	2195.5	2195.5	2195.5	2200.5	2190.5	2182.8	2167.8	2190.5	2172.8
40°	2102.1	2092.0	2102.1	2099.6	2102.1	2107.2	2102.1	2097.1	2081.9	2099.6	2084.5
42.5°	1996.1	1993.7	1996.1	1998.6	1998.6	2008.7	2016.3	2006.3	2001.2	1988.6	1998.6
45°	1882.6	1877.5	1882.6	1887.7	1890.1	1895.2	1917.9	1917.9	1910.4	1890.1	1905.3
47.5°	1761.4	1748.8	1761.4	1776.6	1776.6	1784.1	1806.9	1824.5	1811.9	1786.7	1794.3
50°	1632.8	1635.2	1632.8	1642.8	1642.8	1670.6	1688.2	1705.9	1718.5	1688.2	1652.9
52.5°	1506.6	1504.0	1506.6	1514.2	1524.3	1536.9	1567.2	1584.8	1605.0	1587.3	1531.8
55°	1380.4	1385.4	1380.4	1382.9	1388.0	1395.5	1441.0	1458.6	1496.5	1473.8	1415.7
57.5°	1254.2	1246.7	1254.2	1259.3	1261.7	1269.4	1307.2	1340.1	1362.7	1365.3	1294.6
60°	1107.8	1097.8	1107.8	1130.5	1135.6	1140.7	1176.0	1206.3	1226.4	1234.1	1160.8
62.5°	979.2	961.5	979.2	994.3	1004.4	1017.0	1042.2	1087.6	1105.3	1107.8	1004.4
65°	842.9	835.3	842.9	873.2	875.6	890.8	918.6	951.4	989.2	984.2	835.3
67.5°	719.2	719.2	719.2	739.4	754.5	762.1	797.4	812.6	860.6	865.6	696.5
70°	605.7	603.2	605.7	620.8	630.9	648.5	681.4	699.1	736.9	749.5	565.3
72.5°	497.2	494.6	497.2	509.8	519.8	535.0	562.8	582.9	615.8	630.9	439.1
75°	401.3	396.2	401.3	411.3	408.8	429.0	451.7	471.9	502.2	512.3	325.6
77.5°	307.9	307.9	307.9	318.0	318.0	338.2	348.3	373.5	391.2	406.3	239.7
80°	229.7	227.1	229.7	232.2	232.2	242.3	260.0	277.6	292.7	292.7	164.1
82.5°	161.5	156.4	161.5	161.5	161.5	166.6	176.7	181.7	191.8	199.4	103.4
85°	100.9	100.9	100.9	103.4	100.9	106.0	108.5	113.5	113.5	108.5	63.1
87.5°	65.6	63.1	65.6	63.1	63.1	60.5	60.5	60.5	58.1	55.5	35.3
90°	7.3	7.3	7.3	7.3	7.3	9.6	12.9	14.5	12.5	8.4	5.3
92.5°	29.1	23.3	29.1	35.0	36.4	51.6	71.7	81.8	71.9	52.0	37.0
95°	101.5	83.9	101.5	119.0	123.4	162.1	213.5	239.3	202.1	127.7	71.9
97.5°	243.1	209.8	243.1	276.6	284.9	309.3	341.9	358.1	296.0	172.0	79.0
100°	350.4	310.7	350.4	390.1	400.0	398.2	395.8	394.6	325.8	188.1	84.9
102.5°	455.8	421.8	455.8	489.8	498.3	467.2	425.7	405.0	335.2	195.6	90.8
105°	590.3	571.9	590.3	608.5	613.1	543.4	450.4	403.9	336.3	201.1	99.7
107.5°	678.3	682.7	678.3	673.9	672.8	575.5	445.7	380.9	321.3	202.1	112.7
110°	711.9	731.0	711.9	692.9	688.1	579.3	434.2	361.8	308.0	200.5	119.9



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	714.9	744.1	714.9	685.7	678.3	567.0	418.6	344.4	296.4	200.6	128.7
115°	696.0	736.5	696.0	655.4	645.3	538.0	395.0	323.5	283.2	202.5	141.9
117.5°	655.8	700.8	655.8	610.8	599.5	502.7	373.7	309.1	274.8	206.3	154.8
120°	623.3	667.1	623.3	579.6	568.7	480.3	362.3	303.4	272.1	209.3	162.3
122.5°	591.8	634.9	591.8	548.7	538.0	458.3	352.1	299.0	270.6	213.7	171.0
125°	546.8	586.6	546.8	507.1	497.2	429.6	339.3	294.2	269.4	219.6	182.3
127.5°	506.3	539.9	506.3	472.9	464.5	406.4	329.0	290.2	268.6	225.6	193.2
130°	482.5	513.4	482.5	451.5	443.8	392.1	323.2	288.7	269.1	229.9	200.5
132.5°	460.9	488.6	460.9	433.2	426.2	379.9	318.2	287.4	269.4	233.4	206.4
135°	431.2	455.1	431.2	407.3	401.4	362.6	310.9	285.1	269.1	237.2	213.3
137.5°	407.4	427.0	407.4	387.8	383.0	350.2	306.6	284.7	270.7	243.0	222.1
140°	391.1	409.4	391.1	372.8	368.2	340.0	302.3	283.3	271.0	246.5	228.1
142.5°	377.6	393.3	377.6	361.8	357.9	333.1	300.0	283.3	272.1	249.4	232.4
145°	357.4	369.2	357.4	345.4	342.5	322.1	295.0	281.4	272.1	253.3	239.1
147.5°	341.7	351.6	341.7	331.9	329.4	313.4	292.1	281.4	273.9	258.8	247.5
150°	332.0	340.0	332.0	323.9	321.9	308.5	290.4	281.4	274.8	261.8	251.9
152.5°	323.6	329.6	323.6	317.5	316.0	304.5	289.1	281.4	275.5	263.7	254.8
155°	313.9	317.9	313.9	309.9	308.9	299.8	287.6	281.4	277.0	267.9	261.1
157.5°	306.4	309.1	306.4	303.5	302.8	295.7	286.2	281.4	278.3	272.1	267.4
160°	301.8	303.4	301.8	300.2	299.8	293.7	285.5	281.4	279.0	274.0	270.3
162.5°	298.8	300.3	298.8	297.3	296.9	291.8	284.9	281.4	279.6	276.0	273.3
165°	294.5	296.1	294.5	292.9	292.5	288.8	283.9	281.4	280.7	279.1	277.8
167.5°	291.5	292.1	291.5	290.8	290.6	288.2	285.0	283.3	282.7	281.3	280.3
170°	290.6	290.6	290.6	290.6	290.6	288.2	285.0	283.3	283.3	283.3	283.2
172.5°	288.3	287.7	288.3	288.9	289.1	287.2	284.6	283.3	283.3	283.3	283.3
175°	287.0	287.0	287.0	287.0	287.0	285.7	284.1	283.3	283.7	284.5	285.1
177.5°	285.7	285.1	285.7	286.4	286.6	285.6	284.4	283.7	284.0	284.6	285.1
180°	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4
2.5°	2705.2	2690.1	2690.1	2664.9	2654.8	2647.3	2634.6	2596.7	2586.6	2576.6	2591.7
5°	2728.0	2700.2	2680.0	2634.6	2596.7	2581.6	2533.6	2442.8	2382.2	2336.8	2311.6
7.5°	2733.0	2697.7	2659.9	2589.2	2498.3	2458.0	2311.6	2145.0	2099.6	2059.3	2034.0
10°	2728.0	2687.6	2634.6	2528.6	2314.1	2243.5	2097.1	1988.6	1960.8	1953.3	1960.8
12.5°	2710.3	2672.5	2599.2	2422.6	2122.3	2074.4	1988.6	1925.5	1920.4	1933.0	2001.2
15°	2680.0	2644.7	2558.9	2281.3	2016.3	1981.0	1920.4	1897.7	1925.5	2013.8	2218.2
17.5°	2649.7	2609.3	2503.3	2142.5	1935.6	1910.4	1867.4	1912.9	2069.3	2187.9	2256.1
20°	2609.3	2561.4	2440.3	2041.6	1877.5	1854.8	1834.7	2039.0	2157.6	2200.5	2238.4
22.5°	2561.4	2511.0	2354.5	1970.9	1817.0	1799.3	1811.9	2109.7	2157.6	2187.9	2220.8
25°	2498.3	2455.4	2253.5	1915.3	1769.0	1748.8	1796.7	2102.1	2129.8	2137.5	2203.1
27.5°	2440.3	2384.7	2147.5	1864.9	1711.0	1703.4	1809.4	2069.3	2089.5	2097.1	2167.8
30°	2369.6	2286.4	2028.9	1811.9	1650.4	1647.9	1811.9	2028.9	2023.9	2044.1	2114.8
32.5°	2296.5	2140.0	1895.2	1746.3	1592.4	1589.9	1794.3	1968.4	1963.3	1991.1	2044.1
35°	2228.3	2026.4	1713.5	1670.6	1519.2	1521.7	1751.4	1897.7	1900.3	1925.5	1958.3
37.5°	2157.6	1928.0	1514.2	1587.3	1448.5	1448.5	1693.3	1832.1	1827.1	1834.7	1880.0
40°	2074.4	1774.1	1337.5	1478.8	1382.9	1375.3	1622.6	1761.4	1743.7	1741.3	1804.4
42.5°	1986.0	1605.0	1206.3	1335.0	1307.2	1297.1	1536.9	1675.6	1642.8	1650.4	1731.1
45°	1890.1	1559.5	1105.3	1128.0	1229.0	1221.4	1443.5	1577.2	1554.5	1574.7	1658.0
47.5°	1794.3	1468.7	1072.6	936.3	1145.7	1143.1	1340.1	1481.3	1468.7	1488.9	1577.2
50°	1663.0	1367.8	1070.0	802.5	1052.3	1062.4	1216.4	1388.0	1388.0	1405.7	1499.0
52.5°	1493.9	1244.1	971.6	726.8	943.8	974.1	1107.8	1307.2	1312.3	1329.9	1413.2
55°	1340.1	1115.4	900.9	668.8	815.1	880.7	1001.9	1223.9	1234.1	1251.7	1327.4
57.5°	1198.7	928.6	885.8	600.6	696.5	759.6	908.5	1143.1	1148.2	1163.4	1236.5
60°	1047.3	671.3	812.6	527.4	593.1	641.0	822.6	1047.3	1064.9	1075.0	1138.2
62.5°	875.6	487.0	736.9	476.9	542.5	552.7	752.1	956.4	979.2	986.7	1024.5
65°	623.3	408.8	625.8	434.0	489.5	492.1	676.3	863.0	883.3	895.9	923.6
67.5°	421.4	333.1	476.9	393.7	449.2	451.7	603.2	754.5	782.3	792.4	810.0
70°	292.7	222.0	353.3	350.8	403.8	408.8	524.9	656.1	681.4	688.9	699.1
72.5°	214.5	179.2	292.7	315.4	355.8	360.9	444.2	545.1	570.3	577.9	582.9
75°	164.1	189.3	237.2	275.0	302.8	305.3	363.4	444.2	461.8	466.9	469.4
77.5°	131.2	176.7	174.1	222.0	247.3	242.3	285.2	343.2	358.3	358.3	358.3
80°	98.5	138.8	131.2	159.0	181.7	176.7	204.4	244.8	249.8	254.9	252.3
82.5°	73.2	88.3	88.3	100.9	121.1	116.1	136.3	159.0	159.0	159.0	164.1
85°	45.5	50.4	40.4	53.0	68.1	65.6	75.7	85.8	88.3	88.3	83.3
87.5°	27.8	22.7	12.6	20.2	30.3	30.3	35.3	37.8	35.3	35.3	35.3
90°	5.0	3.4	1.9	3.4	5.0	5.3	8.4	12.5	14.5	12.9	9.6
92.5°	33.7	20.6	7.6	20.6	33.7	37.0	52.0	71.9	81.8	71.7	51.6
95°	66.0	42.1	18.3	42.1	66.0	71.9	127.7	202.1	239.3	213.5	162.1
97.5°	73.7	52.8	31.8	52.8	73.7	79.0	172.0	296.0	358.1	341.9	309.3
100°	80.1	61.1	42.1	61.1	80.1	84.9	188.1	325.8	394.6	395.8	398.2
102.5°	86.4	68.7	50.9	68.7	86.4	90.8	195.6	335.2	405.0	425.7	467.2
105°	96.0	80.9	65.8	80.9	96.0	99.7	201.1	336.3	403.9	450.4	543.4
107.5°	109.2	95.1	81.1	95.1	109.2	112.7	202.1	321.3	380.9	445.7	575.5
110°	116.8	104.1	91.5	104.1	116.8	119.9	200.5	308.0	361.8	434.2	579.3



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	125.7	113.6	101.6	113.6	125.7	128.7	200.6	296.4	344.4	418.6	567.0
115°	139.1	128.0	116.9	128.0	139.1	141.9	202.5	283.2	323.5	395.0	538.0
117.5°	152.2	142.1	132.0	142.1	152.2	154.8	206.3	274.8	309.1	373.7	502.7
120°	159.9	150.3	140.8	150.3	159.9	162.3	209.3	272.1	303.4	362.3	480.3
122.5°	168.7	159.0	149.4	159.0	168.7	171.0	213.7	270.6	299.0	352.1	458.3
125°	180.1	171.4	162.6	171.4	180.1	182.3	219.6	269.4	294.2	339.3	429.6
127.5°	191.0	182.1	173.3	182.1	191.0	193.2	225.6	268.6	290.2	329.0	406.4
130°	198.1	188.6	179.1	188.6	198.1	200.5	229.9	269.1	288.7	323.2	392.1
132.5°	204.0	194.5	185.0	194.5	204.0	206.4	233.4	269.4	287.4	318.2	379.9
135°	211.2	202.5	193.8	202.5	211.2	213.3	237.2	269.1	285.1	310.9	362.6
137.5°	219.9	211.3	202.7	211.3	219.9	222.1	243.0	270.7	284.7	306.6	350.2
140°	226.0	218.1	210.2	218.1	226.0	228.1	246.5	271.0	283.3	302.3	340.0
142.5°	230.6	223.3	216.0	223.3	230.6	232.4	249.4	272.1	283.3	300.0	333.1
145°	237.5	231.2	224.8	231.2	237.5	239.1	253.3	272.1	281.4	295.0	322.1
147.5°	246.0	239.8	233.6	239.8	246.0	247.5	258.8	273.9	281.4	292.1	313.4
150°	250.5	245.0	239.3	245.0	250.5	251.9	261.8	274.8	281.4	290.4	308.5
152.5°	253.7	249.4	245.2	249.4	253.7	254.8	263.7	275.5	281.4	289.1	304.5
155°	260.3	257.2	254.0	257.2	260.3	261.1	267.9	277.0	281.4	287.6	299.8
157.5°	266.6	263.6	260.5	263.6	266.6	267.4	272.1	278.3	281.4	286.2	295.7
160°	269.7	267.3	264.9	267.3	269.7	270.3	274.0	279.0	281.4	285.5	293.7
162.5°	272.8	271.1	269.3	271.1	272.8	273.3	276.0	279.6	281.4	284.9	291.8
165°	277.4	275.8	274.2	275.8	277.4	277.8	279.1	280.7	281.4	283.9	288.8
167.5°	280.1	279.3	278.6	279.3	280.1	280.3	281.3	282.7	283.3	285.0	288.2
170°	283.0	282.2	281.4	282.2	283.0	283.2	283.3	283.3	283.3	285.0	288.2
172.5°	283.3	283.2	283.0	283.2	283.3	283.3	283.3	283.3	283.3	284.6	287.2
175°	285.1	285.1	285.1	285.1	285.1	285.1	284.5	283.7	283.3	284.1	285.7
177.5°	285.1	285.1	285.1	285.1	285.1	285.1	284.6	284.0	283.7	284.4	285.6
180°	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4	2667.4
2.5°	2574.0	2566.5	2576.6	2548.8	2576.6	2566.5	2574.0	2591.7	2576.6	2586.6	2596.7
5°	2258.6	2246.0	2205.6	2172.8	2205.6	2246.0	2258.6	2311.6	2336.8	2382.2	2442.8
7.5°	2018.9	2008.7	1998.6	1978.5	1998.6	2008.7	2018.9	2034.0	2059.3	2099.6	2145.0
10°	1965.9	1968.4	1983.5	1981.0	1983.5	1968.4	1965.9	1960.8	1953.3	1960.8	1988.6
12.5°	2102.1	2124.9	2208.2	2203.1	2208.2	2124.9	2102.1	2001.2	1933.0	1920.4	1925.5
15°	2258.6	2266.1	2283.8	2286.4	2283.8	2266.1	2258.6	2218.2	2013.8	1925.5	1897.7
17.5°	2273.8	2276.2	2288.8	2288.8	2288.8	2276.2	2273.8	2256.1	2187.9	2069.3	1912.9
20°	2261.2	2266.1	2291.4	2296.5	2291.4	2266.1	2261.2	2238.4	2200.5	2157.6	2039.0
22.5°	2256.1	2266.1	2286.4	2283.8	2286.4	2266.1	2256.1	2220.8	2187.9	2157.6	2109.7
25°	2230.8	2230.8	2233.4	2235.8	2233.4	2230.8	2230.8	2203.1	2137.5	2129.8	2102.1
27.5°	2177.9	2182.8	2198.0	2195.5	2198.0	2182.8	2177.9	2167.8	2097.1	2089.5	2069.3
30°	2129.8	2124.9	2112.2	2102.1	2112.2	2124.9	2129.8	2114.8	2044.1	2023.9	2028.9
32.5°	2049.1	2036.5	2023.9	2016.3	2023.9	2036.5	2049.1	2044.1	1991.1	1963.3	1968.4
35°	1953.3	1955.7	1953.3	1945.6	1953.3	1955.7	1953.3	1958.3	1925.5	1900.3	1897.7
37.5°	1885.1	1890.1	1887.7	1877.5	1887.7	1890.1	1885.1	1880.0	1834.7	1827.1	1832.1
40°	1814.4	1817.0	1814.4	1806.9	1814.4	1817.0	1814.4	1804.4	1741.3	1743.7	1761.4
42.5°	1746.3	1743.7	1736.2	1731.1	1736.2	1743.7	1746.3	1731.1	1650.4	1642.8	1675.6
45°	1668.1	1670.6	1655.5	1647.9	1655.5	1670.6	1668.1	1658.0	1574.7	1554.5	1577.2
47.5°	1589.9	1589.9	1577.2	1569.6	1577.2	1589.9	1589.9	1577.2	1488.9	1468.7	1481.3
50°	1506.6	1504.0	1486.4	1483.9	1486.4	1504.0	1506.6	1499.0	1405.7	1388.0	1388.0
52.5°	1410.6	1410.6	1413.2	1418.3	1413.2	1410.6	1410.6	1413.2	1329.9	1312.3	1307.2
55°	1327.4	1329.9	1347.6	1352.7	1347.6	1329.9	1327.4	1327.4	1251.7	1234.1	1223.9
57.5°	1241.6	1241.6	1254.2	1254.2	1254.2	1241.6	1241.6	1236.5	1163.4	1148.2	1143.1
60°	1143.1	1148.2	1158.3	1155.8	1158.3	1148.2	1143.1	1138.2	1075.0	1064.9	1047.3
62.5°	1039.7	1044.8	1047.3	1042.2	1047.3	1044.8	1039.7	1024.5	986.7	979.2	956.4
65°	931.2	936.3	938.8	933.7	938.8	936.3	931.2	923.6	895.9	883.3	863.0
67.5°	820.2	817.7	815.1	825.2	815.1	817.7	820.2	810.0	792.4	782.3	754.5
70°	706.6	706.6	704.0	709.1	704.0	706.6	706.6	699.1	688.9	681.4	656.1
72.5°	585.5	582.9	593.1	585.5	593.1	582.9	585.5	582.9	577.9	570.3	545.1
75°	466.9	471.9	466.9	474.4	466.9	471.9	466.9	469.4	466.9	461.8	444.2
77.5°	355.8	360.9	355.8	355.8	355.8	360.9	355.8	358.3	358.3	358.3	343.2
80°	252.3	249.8	249.8	247.3	249.8	249.8	252.3	252.3	254.9	249.8	244.8
82.5°	161.5	159.0	159.0	164.1	159.0	159.0	161.5	164.1	159.0	159.0	159.0
85°	88.3	90.8	85.8	85.8	85.8	90.8	88.3	83.3	88.3	88.3	85.8
87.5°	32.9	30.3	30.3	30.3	30.3	30.3	32.9	35.3	35.3	35.3	37.8
90°	7.3	7.3	7.3	7.3	7.3	7.3	7.3	9.6	12.9	14.5	12.5
92.5°	36.4	35.0	29.1	23.3	29.1	35.0	36.4	51.6	71.7	81.8	71.9
95°	123.4	119.0	101.5	83.9	101.5	119.0	123.4	162.1	213.5	239.3	202.1
97.5°	284.9	276.6	243.1	209.8	243.1	276.6	284.9	309.3	341.9	358.1	296.0
100°	400.0	390.1	350.4	310.7	350.4	390.1	400.0	398.2	395.8	394.6	325.8
102.5°	498.3	489.8	455.8	421.8	455.8	489.8	498.3	467.2	425.7	405.0	335.2
105°	613.1	608.5	590.3	571.9	590.3	608.5	613.1	543.4	450.4	403.9	336.3
107.5°	672.8	673.9	678.3	682.7	678.3	673.9	672.8	575.5	445.7	380.9	321.3
110°	688.1	692.9	711.9	731.0	711.9	692.9	688.1	579.3	434.2	361.8	308.0



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	678.3	685.7	714.9	744.1	714.9	685.7	678.3	567.0	418.6	344.4	296.4
115°	645.3	655.4	696.0	736.5	696.0	655.4	645.3	538.0	395.0	323.5	283.2
117.5°	599.5	610.8	655.8	700.8	655.8	610.8	599.5	502.7	373.7	309.1	274.8
120°	568.7	579.6	623.3	667.1	623.3	579.6	568.7	480.3	362.3	303.4	272.1
122.5°	538.0	548.7	591.8	634.9	591.8	548.7	538.0	458.3	352.1	299.0	270.6
125°	497.2	507.1	546.8	586.6	546.8	507.1	497.2	429.6	339.3	294.2	269.4
127.5°	464.5	472.9	506.3	539.9	506.3	472.9	464.5	406.4	329.0	290.2	268.6
130°	443.8	451.5	482.5	513.4	482.5	451.5	443.8	392.1	323.2	288.7	269.1
132.5°	426.2	433.2	460.9	488.6	460.9	433.2	426.2	379.9	318.2	287.4	269.4
135°	401.4	407.3	431.2	455.1	431.2	407.3	401.4	362.6	310.9	285.1	269.1
137.5°	383.0	387.8	407.4	427.0	407.4	387.8	383.0	350.2	306.6	284.7	270.7
140°	368.2	372.8	391.1	409.4	391.1	372.8	368.2	340.0	302.3	283.3	271.0
142.5°	357.9	361.8	377.6	393.3	377.6	361.8	357.9	333.1	300.0	283.3	272.1
145°	342.5	345.4	357.4	369.2	357.4	345.4	342.5	322.1	295.0	281.4	272.1
147.5°	329.4	331.9	341.7	351.6	341.7	331.9	329.4	313.4	292.1	281.4	273.9
150°	321.9	323.9	332.0	340.0	332.0	323.9	321.9	308.5	290.4	281.4	274.8
152.5°	316.0	317.5	323.6	329.6	323.6	317.5	316.0	304.5	289.1	281.4	275.5
155°	308.9	309.9	313.9	317.9	313.9	309.9	308.9	299.8	287.6	281.4	277.0
157.5°	302.8	303.5	306.4	309.1	306.4	303.5	302.8	295.7	286.2	281.4	278.3
160°	299.8	300.2	301.8	303.4	301.8	300.2	299.8	293.7	285.5	281.4	279.0
162.5°	296.9	297.3	298.8	300.3	298.8	297.3	296.9	291.8	284.9	281.4	279.6
165°	292.5	292.9	294.5	296.1	294.5	292.9	292.5	288.8	283.9	281.4	280.7
167.5°	290.6	290.8	291.5	292.1	291.5	290.8	290.6	288.2	285.0	283.3	282.7
170°	290.6	290.6	290.6	290.6	290.6	290.6	290.6	288.2	285.0	283.3	283.3
172.5°	289.1	288.9	288.3	287.7	288.3	288.9	289.1	287.2	284.6	283.3	283.3
175°	287.0	287.0	287.0	287.0	287.0	287.0	287.0	285.7	284.1	283.3	283.7
177.5°	286.6	286.4	285.7	285.1	285.7	286.4	286.6	285.6	284.4	283.7	284.0
180°	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1



TEST NUMBER: P934095

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	2667.4	2667.4	2667.4	2667.4	2667.4
2.5°	2634.6	2647.3	2654.8	2664.9	2690.1
5°	2533.6	2581.6	2596.7	2634.6	2680.0
7.5°	2311.6	2458.0	2498.3	2589.2	2659.9
10°	2097.1	2243.5	2314.1	2528.6	2634.6
12.5°	1988.6	2074.4	2122.3	2422.6	2599.2
15°	1920.4	1981.0	2016.3	2281.3	2558.9
17.5°	1867.4	1910.4	1935.6	2142.5	2503.3
20°	1834.7	1854.8	1877.5	2041.6	2440.3
22.5°	1811.9	1799.3	1817.0	1970.9	2354.5
25°	1796.7	1748.8	1769.0	1915.3	2253.5
27.5°	1809.4	1703.4	1711.0	1864.9	2147.5
30°	1811.9	1647.9	1650.4	1811.9	2028.9
32.5°	1794.3	1589.9	1592.4	1746.3	1895.2
35°	1751.4	1521.7	1519.2	1670.6	1713.5
37.5°	1693.3	1448.5	1448.5	1587.3	1514.2
40°	1622.6	1375.3	1382.9	1478.8	1337.5
42.5°	1536.9	1297.1	1307.2	1335.0	1206.3
45°	1443.5	1221.4	1229.0	1128.0	1105.3
47.5°	1340.1	1143.1	1145.7	936.3	1072.6
50°	1216.4	1062.4	1052.3	802.5	1070.0
52.5°	1107.8	974.1	943.8	726.8	971.6
55°	1001.9	880.7	815.1	668.8	900.9
57.5°	908.5	759.6	696.5	600.6	885.8
60°	822.6	641.0	593.1	527.4	812.6
62.5°	752.1	552.7	542.5	476.9	736.9
65°	676.3	492.1	489.5	434.0	625.8
67.5°	603.2	451.7	449.2	393.7	476.9
70°	524.9	408.8	403.8	350.8	353.3
72.5°	444.2	360.9	355.8	315.4	292.7
75°	363.4	305.3	302.8	275.0	237.2
77.5°	285.2	242.3	247.3	222.0	174.1
80°	204.4	176.7	181.7	159.0	131.2
82.5°	136.3	116.1	121.1	100.9	88.3
85°	75.7	65.6	68.1	53.0	40.4
87.5°	35.3	30.3	30.3	20.2	12.6
90°	8.4	5.3	5.0	3.4	1.9
92.5°	52.0	37.0	33.7	20.6	7.6
95°	127.7	71.9	66.0	42.1	18.3
97.5°	172.0	79.0	73.7	52.8	31.8
100°	188.1	84.9	80.1	61.1	42.1
102.5°	195.6	90.8	86.4	68.7	50.9
105°	201.1	99.7	96.0	80.9	65.8
107.5°	202.1	112.7	109.2	95.1	81.1
110°	200.5	119.9	116.8	104.1	91.5



TEST NUMBER: P934095
 CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	200.6	128.7	125.7	113.6	101.6
115°	202.5	141.9	139.1	128.0	116.9
117.5°	206.3	154.8	152.2	142.1	132.0
120°	209.3	162.3	159.9	150.3	140.8
122.5°	213.7	171.0	168.7	159.0	149.4
125°	219.6	182.3	180.1	171.4	162.6
127.5°	225.6	193.2	191.0	182.1	173.3
130°	229.9	200.5	198.1	188.6	179.1
132.5°	233.4	206.4	204.0	194.5	185.0
135°	237.2	213.3	211.2	202.5	193.8
137.5°	243.0	222.1	219.9	211.3	202.7
140°	246.5	228.1	226.0	218.1	210.2
142.5°	249.4	232.4	230.6	223.3	216.0
145°	253.3	239.1	237.5	231.2	224.8
147.5°	258.8	247.5	246.0	239.8	233.6
150°	261.8	251.9	250.5	245.0	239.3
152.5°	263.7	254.8	253.7	249.4	245.2
155°	267.9	261.1	260.3	257.2	254.0
157.5°	272.1	267.4	266.6	263.6	260.5
160°	274.0	270.3	269.7	267.3	264.9
162.5°	276.0	273.3	272.8	271.1	269.3
165°	279.1	277.8	277.4	275.8	274.2
167.5°	281.3	280.3	280.1	279.3	278.6
170°	283.3	283.2	283.0	282.2	281.4
172.5°	283.3	283.3	283.3	283.2	283.0
175°	284.5	285.1	285.1	285.1	285.1
177.5°	284.6	285.1	285.1	285.1	285.1
180°	285.1	285.1	285.1	285.1	285.1



TEST NUMBER: P934095
 CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-STD-W-8-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.88	17.08	16.54	17.76	18.55	18.72	19.92	19.38	20.60	21.38
	3H	16.38	17.46	17.06	18.15	18.97	20.09	21.17	20.77	21.86	22.68
	4H	16.59	17.61	17.29	18.31	19.14	20.55	21.57	21.25	22.27	23.10
	6H	16.73	17.66	17.43	18.37	19.22	20.86	21.80	21.57	22.51	23.35
	8H	16.74	17.63	17.46	18.36	19.21	20.94	21.84	21.66	22.57	23.42
	12H	16.72	17.57	17.44	18.30	19.18	20.99	21.85	21.72	22.57	23.45
4H	2H	16.96	17.97	17.65	18.67	19.51	19.17	20.18	19.87	20.88	21.72
	3H	18.01	18.86	18.73	19.60	20.45	20.71	21.55	21.42	22.29	23.14
	4H	18.30	19.07	19.03	19.81	20.70	21.25	22.02	21.98	22.76	23.64
	6H	18.45	19.11	19.20	19.88	20.77	21.64	22.30	22.38	23.07	23.96
	8H	18.46	19.08	19.21	19.85	20.75	21.75	22.38	22.50	23.14	24.04
	12H	18.45	19.01	19.22	19.79	20.70	21.83	22.39	22.60	23.17	24.08
8H	4H	18.79	19.41	19.54	20.17	21.07	21.40	22.03	22.15	22.79	23.69
	6H	19.06	19.58	19.84	20.38	21.29	21.86	22.37	22.64	23.17	24.08
	8H	19.11	19.57	19.90	20.37	21.29	22.01	22.47	22.80	23.27	24.20
	12H	19.11	19.51	19.90	20.30	21.29	22.13	22.53	22.92	23.32	24.31
12H	4H	18.81	19.37	19.58	20.15	21.06	21.38	21.94	22.15	22.73	23.64
	6H	19.13	19.59	19.92	20.39	21.31	21.85	22.31	22.65	23.12	24.04
	8H	19.21	19.61	20.00	20.41	21.39	22.03	22.44	22.83	23.23	24.21