

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P934990

Luminaire Tested: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P934990
REPORT IS A COMBINATION OF REPORTS P933719 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10934.7 lumens
Efficiency: N/A
Efficacy: 117.6 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 93
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P934990
CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

Luminous Intensity Polar Plot

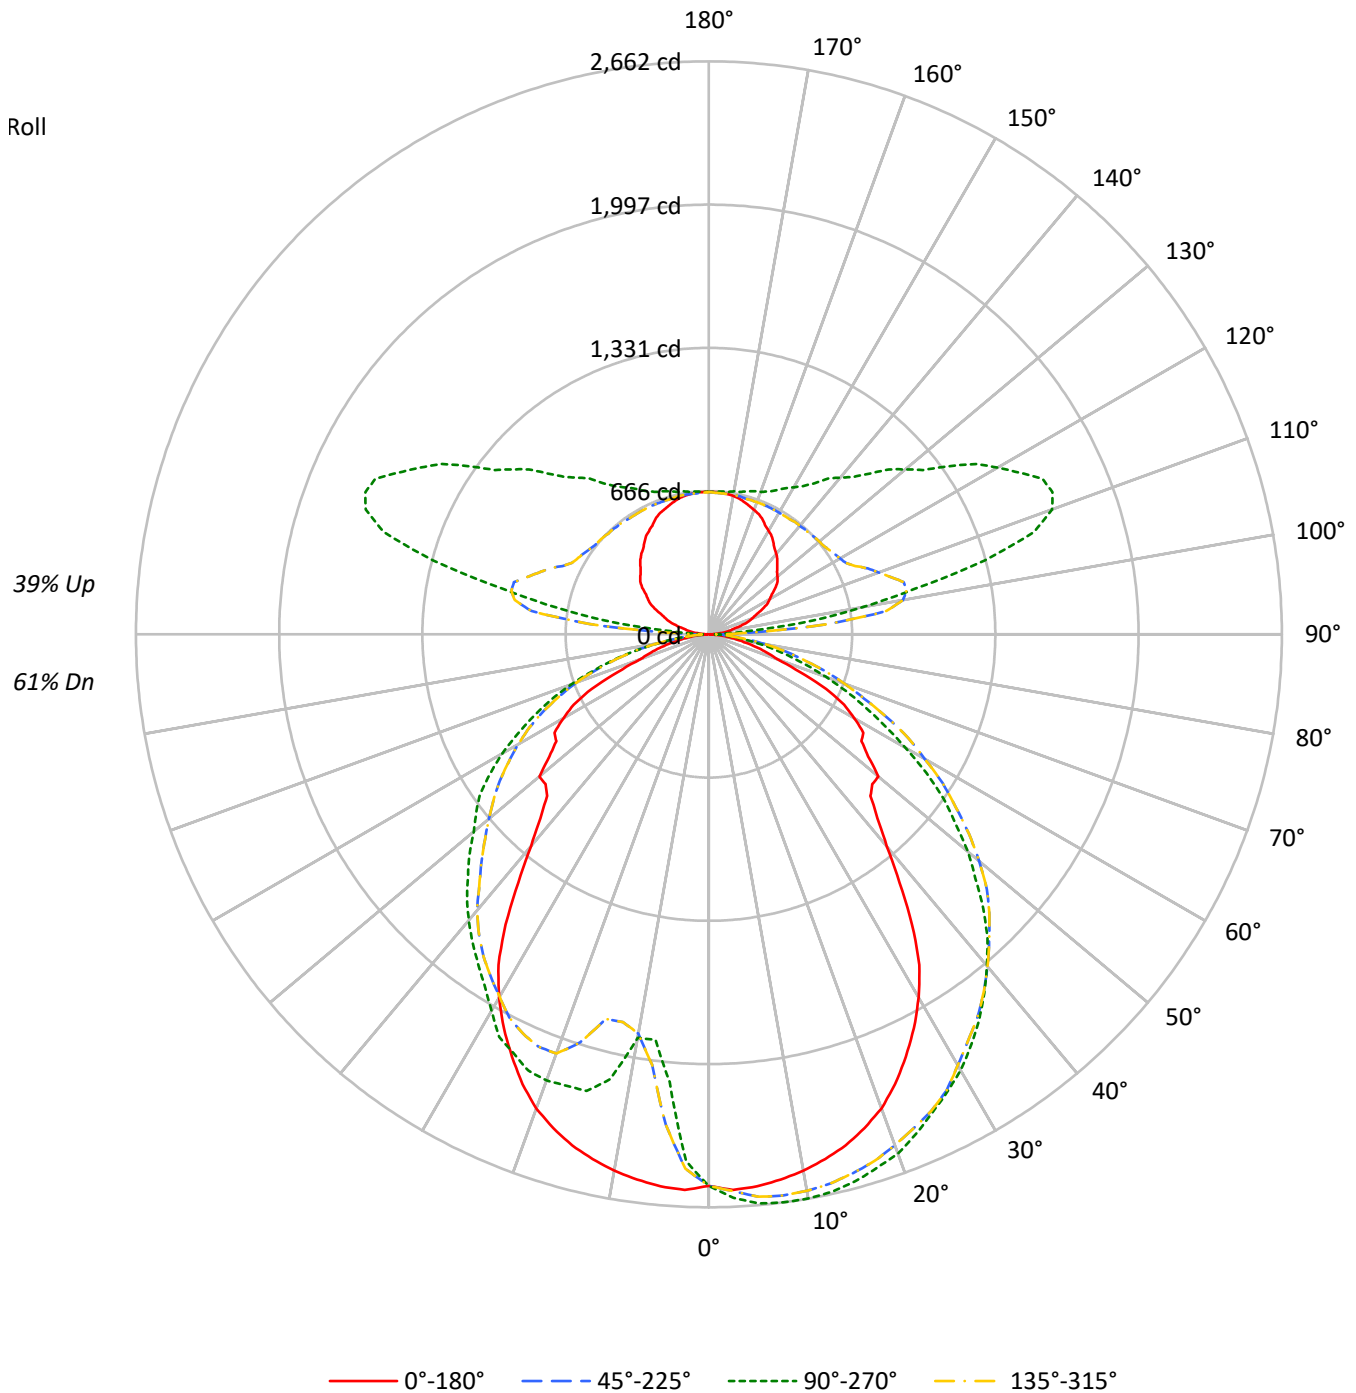



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	61
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56	51
2	91	84	78	72	85	79	73	68	69	65	61	60	57	54	52	49	47	43
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	40	36
4	76	65	57	51	71	61	54	49	54	48	44	47	43	39	41	37	35	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	65	52	44	38	60	49	42	36	44	37	33	38	33	30	33	29	26	24
7	60	47	39	33	56	45	37	32	39	33	29	35	30	26	30	26	23	21
8	55	43	35	29	52	40	33	28	36	30	26	32	27	23	28	24	21	19
9	52	39	31	26	48	37	30	25	33	27	23	29	24	21	26	22	19	17
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15850	15850	15850	15850
5°	15962	15999	15962	12580
10°	15850	15760	15850	11267
15°	15671	15419	15671	12874
20°	15338	15014	15338	12902
25°	14660	14424	14660	12628
30°	13788	13934	13788	12029
35°	12286	13315	12286	11368
40°	10231	12585	10231	10870
45°	9136	11732	9136	10297
50°	9699	10714	9699	9721
55°	9115	9616	9115	9389
60°	9386	8167	9386	8600
65°	8497	6751	8497	7547
70°	5868	5380	5868	6326
75°	5128	3978	5128	4763
80°	4104	2629	4104	2863
85°	2313	1392	2313	1184

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 14011 cd/sqm



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	231.3	2.1
10°-20°	656.6	6.0
20°-30°	1015.1	9.3
30°-40°	1211.8	11.1
40°-50°	1218.9	11.1
50°-60°	1060.5	9.7
60°-70°	751.9	6.9
70°-80°	397.8	3.6
80°-90°	101.6	0.9
90°-100°	322.5	2.9
100°-110°	847.9	7.8
110°-120°	879.2	8.0
120°-130°	705.2	6.4
130°-140°	553.4	5.1
140°-150°	424.7	3.9
150°-160°	305.9	2.8
160°-170°	187.1	1.7
170°-180°	63.2	0.6
0°-30°	1903.0	17.4
0°-40°	3114.7	28.5
0°-60°	5394.1	49.3
0°-90°	6645.5	60.8
90°-120°	2049.7	18.7
90°-150°	3733.0	34.1
90°-180°	4289.0	39.2
0°-180°	10934.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2562	2562	2562	2562	2562	
5°	2574	2654	2574	2087	2574	244
15°	2458	2630	2458	2196	2458	692
25°	2164	2453	2164	2148	2164	994
35°	1646	2189	1646	1869	1646	1018
45°	1062	1803	1062	1583	1062	850
55°	865	1331	865	1299	865	795
65°	601	802	601	897	601	575
75°	228	381	228	456	228	240
85°	39	97	39	82	39	52
90°	4	17	4	17	4	5
95°	43	195	43	195	43	47
105°	153	1328	153	1328	153	162
115°	271	1710	271	1710	271	268
125°	377	1362	377	1362	377	335
135°	450	1056	450	1056	450	348
145°	522	857	522	857	522	327
155°	590	738	590	738	590	271
165°	636	687	636	687	636	180
175°	662	666	662	666	662	63
180°	662	662	662	662	662	



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1
2.5°	2583.8	2583.8	2598.5	2603.2	2603.2	2596.0	2588.7	2596.0	2617.8	2625.1	2622.6
5°	2574.2	2593.6	2620.2	2625.1	2630.0	2627.5	2622.6	2627.5	2651.7	2656.6	2659.0
7.5°	2554.8	2591.1	2625.1	2632.4	2639.6	2632.4	2630.0	2634.7	2659.0	2663.9	2663.9
10°	2530.6	2581.5	2620.2	2625.1	2632.4	2625.1	2625.1	2634.7	2659.0	2663.9	2666.3
12.5°	2496.7	2566.9	2603.2	2608.1	2617.8	2615.4	2613.0	2622.6	2646.9	2651.7	2651.7
15°	2457.9	2540.2	2574.2	2579.1	2596.0	2591.1	2591.1	2600.8	2627.5	2634.7	2632.4
17.5°	2404.5	2506.3	2545.1	2552.3	2564.5	2562.1	2564.5	2574.2	2598.5	2603.2	2605.7
20°	2344.0	2460.3	2506.3	2513.6	2525.7	2525.7	2525.7	2537.8	2562.1	2571.7	2571.7
22.5°	2261.5	2411.8	2460.3	2465.1	2479.7	2479.7	2484.5	2501.4	2523.3	2525.7	2525.7
25°	2164.5	2358.5	2399.6	2414.2	2428.8	2436.0	2443.3	2453.0	2460.3	2457.9	2460.3
27.5°	2062.7	2290.6	2344.0	2353.6	2373.0	2380.2	2390.0	2392.4	2394.9	2402.1	2397.2
30°	1948.8	2196.0	2276.1	2285.7	2317.2	2322.1	2312.4	2317.2	2329.3	2334.2	2339.1
32.5°	1820.3	2055.4	2205.8	2227.5	2256.7	2242.1	2239.7	2246.9	2266.3	2266.3	2271.2
35°	1645.8	1946.4	2140.3	2159.7	2181.5	2164.5	2174.2	2176.6	2188.8	2196.0	2193.6
37.5°	1454.4	1851.8	2072.4	2087.0	2104.0	2082.1	2096.7	2104.0	2113.6	2108.8	2108.8
40°	1284.7	1704.0	1992.4	2002.2	2016.7	1999.7	2014.3	2019.2	2023.9	2019.2	2016.7
42.5°	1158.6	1541.6	1907.6	1919.7	1910.0	1922.1	1927.0	1936.7	1929.4	1919.7	1919.7
45°	1061.7	1498.0	1815.5	1830.1	1815.5	1834.9	1842.2	1842.2	1820.3	1815.5	1813.1
47.5°	1030.2	1410.7	1723.4	1723.4	1716.1	1740.4	1752.5	1735.5	1713.7	1706.4	1706.4
50°	1027.8	1313.8	1597.3	1587.7	1621.6	1650.7	1638.6	1621.6	1604.6	1577.9	1577.9
52.5°	933.2	1195.0	1435.0	1471.3	1524.7	1541.6	1522.2	1505.3	1476.1	1464.0	1454.4
55°	865.3	1071.3	1287.1	1359.8	1415.6	1437.4	1401.0	1384.1	1340.4	1333.2	1328.3
57.5°	850.8	892.0	1151.3	1243.5	1311.3	1308.9	1287.1	1255.5	1219.2	1212.0	1209.5
60°	780.5	644.7	1005.9	1115.0	1185.3	1178.0	1158.6	1129.6	1095.6	1090.8	1085.9
62.5°	707.8	467.9	841.1	964.7	1064.1	1061.7	1044.7	1001.0	976.9	964.7	955.0
65°	601.2	392.7	598.7	802.3	945.4	950.1	913.8	882.3	855.7	841.1	838.7
67.5°	458.1	319.9	404.8	669.0	831.4	826.6	780.5	765.9	732.0	724.7	710.2
70°	339.3	213.3	281.2	542.9	719.9	707.8	671.5	654.5	622.9	605.9	596.3
72.5°	281.2	172.1	206.0	421.7	605.9	591.4	559.9	540.5	513.9	499.4	489.6
75°	227.9	181.8	157.6	312.7	492.0	482.4	453.2	433.9	412.1	392.7	395.1
77.5°	167.2	169.7	126.1	230.3	390.2	375.7	358.7	334.5	324.8	305.4	305.4
80°	126.1	133.3	94.5	157.6	281.2	281.2	266.6	249.6	232.7	223.0	223.0
82.5°	84.8	84.8	70.3	99.4	191.5	184.2	174.5	169.7	160.0	155.1	155.1
85°	38.8	48.5	43.6	60.6	104.2	109.1	109.1	104.2	101.8	96.9	99.4
87.5°	12.1	21.8	26.6	33.9	53.3	55.8	58.2	58.2	58.2	60.6	60.6
90°	4.4	7.9	11.6	12.4	19.5	28.9	33.7	30.0	22.5	16.9	16.9
92.5°	17.8	47.9	78.1	85.7	120.4	166.8	190.0	166.6	119.6	84.3	81.0
95°	42.6	97.9	153.1	166.9	296.4	469.2	555.5	495.7	376.1	286.4	276.3
97.5°	73.7	122.4	171.1	183.4	399.4	687.3	831.3	793.5	718.0	661.2	641.9
100°	97.7	141.9	186.1	197.2	436.8	756.4	916.1	918.9	924.4	928.5	905.5
102.5°	118.1	159.4	200.6	211.0	454.0	778.0	940.1	988.2	1084.6	1156.8	1137.0
105°	152.8	187.8	222.7	231.4	466.7	780.5	937.4	1045.3	1261.3	1423.2	1412.6
107.5°	188.3	220.9	253.5	261.6	469.1	745.8	884.1	1034.7	1335.9	1561.8	1564.4
110°	212.3	241.7	271.0	278.4	465.5	715.0	839.7	1008.1	1344.8	1597.3	1608.4



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	235.8	263.8	291.8	298.8	465.7	688.1	799.3	971.6	1316.2	1574.6	1591.6
115°	271.3	297.2	323.0	329.5	470.0	657.2	750.9	916.9	1248.9	1497.8	1521.3
117.5°	306.4	329.9	353.3	359.3	478.7	637.9	717.6	867.4	1167.0	1391.7	1417.8
120°	326.8	349.0	371.0	376.6	485.8	631.4	704.3	841.2	1114.9	1320.2	1345.6
122.5°	346.9	369.1	391.5	397.0	496.0	628.1	694.1	817.3	1063.8	1248.7	1273.7
125°	377.4	397.8	418.1	423.2	509.8	625.2	683.0	787.7	997.1	1154.1	1177.1
127.5°	402.3	422.9	443.3	448.5	523.5	623.6	673.7	763.5	943.3	1078.2	1097.7
130°	415.6	437.8	459.8	465.4	533.7	624.7	670.1	750.2	910.2	1030.3	1048.2
132.5°	429.4	451.5	473.6	479.1	541.8	625.2	667.0	738.6	881.9	989.4	1005.4
135°	449.8	470.0	490.1	495.2	550.7	624.7	661.6	721.6	841.6	931.6	945.4
137.5°	470.7	490.6	510.5	515.5	563.9	628.5	660.8	711.5	812.9	889.0	900.4
140°	488.0	506.3	524.8	529.4	572.1	629.2	657.6	701.4	789.1	854.8	865.4
142.5°	501.4	518.4	535.4	539.6	578.9	631.4	657.6	696.1	773.1	830.8	840.0
145°	521.8	536.6	551.3	555.0	587.8	631.4	653.2	684.7	747.7	794.8	801.7
147.5°	542.2	556.6	571.0	574.6	600.8	635.7	653.2	678.0	727.5	764.7	770.4
150°	555.5	568.5	581.6	584.8	607.7	638.0	653.2	674.1	716.0	747.4	752.1
152.5°	569.3	579.2	589.0	591.5	612.1	639.5	653.2	671.1	706.8	733.6	737.2
155°	589.7	597.0	604.3	606.1	621.8	642.7	653.2	667.4	695.9	717.2	719.5
157.5°	604.8	612.0	619.0	620.8	631.6	646.1	653.2	664.3	686.4	703.0	704.6
160°	615.0	620.6	626.1	627.4	636.0	647.5	653.2	662.7	681.6	695.8	696.8
162.5°	625.2	629.4	633.5	634.6	640.8	649.1	653.2	661.2	677.2	689.2	690.1
165°	636.3	640.1	643.9	644.8	647.6	651.3	653.2	658.9	670.4	679.0	680.0
167.5°	646.5	648.3	650.1	650.5	652.9	656.1	657.6	661.3	668.9	674.5	674.9
170°	653.2	655.0	656.8	657.2	657.3	657.5	657.6	661.3	668.9	674.5	674.5
172.5°	656.8	657.1	657.5	657.6	657.6	657.6	657.6	660.6	666.5	671.0	670.6
175°	661.6	661.6	661.6	661.6	660.3	658.5	657.6	659.5	663.2	666.1	666.1
177.5°	661.6	661.6	661.6	661.6	660.6	659.2	658.6	660.1	663.1	665.3	664.9
180°	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1
2.5°	2627.5	2620.2	2627.5	2622.6	2625.1	2617.8	2596.0	2588.7	2596.0	2603.2	2603.2
5°	2659.0	2654.1	2659.0	2659.0	2656.6	2651.7	2627.5	2622.6	2627.5	2630.0	2625.1
7.5°	2668.7	2661.5	2668.7	2663.9	2663.9	2659.0	2634.7	2630.0	2632.4	2639.6	2632.4
10°	2668.7	2661.5	2668.7	2666.3	2663.9	2659.0	2634.7	2625.1	2625.1	2632.4	2625.1
12.5°	2656.6	2651.7	2656.6	2651.7	2651.7	2646.9	2622.6	2613.0	2615.4	2617.8	2608.1
15°	2637.2	2630.0	2637.2	2632.4	2634.7	2627.5	2600.8	2591.1	2591.1	2596.0	2579.1
17.5°	2608.1	2598.5	2608.1	2605.7	2603.2	2598.5	2574.2	2564.5	2562.1	2564.5	2552.3
20°	2574.2	2566.9	2574.2	2571.7	2571.7	2562.1	2537.8	2525.7	2525.7	2525.7	2513.6
22.5°	2520.8	2513.6	2520.8	2525.7	2525.7	2523.3	2501.4	2484.5	2479.7	2479.7	2465.1
25°	2460.3	2453.0	2460.3	2460.3	2457.9	2460.3	2453.0	2443.3	2436.0	2428.8	2414.2
27.5°	2402.1	2397.2	2402.1	2397.2	2402.1	2394.9	2392.4	2390.0	2380.2	2373.0	2353.6
30°	2344.0	2339.1	2344.0	2339.1	2334.2	2329.3	2317.2	2312.4	2322.1	2317.2	2285.7
32.5°	2271.2	2266.3	2271.2	2271.2	2266.3	2266.3	2246.9	2239.7	2242.1	2256.7	2227.5
35°	2196.0	2188.8	2196.0	2193.6	2196.0	2188.8	2176.6	2174.2	2164.5	2181.5	2159.7
37.5°	2108.8	2101.5	2108.8	2108.8	2108.8	2113.6	2104.0	2096.7	2082.1	2104.0	2087.0
40°	2019.2	2009.4	2019.2	2016.7	2019.2	2023.9	2019.2	2014.3	1999.7	2016.7	2002.2
42.5°	1917.4	1914.9	1917.4	1919.7	1919.7	1929.4	1936.7	1927.0	1922.1	1910.0	1919.7
45°	1808.2	1803.4	1808.2	1813.1	1815.5	1820.3	1842.2	1842.2	1834.9	1815.5	1830.1
47.5°	1691.9	1679.7	1691.9	1706.4	1706.4	1713.7	1735.5	1752.5	1740.4	1716.1	1723.4
50°	1568.3	1570.7	1568.3	1577.9	1577.9	1604.6	1621.6	1638.6	1650.7	1621.6	1587.7
52.5°	1447.1	1444.6	1447.1	1454.4	1464.0	1476.1	1505.3	1522.2	1541.6	1524.7	1471.3
55°	1325.8	1330.7	1325.8	1328.3	1333.2	1340.4	1384.1	1401.0	1437.4	1415.6	1359.8
57.5°	1204.6	1197.4	1204.6	1209.5	1212.0	1219.2	1255.5	1287.1	1308.9	1311.3	1243.5
60°	1064.1	1054.4	1064.1	1085.9	1090.8	1095.6	1129.6	1158.6	1178.0	1185.3	1115.0
62.5°	940.5	923.5	940.5	955.0	964.7	976.9	1001.0	1044.7	1061.7	1064.1	964.7
65°	809.6	802.3	809.6	838.7	841.1	855.7	882.3	913.8	950.1	945.4	802.3
67.5°	690.8	690.8	690.8	710.2	724.7	732.0	765.9	780.5	826.6	831.4	669.0
70°	581.7	579.3	581.7	596.3	605.9	622.9	654.5	671.5	707.8	719.9	542.9
72.5°	477.5	475.1	477.5	489.6	499.4	513.9	540.5	559.9	591.4	605.9	421.7
75°	385.4	380.6	385.4	395.1	392.7	412.1	433.9	453.2	482.4	492.0	312.7
77.5°	295.8	295.8	295.8	305.4	305.4	324.8	334.5	358.7	375.7	390.2	230.3
80°	220.6	218.1	220.6	223.0	223.0	232.7	249.6	266.6	281.2	281.2	157.6
82.5°	155.1	150.3	155.1	155.1	155.1	160.0	169.7	174.5	184.2	191.5	99.4
85°	96.9	96.9	96.9	99.4	96.9	101.8	104.2	109.1	109.1	104.2	60.6
87.5°	63.0	60.6	63.0	60.6	60.6	58.2	58.2	58.2	55.8	53.3	33.9
90°	16.9	16.9	16.9	16.9	16.9	22.5	30.0	33.7	28.9	19.5	12.4
92.5°	67.5	54.1	67.5	81.0	84.3	119.6	166.6	190.0	166.8	120.4	85.7
95°	235.6	194.9	235.6	276.3	286.4	376.1	495.7	555.5	469.2	296.4	166.9
97.5°	564.5	487.1	564.5	641.9	661.2	718.0	793.5	831.3	687.3	399.4	183.4
100°	813.3	721.1	813.3	905.5	928.5	924.4	918.9	916.1	756.4	436.8	197.2
102.5°	1058.1	979.2	1058.1	1137.0	1156.8	1084.6	988.2	940.1	778.0	454.0	211.0
105°	1370.1	1327.7	1370.1	1412.6	1423.2	1261.3	1045.3	937.4	780.5	466.7	231.4
107.5°	1574.6	1584.8	1574.6	1564.4	1561.8	1335.9	1034.7	884.1	745.8	469.1	261.6
110°	1652.5	1696.7	1652.5	1608.4	1597.3	1344.8	1008.1	839.7	715.0	465.5	278.4



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	1659.5	1727.4	1659.5	1591.6	1574.6	1316.2	971.6	799.3	688.1	465.7	298.8
115°	1615.5	1709.6	1615.5	1521.3	1497.8	1248.9	916.9	750.9	657.2	470.0	329.5
117.5°	1522.2	1626.6	1522.2	1417.8	1391.7	1167.0	867.4	717.6	637.9	478.7	359.3
120°	1447.0	1548.4	1447.0	1345.6	1320.2	1114.9	841.2	704.3	631.4	485.8	376.6
122.5°	1373.8	1473.9	1373.8	1273.7	1248.7	1063.8	817.3	694.1	628.1	496.0	397.0
125°	1269.4	1361.5	1269.4	1177.1	1154.1	997.1	787.7	683.0	625.2	509.8	423.2
127.5°	1175.4	1253.2	1175.4	1097.7	1078.2	943.3	763.5	673.7	623.6	523.5	448.5
130°	1120.0	1191.8	1120.0	1048.2	1030.3	910.2	750.2	670.1	624.7	533.7	465.4
132.5°	1069.8	1134.2	1069.8	1005.4	989.4	881.9	738.6	667.0	625.2	541.8	479.1
135°	1000.9	1056.4	1000.9	945.4	931.6	841.6	721.6	661.6	624.7	550.7	495.2
137.5°	945.7	991.2	945.7	900.4	889.0	812.9	711.5	660.8	628.5	563.9	515.5
140°	907.9	950.3	907.9	865.4	854.8	789.1	701.4	657.6	629.2	572.1	529.4
142.5°	876.5	913.0	876.5	840.0	830.8	773.1	696.1	657.6	631.4	578.9	539.6
145°	829.4	857.0	829.4	801.7	794.8	747.7	684.7	653.2	631.4	587.8	555.0
147.5°	793.2	816.1	793.2	770.4	764.7	727.5	678.0	653.2	635.7	600.8	574.6
150°	770.6	789.1	770.6	752.1	747.4	716.0	674.1	653.2	638.0	607.7	584.8
152.5°	751.1	765.1	751.1	737.2	733.6	706.8	671.1	653.2	639.5	612.1	591.5
155°	728.8	738.0	728.8	719.5	717.2	695.9	667.4	653.2	642.7	621.8	606.1
157.5°	711.1	717.6	711.1	704.6	703.0	686.4	664.3	653.2	646.1	631.6	620.8
160°	700.5	704.3	700.5	696.8	695.8	681.6	662.7	653.2	647.5	636.0	627.4
162.5°	693.6	697.2	693.6	690.1	689.2	677.2	661.2	653.2	649.1	640.8	634.6
165°	683.7	687.4	683.7	680.0	679.0	670.4	658.9	653.2	651.3	647.6	644.8
167.5°	676.5	678.0	676.5	674.9	674.5	668.9	661.3	657.6	656.1	652.9	650.5
170°	674.5	674.5	674.5	674.5	674.5	668.9	661.3	657.6	657.5	657.3	657.2
172.5°	669.3	667.8	669.3	670.6	671.0	666.5	660.6	657.6	657.6	657.6	657.6
175°	666.1	666.1	666.1	666.1	666.1	663.2	659.5	657.6	658.5	660.3	661.6
177.5°	663.2	661.6	663.2	664.9	665.3	663.1	660.1	658.6	659.2	660.6	661.6
180°	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1
2.5°	2598.5	2583.8	2583.8	2559.7	2549.9	2542.7	2530.6	2494.2	2484.5	2474.8	2489.3
5°	2620.2	2593.6	2574.2	2530.6	2494.2	2479.7	2433.6	2346.3	2288.2	2244.5	2220.3
7.5°	2625.1	2591.1	2554.8	2486.9	2399.6	2360.9	2220.3	2060.3	2016.7	1977.9	1953.6
10°	2620.2	2581.5	2530.6	2428.8	2222.8	2154.9	2014.3	1910.0	1883.4	1876.1	1883.4
12.5°	2603.2	2566.9	2496.7	2327.0	2038.5	1992.4	1910.0	1849.5	1844.6	1856.7	1922.1
15°	2574.2	2540.2	2457.9	2191.2	1936.7	1902.7	1844.6	1822.8	1849.5	1934.3	2130.6
17.5°	2545.1	2506.3	2404.5	2057.9	1859.1	1834.9	1793.7	1837.3	1987.6	2101.5	2167.0
20°	2506.3	2460.3	2344.0	1960.9	1803.4	1781.6	1762.2	1958.5	2072.4	2113.6	2150.0
22.5°	2460.3	2411.8	2261.5	1893.1	1745.2	1728.3	1740.4	2026.4	2072.4	2101.5	2133.0
25°	2399.6	2358.5	2164.5	1839.7	1699.1	1679.7	1725.8	2019.2	2045.8	2053.1	2116.1
27.5°	2344.0	2290.6	2062.7	1791.3	1643.4	1636.1	1737.9	1987.6	2007.0	2014.3	2082.1
30°	2276.1	2196.0	1948.8	1740.4	1585.2	1582.8	1740.4	1948.8	1944.0	1963.4	2031.2
32.5°	2205.8	2055.4	1820.3	1677.4	1529.5	1527.0	1723.4	1890.6	1885.8	1912.5	1963.4
35°	2140.3	1946.4	1645.8	1604.6	1459.1	1461.6	1682.2	1822.8	1825.2	1849.5	1881.0
37.5°	2072.4	1851.8	1454.4	1524.7	1391.3	1391.3	1626.5	1759.8	1754.9	1762.2	1805.8
40°	1992.4	1704.0	1284.7	1420.4	1328.3	1321.1	1558.6	1691.9	1674.9	1672.5	1733.1
42.5°	1907.6	1541.6	1158.6	1282.3	1255.5	1245.9	1476.1	1609.5	1577.9	1585.2	1662.8
45°	1815.5	1498.0	1061.7	1083.4	1180.5	1173.1	1386.5	1514.9	1493.1	1512.5	1592.5
47.5°	1723.4	1410.7	1030.2	899.2	1100.4	1098.1	1287.1	1422.9	1410.7	1430.1	1514.9
50°	1597.3	1313.8	1027.8	770.8	1010.8	1020.4	1168.3	1333.2	1333.2	1350.1	1439.8
52.5°	1435.0	1195.0	933.2	698.1	906.6	935.6	1064.1	1255.5	1260.4	1277.4	1357.3
55°	1287.1	1071.3	865.3	642.3	782.9	845.9	962.3	1175.6	1185.3	1202.2	1274.9
57.5°	1151.3	892.0	850.8	576.9	669.0	729.6	872.6	1098.1	1102.8	1117.4	1187.7
60°	1005.9	644.7	780.5	506.6	569.7	615.7	790.2	1005.9	1022.9	1032.5	1093.2
62.5°	841.1	467.9	707.8	458.1	521.1	530.8	722.4	918.6	940.5	947.7	984.1
65°	598.7	392.7	601.2	417.0	470.2	472.6	649.6	828.9	848.3	860.5	887.2
67.5°	404.8	319.9	458.1	378.1	431.5	433.9	579.3	724.7	751.4	761.1	778.0
70°	281.2	213.3	339.3	336.9	387.8	392.7	504.1	630.2	654.5	661.7	671.5
72.5°	206.0	172.1	281.2	303.0	341.8	346.7	426.6	523.5	547.8	555.0	559.9
75°	157.6	181.8	227.9	264.2	290.9	293.3	349.1	426.6	443.6	448.5	450.9
77.5°	126.1	169.7	167.2	213.3	237.5	232.7	273.9	329.7	344.2	344.2	344.2
80°	94.5	133.3	126.1	152.7	174.5	169.7	196.3	235.1	240.0	244.8	242.4
82.5°	70.3	84.8	84.8	96.9	116.3	111.5	130.9	152.7	152.7	152.7	157.6
85°	43.6	48.5	38.8	50.9	65.4	63.0	72.7	82.4	84.8	84.8	80.0
87.5°	26.6	21.8	12.1	19.4	29.1	29.1	33.9	36.4	33.9	33.9	33.9
90°	11.6	7.9	4.4	7.9	11.6	12.4	19.5	28.9	33.7	30.0	22.5
92.5°	78.1	47.9	17.8	47.9	78.1	85.7	120.4	166.8	190.0	166.6	119.6
95°	153.1	97.9	42.6	97.9	153.1	166.9	296.4	469.2	555.5	495.7	376.1
97.5°	171.1	122.4	73.7	122.4	171.1	183.4	399.4	687.3	831.3	793.5	718.0
100°	186.1	141.9	97.7	141.9	186.1	197.2	436.8	756.4	916.1	918.9	924.4
102.5°	200.6	159.4	118.1	159.4	200.6	211.0	454.0	778.0	940.1	988.2	1084.6
105°	222.7	187.8	152.8	187.8	222.7	231.4	466.7	780.5	937.4	1045.3	1261.3
107.5°	253.5	220.9	188.3	220.9	253.5	261.6	469.1	745.8	884.1	1034.7	1335.9
110°	271.0	241.7	212.3	241.7	271.0	278.4	465.5	715.0	839.7	1008.1	1344.8



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	291.8	263.8	235.8	263.8	291.8	298.8	465.7	688.1	799.3	971.6	1316.2
115°	323.0	297.2	271.3	297.2	323.0	329.5	470.0	657.2	750.9	916.9	1248.9
117.5°	353.3	329.9	306.4	329.9	353.3	359.3	478.7	637.9	717.6	867.4	1167.0
120°	371.0	349.0	326.8	349.0	371.0	376.6	485.8	631.4	704.3	841.2	1114.9
122.5°	391.5	369.1	346.9	369.1	391.5	397.0	496.0	628.1	694.1	817.3	1063.8
125°	418.1	397.8	377.4	397.8	418.1	423.2	509.8	625.2	683.0	787.7	997.1
127.5°	443.3	422.9	402.3	422.9	443.3	448.5	523.5	623.6	673.7	763.5	943.3
130°	459.8	437.8	415.6	437.8	459.8	465.4	533.7	624.7	670.1	750.2	910.2
132.5°	473.6	451.5	429.4	451.5	473.6	479.1	541.8	625.2	667.0	738.6	881.9
135°	490.1	470.0	449.8	470.0	490.1	495.2	550.7	624.7	661.6	721.6	841.6
137.5°	510.5	490.6	470.7	490.6	510.5	515.5	563.9	628.5	660.8	711.5	812.9
140°	524.8	506.3	488.0	506.3	524.8	529.4	572.1	629.2	657.6	701.4	789.1
142.5°	535.4	518.4	501.4	518.4	535.4	539.6	578.9	631.4	657.6	696.1	773.1
145°	551.3	536.6	521.8	536.6	551.3	555.0	587.8	631.4	653.2	684.7	747.7
147.5°	571.0	556.6	542.2	556.6	571.0	574.6	600.8	635.7	653.2	678.0	727.5
150°	581.6	568.5	555.5	568.5	581.6	584.8	607.7	638.0	653.2	674.1	716.0
152.5°	589.0	579.2	569.3	579.2	589.0	591.5	612.1	639.5	653.2	671.1	706.8
155°	604.3	597.0	589.7	597.0	604.3	606.1	621.8	642.7	653.2	667.4	695.9
157.5°	619.0	612.0	604.8	612.0	619.0	620.8	631.6	646.1	653.2	664.3	686.4
160°	626.1	620.6	615.0	620.6	626.1	627.4	636.0	647.5	653.2	662.7	681.6
162.5°	633.5	629.4	625.2	629.4	633.5	634.6	640.8	649.1	653.2	661.2	677.2
165°	643.9	640.1	636.3	640.1	643.9	644.8	647.6	651.3	653.2	658.9	670.4
167.5°	650.1	648.3	646.5	648.3	650.1	650.5	652.9	656.1	657.6	661.3	668.9
170°	656.8	655.0	653.2	655.0	656.8	657.2	657.3	657.5	657.6	661.3	668.9
172.5°	657.5	657.1	656.8	657.1	657.5	657.6	657.6	657.6	657.6	660.6	666.5
175°	661.6	661.6	661.6	661.6	661.6	661.6	660.3	658.5	657.6	659.5	663.2
177.5°	661.6	661.6	661.6	661.6	661.6	661.6	660.6	659.2	658.6	660.1	663.1
180°	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1	2562.1
2.5°	2472.4	2465.1	2474.8	2448.1	2474.8	2465.1	2472.4	2489.3	2474.8	2484.5	2494.2
5°	2169.4	2157.2	2118.5	2087.0	2118.5	2157.2	2169.4	2220.3	2244.5	2288.2	2346.3
7.5°	1939.1	1929.4	1919.7	1900.4	1919.7	1929.4	1939.1	1953.6	1977.9	2016.7	2060.3
10°	1888.2	1890.6	1905.2	1902.7	1905.2	1890.6	1888.2	1883.4	1876.1	1883.4	1910.0
12.5°	2019.2	2040.9	2121.0	2116.1	2121.0	2040.9	2019.2	1922.1	1856.7	1844.6	1849.5
15°	2169.4	2176.6	2193.6	2196.0	2193.6	2176.6	2169.4	2130.6	1934.3	1849.5	1822.8
17.5°	2183.9	2186.4	2198.5	2198.5	2198.5	2186.4	2183.9	2167.0	2101.5	1987.6	1837.3
20°	2171.9	2176.6	2200.9	2205.8	2200.9	2176.6	2171.9	2150.0	2113.6	2072.4	1958.5
22.5°	2167.0	2176.6	2196.0	2193.6	2196.0	2176.6	2167.0	2133.0	2101.5	2072.4	2026.4
25°	2142.7	2142.7	2145.1	2147.6	2145.1	2142.7	2142.7	2116.1	2053.1	2045.8	2019.2
27.5°	2091.8	2096.7	2111.2	2108.8	2111.2	2096.7	2091.8	2082.1	2014.3	2007.0	1987.6
30°	2045.8	2040.9	2028.8	2019.2	2028.8	2040.9	2045.8	2031.2	1963.4	1944.0	1948.8
32.5°	1968.3	1956.1	1944.0	1936.7	1944.0	1956.1	1968.3	1963.4	1912.5	1885.8	1890.6
35°	1876.1	1878.5	1876.1	1868.8	1876.1	1878.5	1876.1	1881.0	1849.5	1825.2	1822.8
37.5°	1810.7	1815.5	1813.1	1803.4	1813.1	1815.5	1810.7	1805.8	1762.2	1754.9	1759.8
40°	1742.8	1745.2	1742.8	1735.5	1742.8	1745.2	1742.8	1733.1	1672.5	1674.9	1691.9
42.5°	1677.4	1674.9	1667.6	1662.8	1667.6	1674.9	1677.4	1662.8	1585.2	1577.9	1609.5
45°	1602.2	1604.6	1590.1	1582.8	1590.1	1604.6	1602.2	1592.5	1512.5	1493.1	1514.9
47.5°	1527.0	1527.0	1514.9	1507.7	1514.9	1527.0	1527.0	1514.9	1430.1	1410.7	1422.9
50°	1447.1	1444.6	1427.7	1425.2	1427.7	1444.6	1447.1	1439.8	1350.1	1333.2	1333.2
52.5°	1355.0	1355.0	1357.3	1362.2	1357.3	1355.0	1355.0	1357.3	1277.4	1260.4	1255.5
55°	1274.9	1277.4	1294.4	1299.2	1294.4	1277.4	1274.9	1274.9	1202.2	1185.3	1175.6
57.5°	1192.6	1192.6	1204.6	1204.6	1204.6	1192.6	1192.6	1187.7	1117.4	1102.8	1098.1
60°	1098.1	1102.8	1112.6	1110.2	1112.6	1102.8	1098.1	1093.2	1032.5	1022.9	1005.9
62.5°	998.6	1003.5	1005.9	1001.0	1005.9	1003.5	998.6	984.1	947.7	940.5	918.6
65°	894.5	899.2	901.7	896.8	901.7	899.2	894.5	887.2	860.5	848.3	828.9
67.5°	787.8	785.3	782.9	792.6	782.9	785.3	787.8	778.0	761.1	751.4	724.7
70°	678.7	678.7	676.2	681.1	676.2	678.7	678.7	671.5	661.7	654.5	630.2
72.5°	562.3	559.9	569.7	562.3	569.7	559.9	562.3	559.9	555.0	547.8	523.5
75°	448.5	453.2	448.5	455.7	448.5	453.2	448.5	450.9	448.5	443.6	426.6
77.5°	341.8	346.7	341.8	341.8	341.8	346.7	341.8	344.2	344.2	344.2	329.7
80°	242.4	240.0	240.0	237.5	240.0	240.0	242.4	242.4	244.8	240.0	235.1
82.5°	155.1	152.7	152.7	157.6	152.7	152.7	155.1	157.6	152.7	152.7	152.7
85°	84.8	87.3	82.4	82.4	82.4	87.3	84.8	80.0	84.8	84.8	82.4
87.5°	31.5	29.1	29.1	29.1	29.1	29.1	31.5	33.9	33.9	33.9	36.4
90°	16.9	16.9	16.9	16.9	16.9	16.9	16.9	22.5	30.0	33.7	28.9
92.5°	84.3	81.0	67.5	54.1	67.5	81.0	84.3	119.6	166.6	190.0	166.8
95°	286.4	276.3	235.6	194.9	235.6	276.3	286.4	376.1	495.7	555.5	469.2
97.5°	661.2	641.9	564.5	487.1	564.5	641.9	661.2	718.0	793.5	831.3	687.3
100°	928.5	905.5	813.3	721.1	813.3	905.5	928.5	924.4	918.9	916.1	756.4
102.5°	1156.8	1137.0	1058.1	979.2	1058.1	1137.0	1156.8	1084.6	988.2	940.1	778.0
105°	1423.2	1412.6	1370.1	1327.7	1370.1	1412.6	1423.2	1261.3	1045.3	937.4	780.5
107.5°	1561.8	1564.4	1574.6	1584.8	1574.6	1564.4	1561.8	1335.9	1034.7	884.1	745.8
110°	1597.3	1608.4	1652.5	1696.7	1652.5	1608.4	1597.3	1344.8	1008.1	839.7	715.0



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	1574.6	1591.6	1659.5	1727.4	1659.5	1591.6	1574.6	1316.2	971.6	799.3	688.1
115°	1497.8	1521.3	1615.5	1709.6	1615.5	1521.3	1497.8	1248.9	916.9	750.9	657.2
117.5°	1391.7	1417.8	1522.2	1626.6	1522.2	1417.8	1391.7	1167.0	867.4	717.6	637.9
120°	1320.2	1345.6	1447.0	1548.4	1447.0	1345.6	1320.2	1114.9	841.2	704.3	631.4
122.5°	1248.7	1273.7	1373.8	1473.9	1373.8	1273.7	1248.7	1063.8	817.3	694.1	628.1
125°	1154.1	1177.1	1269.4	1361.5	1269.4	1177.1	1154.1	997.1	787.7	683.0	625.2
127.5°	1078.2	1097.7	1175.4	1253.2	1175.4	1097.7	1078.2	943.3	763.5	673.7	623.6
130°	1030.3	1048.2	1120.0	1191.8	1120.0	1048.2	1030.3	910.2	750.2	670.1	624.7
132.5°	989.4	1005.4	1069.8	1134.2	1069.8	1005.4	989.4	881.9	738.6	667.0	625.2
135°	931.6	945.4	1000.9	1056.4	1000.9	945.4	931.6	841.6	721.6	661.6	624.7
137.5°	889.0	900.4	945.7	991.2	945.7	900.4	889.0	812.9	711.5	660.8	628.5
140°	854.8	865.4	907.9	950.3	907.9	865.4	854.8	789.1	701.4	657.6	629.2
142.5°	830.8	840.0	876.5	913.0	876.5	840.0	830.8	773.1	696.1	657.6	631.4
145°	794.8	801.7	829.4	857.0	829.4	801.7	794.8	747.7	684.7	653.2	631.4
147.5°	764.7	770.4	793.2	816.1	793.2	770.4	764.7	727.5	678.0	653.2	635.7
150°	747.4	752.1	770.6	789.1	770.6	752.1	747.4	716.0	674.1	653.2	638.0
152.5°	733.6	737.2	751.1	765.1	751.1	737.2	733.6	706.8	671.1	653.2	639.5
155°	717.2	719.5	728.8	738.0	728.8	719.5	717.2	695.9	667.4	653.2	642.7
157.5°	703.0	704.6	711.1	717.6	711.1	704.6	703.0	686.4	664.3	653.2	646.1
160°	695.8	696.8	700.5	704.3	700.5	696.8	695.8	681.6	662.7	653.2	647.5
162.5°	689.2	690.1	693.6	697.2	693.6	690.1	689.2	677.2	661.2	653.2	649.1
165°	679.0	680.0	683.7	687.4	683.7	680.0	679.0	670.4	658.9	653.2	651.3
167.5°	674.5	674.9	676.5	678.0	676.5	674.9	674.5	668.9	661.3	657.6	656.1
170°	674.5	674.5	674.5	674.5	674.5	674.5	674.5	668.9	661.3	657.6	657.5
172.5°	671.0	670.6	669.3	667.8	669.3	670.6	671.0	666.5	660.6	657.6	657.6
175°	666.1	666.1	666.1	666.1	666.1	666.1	666.1	663.2	659.5	657.6	658.5
177.5°	665.3	664.9	663.2	661.6	663.2	664.9	665.3	663.1	660.1	658.6	659.2
180°	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	2562.1	2562.1	2562.1	2562.1	2562.1
2.5°	2530.6	2542.7	2549.9	2559.7	2583.8
5°	2433.6	2479.7	2494.2	2530.6	2574.2
7.5°	2220.3	2360.9	2399.6	2486.9	2554.8
10°	2014.3	2154.9	2222.8	2428.8	2530.6
12.5°	1910.0	1992.4	2038.5	2327.0	2496.7
15°	1844.6	1902.7	1936.7	2191.2	2457.9
17.5°	1793.7	1834.9	1859.1	2057.9	2404.5
20°	1762.2	1781.6	1803.4	1960.9	2344.0
22.5°	1740.4	1728.3	1745.2	1893.1	2261.5
25°	1725.8	1679.7	1699.1	1839.7	2164.5
27.5°	1737.9	1636.1	1643.4	1791.3	2062.7
30°	1740.4	1582.8	1585.2	1740.4	1948.8
32.5°	1723.4	1527.0	1529.5	1677.4	1820.3
35°	1682.2	1461.6	1459.1	1604.6	1645.8
37.5°	1626.5	1391.3	1391.3	1524.7	1454.4
40°	1558.6	1321.1	1328.3	1420.4	1284.7
42.5°	1476.1	1245.9	1255.5	1282.3	1158.6
45°	1386.5	1173.1	1180.5	1083.4	1061.7
47.5°	1287.1	1098.1	1100.4	899.2	1030.2
50°	1168.3	1020.4	1010.8	770.8	1027.8
52.5°	1064.1	935.6	906.6	698.1	933.2
55°	962.3	845.9	782.9	642.3	865.3
57.5°	872.6	729.6	669.0	576.9	850.8
60°	790.2	615.7	569.7	506.6	780.5
62.5°	722.4	530.8	521.1	458.1	707.8
65°	649.6	472.6	470.2	417.0	601.2
67.5°	579.3	433.9	431.5	378.1	458.1
70°	504.1	392.7	387.8	336.9	339.3
72.5°	426.6	346.7	341.8	303.0	281.2
75°	349.1	293.3	290.9	264.2	227.9
77.5°	273.9	232.7	237.5	213.3	167.2
80°	196.3	169.7	174.5	152.7	126.1
82.5°	130.9	111.5	116.3	96.9	84.8
85°	72.7	63.0	65.4	50.9	38.8
87.5°	33.9	29.1	29.1	19.4	12.1
90°	19.5	12.4	11.6	7.9	4.4
92.5°	120.4	85.7	78.1	47.9	17.8
95°	296.4	166.9	153.1	97.9	42.6
97.5°	399.4	183.4	171.1	122.4	73.7
100°	436.8	197.2	186.1	141.9	97.7
102.5°	454.0	211.0	200.6	159.4	118.1
105°	466.7	231.4	222.7	187.8	152.8
107.5°	469.1	261.6	253.5	220.9	188.3
110°	465.5	278.4	271.0	241.7	212.3



TEST NUMBER: P934990

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	465.7	298.8	291.8	263.8	235.8
115°	470.0	329.5	323.0	297.2	271.3
117.5°	478.7	359.3	353.3	329.9	306.4
120°	485.8	376.6	371.0	349.0	326.8
122.5°	496.0	397.0	391.5	369.1	346.9
125°	509.8	423.2	418.1	397.8	377.4
127.5°	523.5	448.5	443.3	422.9	402.3
130°	533.7	465.4	459.8	437.8	415.6
132.5°	541.8	479.1	473.6	451.5	429.4
135°	550.7	495.2	490.1	470.0	449.8
137.5°	563.9	515.5	510.5	490.6	470.7
140°	572.1	529.4	524.8	506.3	488.0
142.5°	578.9	539.6	535.4	518.4	501.4
145°	587.8	555.0	551.3	536.6	521.8
147.5°	600.8	574.6	571.0	556.6	542.2
150°	607.7	584.8	581.6	568.5	555.5
152.5°	612.1	591.5	589.0	579.2	569.3
155°	621.8	606.1	604.3	597.0	589.7
157.5°	631.6	620.8	619.0	612.0	604.8
160°	636.0	627.4	626.1	620.6	615.0
162.5°	640.8	634.6	633.5	629.4	625.2
165°	647.6	644.8	643.9	640.1	636.3
167.5°	652.9	650.5	650.1	648.3	646.5
170°	657.3	657.2	656.8	655.0	653.2
172.5°	657.6	657.6	657.5	657.1	656.8
175°	660.3	661.6	661.6	661.6	661.6
177.5°	660.6	661.6	661.6	661.6	661.6
180°	661.6	661.6	661.6	661.6	661.6



TEST NUMBER: P934990
 CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-STD-W-6-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.34	16.31	16.20	17.19	18.30	18.17	19.13	19.02	20.01	21.12
	3H	15.83	16.69	16.70	17.58	18.72	19.52	20.38	20.39	21.27	22.41
	4H	16.02	16.84	16.91	17.74	18.88	19.97	20.78	20.85	21.68	22.83
	6H	16.15	16.90	17.05	17.81	18.96	20.25	21.01	21.15	21.91	23.07
	8H	16.15	16.87	17.06	17.79	18.95	20.33	21.05	21.24	21.97	23.13
	12H	16.13	16.81	17.04	17.73	18.91	20.37	21.06	21.29	21.97	23.16
4H	2H	16.39	17.21	17.28	18.10	19.25	18.59	19.41	19.48	20.30	21.45
	3H	17.42	18.11	18.33	19.03	20.19	20.10	20.79	21.01	21.71	22.87
	4H	17.70	18.33	18.62	19.25	20.43	20.63	21.26	21.55	22.18	23.37
	6H	17.83	18.37	18.76	19.32	20.51	21.00	21.54	21.93	22.49	23.67
	8H	17.84	18.34	18.77	19.29	20.49	21.11	21.61	22.04	22.55	23.76
	12H	17.81	18.27	18.77	19.23	20.43	21.17	21.62	22.12	22.58	23.79
8H	4H	18.16	18.67	19.10	19.61	20.81	20.77	21.27	21.70	22.21	23.41
	6H	18.43	18.85	19.39	19.83	21.03	21.21	21.62	22.16	22.60	23.80
	8H	18.47	18.84	19.44	19.81	21.03	21.36	21.73	22.33	22.70	23.92
	12H	18.46	18.79	19.43	19.75	21.02	21.46	21.78	22.43	22.75	24.02
12H	4H	18.18	18.63	19.13	19.59	20.79	20.74	21.19	21.69	22.15	23.35
	6H	18.49	18.86	19.46	19.83	21.05	21.20	21.57	22.17	22.54	23.76
	8H	18.56	18.89	19.53	19.85	21.12	21.37	21.69	22.34	22.66	23.93