

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936295

Luminaire Tested: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936295
REPORT IS A COMBINATION OF REPORTS P933453 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4930.7 lumens
Efficiency: N/A
Efficacy: 112.1 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 44
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936295
CATALOG NUMBER: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K

Luminous Intensity Polar Plot

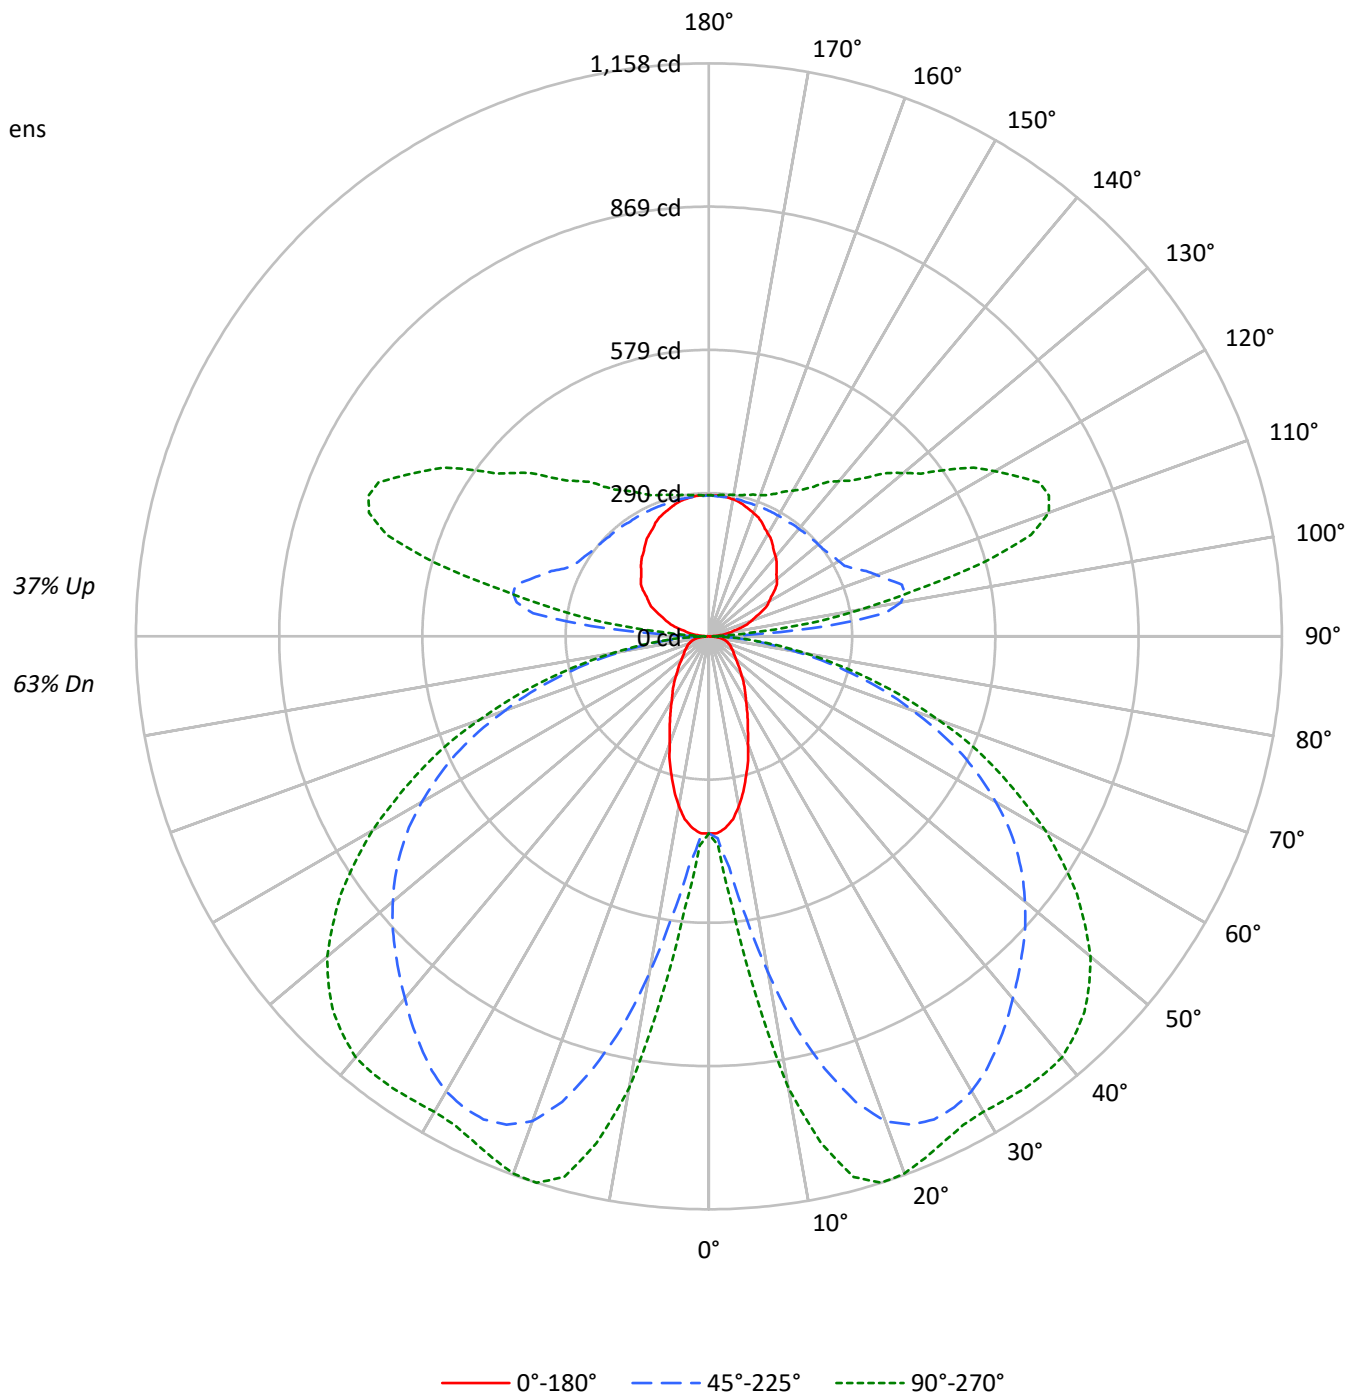



TEST NUMBER: P936295

CATALOG NUMBER: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	68	68	68	63
1	100	95	91	87	93	89	86	82	78	75	73	68	66	64	59	57	56	51
2	90	82	76	70	84	77	71	66	68	63	59	59	55	52	51	48	46	42
3	82	72	64	57	76	67	60	55	59	53	49	51	47	43	44	41	38	34
4	75	63	54	48	69	59	52	46	52	46	41	45	40	37	39	35	32	29
5	68	56	47	41	63	52	45	39	46	40	35	40	35	31	35	31	28	24
6	63	50	41	35	58	47	39	33	41	35	30	36	31	27	31	27	24	21
7	58	45	36	30	54	42	34	29	37	31	26	33	27	23	28	24	21	18
8	53	40	32	26	50	38	31	25	34	27	23	30	24	21	26	22	18	16
9	50	37	29	23	46	35	27	22	31	25	20	27	22	18	24	19	16	14
10	46	34	26	21	43	32	25	20	28	22	18	25	20	16	22	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1848	1848	1848
5°	1806	2136	2484
10°	1638	3114	4119
15°	1392	4069	4973
20°	1133	4715	5069
25°	945	4933	4965
30°	797	4965	4956
35°	705	4882	5084
40°	614	4775	5217
45°	557	4696	5237
50°	510	4626	5151
55°	489	4522	4922
60°	500	4324	4562
65°	521	4022	4066
70°	555	3508	3436
75°	615	2860	2681
80°	671	1983	1806
85°	596	1053	925

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 5237 cd/sqm



TEST NUMBER: P936295

CATALOG NUMBER: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.5	1.0
10°-20°	228.4	4.6
20°-30°	399.5	8.1
30°-40°	514.2	10.4
40°-50°	574.4	11.6
50°-60°	550.2	11.2
60°-70°	436.0	8.8
70°-80°	256.4	5.2
80°-90°	72.3	1.5
90°-100°	138.9	2.8
100°-110°	365.3	7.4
110°-120°	378.8	7.7
120°-130°	303.8	6.2
130°-140°	238.4	4.8
140°-150°	183.0	3.7
150°-160°	131.8	2.7
160°-170°	80.6	1.6
170°-180°	27.2	0.6
0°-30°	679.4	13.8
0°-40°	1193.6	24.2
0°-60°	2318.2	47.0
0°-90°	3082.9	62.5
90°-120°	883.0	17.9
90°-150°	1608.2	32.6
90°-180°	1848.0	37.5
0°-180°	4930.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	398	398	398	398	398	
5°	388	416	469	530	550	36
15°	291	537	904	1096	1131	81
25°	186	608	1077	1125	1126	86
35°	126	582	1014	1072	1114	78
45°	86	464	897	1027	1073	66
55°	62	295	761	884	908	56
65°	49	156	565	635	644	48
75°	36	96	310	341	342	38
85°	13	29	77	84	86	14
90°	2	5	14	7	7	2
95°	18	72	239	123	84	20
105°	66	100	404	613	572	70
115°	117	142	324	645	736	115
125°	163	182	294	497	587	144
135°	194	213	285	401	455	150
145°	225	239	281	342	369	141
155°	254	261	281	309	318	117
165°	274	278	281	292	296	77
175°	285	285	283	287	287	27
180°	285	285	285	285	285	



TEST NUMBER: P936295

CATALOG NUMBER: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3
2.5°	398.3	398.3	400.9	402.2	404.7	406.1	408.6	411.2	418.9	420.1	422.7
5°	388.1	393.3	409.9	416.3	434.2	458.6	468.8	485.4	520.1	530.3	536.7
7.5°	372.7	384.3	425.3	435.5	480.4	544.4	571.3	607.2	662.2	689.1	710.9
10°	348.4	372.7	445.8	470.1	543.1	640.4	690.5	740.4	823.6	860.7	874.9
12.5°	321.5	361.2	467.6	500.8	605.9	748.1	808.3	863.3	958.2	1008.1	1015.7
15°	290.8	344.6	488.0	536.7	672.5	837.7	904.4	972.2	1060.6	1096.4	1105.4
17.5°	263.9	331.8	507.3	558.5	723.7	918.4	986.3	1042.7	1114.4	1138.7	1145.1
20°	230.5	311.2	520.1	586.7	777.6	977.3	1042.7	1086.2	1134.9	1150.3	1152.9
22.5°	206.2	289.5	527.7	596.9	813.4	1013.3	1068.3	1102.9	1136.2	1141.3	1142.6
25°	185.7	265.1	526.5	608.4	844.1	1035.0	1077.2	1102.9	1122.1	1124.7	1124.7
27.5°	166.6	238.3	521.3	611.0	867.2	1040.1	1073.4	1091.4	1100.4	1105.4	1105.4
30°	149.8	212.7	508.5	605.9	877.5	1035.0	1061.9	1070.8	1079.8	1087.6	1091.4
32.5°	137.0	188.3	489.3	595.6	878.7	1022.1	1041.4	1046.5	1059.3	1077.2	1083.6
35°	125.5	164.0	467.6	581.5	871.1	1001.7	1014.5	1019.7	1045.2	1072.2	1081.1
37.5°	114.0	146.0	439.4	557.2	859.5	977.3	986.3	995.3	1035.0	1067.0	1077.2
40°	102.5	130.6	406.1	530.3	841.5	947.9	955.6	969.7	1022.1	1059.3	1069.6
42.5°	93.5	117.8	370.2	502.1	818.5	914.6	926.2	946.6	1006.9	1046.5	1058.0
45°	85.9	105.0	331.8	463.7	789.0	880.0	896.6	924.8	988.9	1027.3	1037.5
47.5°	78.1	96.1	292.0	424.0	757.0	845.5	867.2	899.2	964.6	1001.7	1010.7
50°	71.7	87.1	252.3	381.7	722.5	808.3	833.9	867.2	933.8	968.4	979.9
52.5°	66.6	79.5	215.2	339.4	682.7	769.8	799.3	833.9	896.6	930.0	937.6
55°	61.5	73.1	183.2	294.6	641.8	728.9	760.8	794.2	855.7	883.9	889.0
57.5°	58.9	67.9	156.2	252.3	598.2	682.7	718.6	749.4	807.0	828.7	833.9
60°	55.1	64.1	135.8	216.5	550.8	639.2	669.9	700.7	749.4	767.2	771.2
62.5°	51.3	61.5	120.4	181.9	502.1	588.0	618.6	646.9	687.9	700.7	705.8
65°	48.7	58.9	108.9	156.2	452.2	534.1	564.9	589.2	622.6	635.4	637.9
67.5°	46.1	56.3	99.9	134.5	402.2	480.4	503.4	526.5	552.1	564.9	566.1
70°	42.3	53.8	92.3	119.1	351.0	418.9	438.1	462.4	482.9	489.3	493.2
72.5°	39.7	49.9	87.1	107.6	298.4	359.9	377.9	391.9	409.9	416.3	416.3
75°	35.9	44.8	81.9	96.1	244.7	294.6	310.0	324.0	338.2	340.7	336.9
77.5°	32.0	39.7	70.5	80.7	190.9	233.1	245.9	253.6	265.1	267.7	269.0
80°	26.9	34.6	55.1	62.7	138.4	171.6	180.6	187.0	197.3	197.3	199.8
82.5°	20.5	26.9	39.7	44.8	93.5	117.8	125.5	129.4	135.8	135.8	135.8
85°	12.8	16.6	25.6	29.4	56.3	71.7	76.9	78.1	83.3	84.5	84.5
87.5°	6.4	9.0	16.6	18.0	29.4	37.1	37.1	39.7	39.7	38.4	37.1
90°	1.9	3.4	5.0	5.3	8.4	12.5	14.5	12.9	9.6	7.3	7.3
92.5°	7.6	20.6	33.7	37.0	52.0	71.9	81.8	71.7	51.6	36.4	35.0
95°	18.3	42.1	66.0	71.9	127.7	202.1	239.3	213.5	162.1	123.4	119.0
97.5°	31.8	52.8	73.7	79.0	172.0	296.0	358.1	341.9	309.3	284.9	276.6
100°	42.1	61.1	80.1	84.9	188.1	325.8	394.6	395.8	398.2	400.0	390.1
102.5°	50.9	68.7	86.4	90.8	195.6	335.2	405.0	425.7	467.2	498.3	489.8
105°	65.8	80.9	96.0	99.7	201.1	336.3	403.9	450.4	543.4	613.1	608.5
107.5°	81.1	95.1	109.2	112.7	202.1	321.3	380.9	445.7	575.5	672.8	673.9
110°	91.5	104.1	116.8	119.9	200.5	308.0	361.8	434.2	579.3	688.1	692.9



TEST NUMBER: P936295

CATALOG NUMBER: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	101.6	113.6	125.7	128.7	200.6	296.4	344.4	418.6	567.0	678.3	685.7
115°	116.9	128.0	139.1	141.9	202.5	283.2	323.5	395.0	538.0	645.3	655.4
117.5°	132.0	142.1	152.2	154.8	206.3	274.8	309.1	373.7	502.7	599.5	610.8
120°	140.8	150.3	159.9	162.3	209.3	272.1	303.4	362.3	480.3	568.7	579.6
122.5°	149.4	159.0	168.7	171.0	213.7	270.6	299.0	352.1	458.3	538.0	548.7
125°	162.6	171.4	180.1	182.3	219.6	269.4	294.2	339.3	429.6	497.2	507.1
127.5°	173.3	182.1	191.0	193.2	225.6	268.6	290.2	329.0	406.4	464.5	472.9
130°	179.1	188.6	198.1	200.5	229.9	269.1	288.7	323.2	392.1	443.8	451.5
132.5°	185.0	194.5	204.0	206.4	233.4	269.4	287.4	318.2	379.9	426.2	433.2
135°	193.8	202.5	211.2	213.3	237.2	269.1	285.1	310.9	362.6	401.4	407.3
137.5°	202.7	211.3	219.9	222.1	243.0	270.7	284.7	306.6	350.2	383.0	387.8
140°	210.2	218.1	226.0	228.1	246.5	271.0	283.3	302.3	340.0	368.2	372.8
142.5°	216.0	223.3	230.6	232.4	249.4	272.1	283.3	300.0	333.1	357.9	361.8
145°	224.8	231.2	237.5	239.1	253.3	272.1	281.4	295.0	322.1	342.5	345.4
147.5°	233.6	239.8	246.0	247.5	258.8	273.9	281.4	292.1	313.4	329.4	331.9
150°	239.3	245.0	250.5	251.9	261.8	274.8	281.4	290.4	308.5	321.9	323.9
152.5°	245.2	249.4	253.7	254.8	263.7	275.5	281.4	289.1	304.5	316.0	317.5
155°	254.0	257.2	260.3	261.1	267.9	277.0	281.4	287.6	299.8	308.9	309.9
157.5°	260.5	263.6	266.6	267.4	272.1	278.3	281.4	286.2	295.7	302.8	303.5
160°	264.9	267.3	269.7	270.3	274.0	279.0	281.4	285.5	293.7	299.8	300.2
162.5°	269.3	271.1	272.8	273.3	276.0	279.6	281.4	284.9	291.8	296.9	297.3
165°	274.2	275.8	277.4	277.8	279.1	280.7	281.4	283.9	288.8	292.5	292.9
167.5°	278.6	279.3	280.1	280.3	281.3	282.7	283.3	285.0	288.2	290.6	290.8
170°	281.4	282.2	283.0	283.2	283.3	283.3	283.3	285.0	288.2	290.6	290.6
172.5°	283.0	283.2	283.3	283.3	283.3	283.3	283.3	284.6	287.2	289.1	288.9
175°	285.1	285.1	285.1	285.1	284.5	283.7	283.3	284.1	285.7	287.0	287.0
177.5°	285.1	285.1	285.1	285.1	284.6	284.0	283.7	284.4	285.6	286.6	286.4
180°	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1	285.1



TEST NUMBER: P936295
CATALOG NUMBER: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	398.3	398.3
2.5°	425.3	422.7
5°	546.9	549.5
7.5°	736.5	735.3
10°	915.8	927.4
12.5°	1046.5	1049.1
15°	1125.9	1131.1
17.5°	1156.7	1157.9
20°	1157.9	1155.4
22.5°	1143.9	1141.3
25°	1127.2	1125.9
27.5°	1111.8	1113.1
30°	1105.4	1109.3
32.5°	1105.4	1111.8
35°	1108.0	1114.4
37.5°	1106.7	1114.4
40°	1101.6	1110.6
42.5°	1087.6	1094.0
45°	1065.8	1073.4
47.5°	1037.5	1042.7
50°	1001.7	1006.9
52.5°	956.8	958.2
55°	903.0	908.2
57.5°	845.5	846.7
60°	781.4	785.2
62.5°	713.5	713.5
65°	641.8	644.3
67.5°	567.5	573.9
70°	491.9	493.2
72.5°	417.6	417.6
75°	340.7	342.0
77.5°	267.7	267.7
80°	198.5	199.8
82.5°	137.0	139.6
85°	85.9	85.9
87.5°	39.7	35.9
90°	7.3	7.3
92.5°	29.1	23.3
95°	101.5	83.9
97.5°	243.1	209.8
100°	350.4	310.7
102.5°	455.8	421.8
105°	590.3	571.9
107.5°	678.3	682.7
110°	711.9	731.0



TEST NUMBER: P936295
CATALOG NUMBER: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	714.9	744.1
115°	696.0	736.5
117.5°	655.8	700.8
120°	623.3	667.1
122.5°	591.8	634.9
125°	546.8	586.6
127.5°	506.3	539.9
130°	482.5	513.4
132.5°	460.9	488.6
135°	431.2	455.1
137.5°	407.4	427.0
140°	391.1	409.4
142.5°	377.6	393.3
145°	357.4	369.2
147.5°	341.7	351.6
150°	332.0	340.0
152.5°	323.6	329.6
155°	313.9	317.9
157.5°	306.4	309.1
160°	301.8	303.4
162.5°	298.8	300.3
165°	294.5	296.1
167.5°	291.5	292.1
170°	290.6	290.6
172.5°	288.3	287.7
175°	287.0	287.0
177.5°	285.7	285.1
180°	285.1	285.1



TEST NUMBER: P936295
 CATALOG NUMBER: SQ4-FB-025U-050D-B2750-1D-UNV-STD-W-8-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.20	5.24	5.03	6.10	7.18	17.38	18.42	18.22	19.28	20.36
	3H	4.92	5.86	5.77	6.73	7.83	19.24	20.17	20.08	21.04	22.15
	4H	5.23	6.11	6.09	6.99	8.10	19.89	20.77	20.75	21.65	22.77
	6H	5.49	6.30	6.36	7.19	8.32	20.33	21.15	21.20	22.03	23.16
	8H	5.56	6.34	6.44	7.24	8.37	20.45	21.23	21.34	22.14	23.27
	12H	5.58	6.33	6.47	7.22	8.38	20.53	21.27	21.42	22.17	23.32
4H	2H	11.44	12.33	12.31	13.20	14.32	17.68	18.56	18.54	19.44	20.55
	3H	13.02	13.77	13.90	14.68	15.81	19.74	20.48	20.62	21.39	22.52
	4H	13.13	13.80	14.02	14.71	15.87	20.51	21.19	21.41	22.10	23.25
	6H	13.15	13.74	14.05	14.67	15.82	21.06	21.65	21.97	22.58	23.74
	8H	13.13	13.68	14.04	14.60	15.78	21.23	21.78	22.14	22.71	23.88
	12H	13.10	13.59	14.02	14.53	15.71	21.33	21.83	22.26	22.77	23.95
8H	4H	14.59	15.14	15.50	16.06	17.23	20.59	21.14	21.50	22.06	23.24
	6H	14.84	15.29	15.77	16.26	17.43	21.23	21.68	22.16	22.65	23.82
	8H	14.86	15.26	15.80	16.22	17.41	21.45	21.85	22.40	22.81	24.00
	12H	14.84	15.19	15.78	16.14	17.38	21.60	21.96	22.55	22.91	24.15
12H	4H	14.74	15.24	15.67	16.18	17.36	20.55	21.05	21.48	21.99	23.17
	6H	15.10	15.50	16.04	16.46	17.65	21.21	21.62	22.16	22.58	23.76
	8H	15.18	15.53	16.13	16.48	17.72	21.45	21.81	22.40	22.76	24.00