

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936580

Luminaire Tested: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936580  
REPORT IS A COMBINATION OF REPORTS P933432 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 14437.7 lumens  
Efficiency: N/A  
Efficacy: 97.0 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 148.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936580  
CATALOG NUMBER: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K

### Luminous Intensity Polar Plot

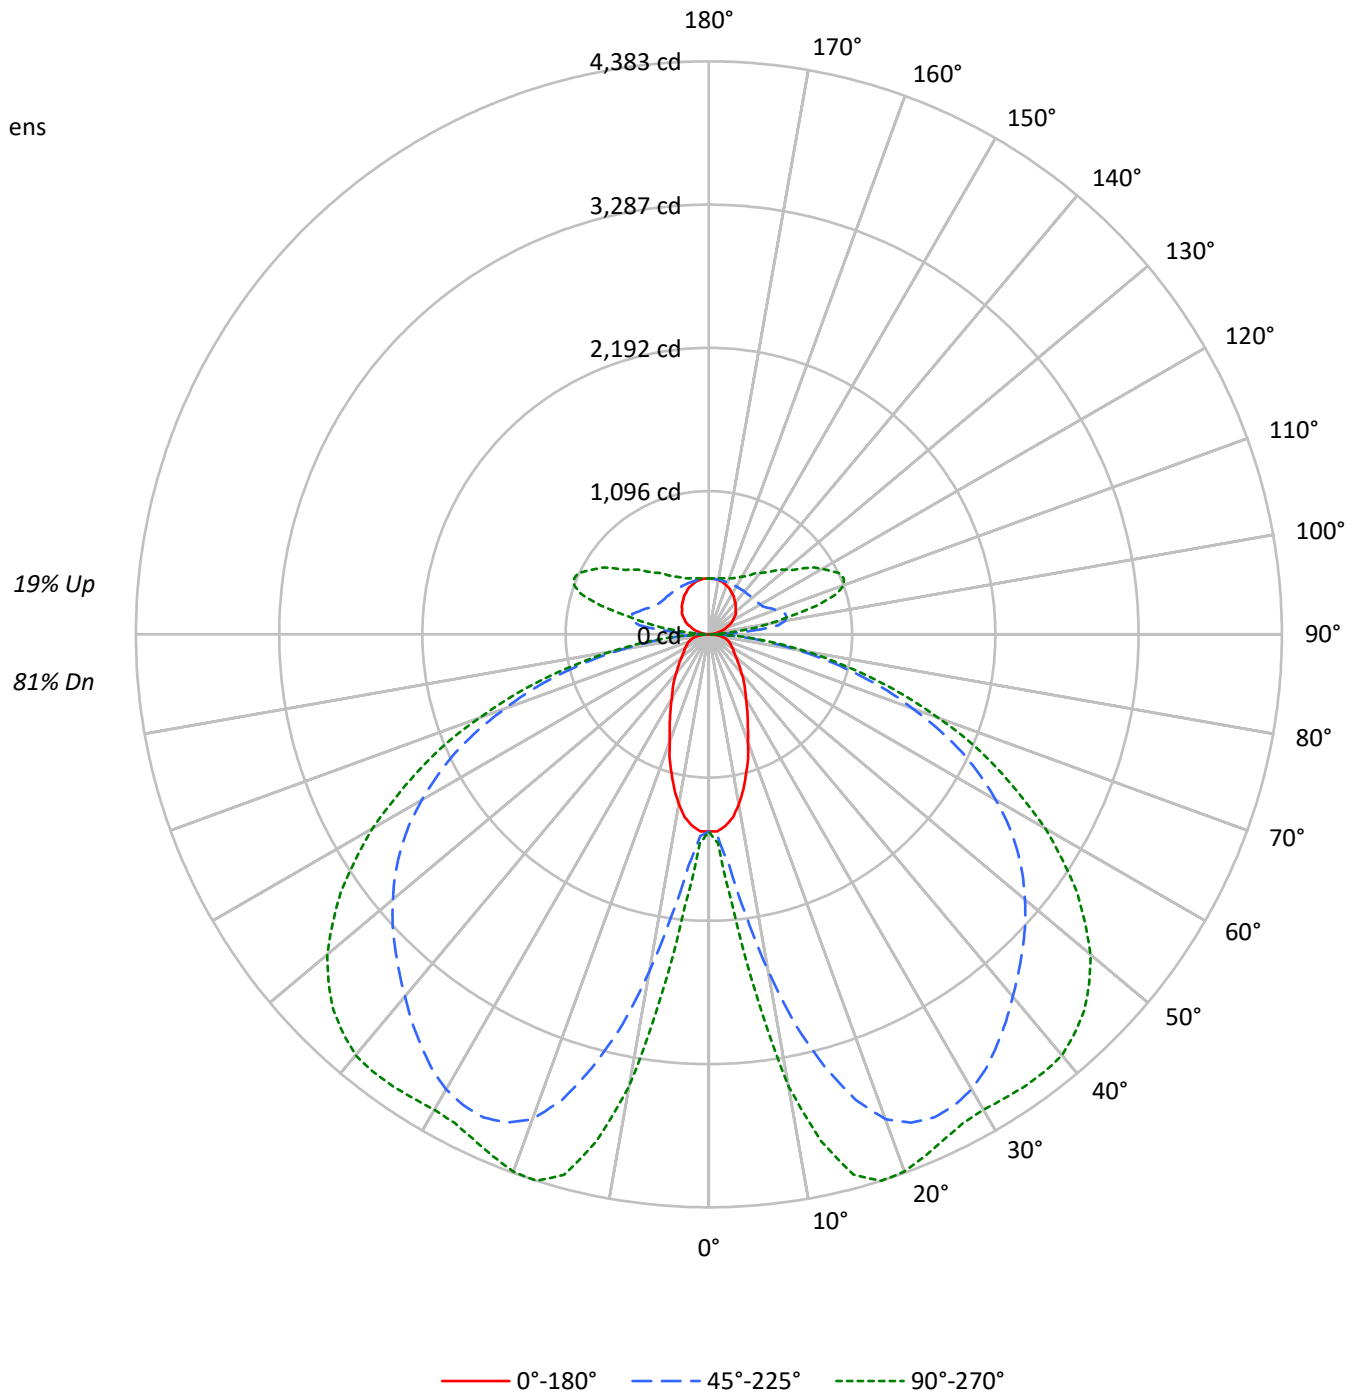



TEST NUMBER: P936580

CATALOG NUMBER: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	114	114	114	114	110	110	110	110	100	100	100	92	92	92	84	84	84	84	84	84	81
1	104	99	94	90	99	95	91	87	87	84	81	80	77	75	73	71	70	70	70	70	66
2	94	85	78	72	89	82	75	70	75	70	66	69	65	61	63	60	57	57	57	57	54
3	85	74	66	59	81	71	64	58	65	59	54	60	55	51	55	51	48	48	48	48	45
4	77	65	56	49	74	63	54	48	58	51	45	53	47	43	49	44	40	40	40	40	37
5	71	58	49	42	67	55	47	41	51	44	39	47	41	36	43	38	34	34	34	34	32
6	65	51	42	36	62	49	41	35	46	39	33	42	36	31	39	34	30	30	30	30	27
7	60	46	37	31	57	45	36	30	41	34	29	38	32	27	35	30	26	26	26	26	24
8	55	42	33	27	53	40	32	27	37	30	25	35	29	24	32	27	23	23	23	23	21
9	52	38	30	24	49	37	29	24	34	27	23	32	26	22	29	24	20	20	20	20	18
10	48	35	27	22	46	34	26	21	31	25	20	29	23	19	27	22	18	18	18	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4664	4664	4664
5°	4558	5392	6269
10°	4136	7861	10393
15°	3516	10273	12549
20°	2864	11908	12789
25°	2390	12464	12529
30°	2016	12546	12506
35°	1784	12341	12829
40°	1555	12074	13163
45°	1409	11879	13215
50°	1294	11704	12996
55°	1240	11448	12420
60°	1271	10950	11511
65°	1324	10191	10261
70°	1415	8893	8668
75°	1573	7258	6765
80°	1731	5039	4559
85°	1572	2678	2333

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 13215 cd/sqm



TEST NUMBER: P936580

CATALOG NUMBER: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	195.0	1.4
10°-20°	864.4	6.0
20°-30°	1512.0	10.5
30°-40°	1946.4	13.5
40°-50°	2174.1	15.1
50°-60°	2082.3	14.4
60°-70°	1650.2	11.4
70°-80°	970.4	6.7
80°-90°	271.2	1.9
90°-100°	208.4	1.4
100°-110°	547.9	3.8
110°-120°	568.1	3.9
120°-130°	455.7	3.2
130°-140°	357.6	2.5
140°-150°	274.5	1.9
150°-160°	197.7	1.4
160°-170°	120.9	0.8
170°-180°	40.9	0.3
0°-30°	2571.5	17.8
0°-40°	4517.9	31.3
0°-60°	8774.2	60.8
0°-90°	11666.0	80.8
90°-120°	1324.5	9.2
90°-150°	2412.2	16.7
90°-180°	2772.0	19.2
0°-180°	14437.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1508	1508	1508	1508	1508	
5°	1469	1576	1774	2007	2080	136
15°	1100	2031	3423	4150	4281	306
25°	703	2303	4077	4257	4262	324
35°	475	2201	3840	4058	4218	297
45°	325	1755	3394	3888	4063	251
55°	233	1115	2880	3345	3437	212
65°	184	592	2138	2405	2439	183
75°	136	364	1173	1290	1294	142
85°	48	112	291	320	325	51
90°	3	8	22	11	11	6
95°	28	108	359	185	126	31
105°	99	150	606	920	858	105
115°	175	213	485	968	1105	173
125°	244	274	441	746	880	217
135°	291	320	428	602	683	225
145°	337	359	422	514	554	211
155°	381	392	422	464	477	175
165°	411	417	422	439	444	116
175°	428	428	425	430	430	41
180°	428	428	428	428	428	



TEST NUMBER: P936580  
 CATALOG NUMBER: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1507.8	1507.8	1507.8	1507.8	1507.8	1507.8	1507.8	1507.8	1507.8	1507.8	1507.8
2.5°	1507.8	1507.8	1517.5	1522.4	1532.0	1536.9	1546.6	1556.3	1585.4	1590.3	1599.9
5°	1469.0	1488.4	1551.4	1575.7	1643.6	1735.7	1774.5	1837.5	1968.4	2007.2	2031.4
7.5°	1410.8	1454.5	1609.7	1648.4	1818.1	2060.5	2162.3	2298.1	2506.6	2608.4	2690.8
10°	1318.8	1410.8	1687.2	1779.3	2055.6	2424.1	2613.2	2802.3	3117.4	3258.0	3311.4
12.5°	1217.0	1367.2	1769.6	1895.7	2293.2	2831.4	3059.2	3267.7	3626.5	3815.6	3844.6
15°	1100.5	1304.1	1847.2	2031.4	2545.4	3170.8	3422.8	3679.8	4014.3	4150.1	4184.0
17.5°	998.7	1255.7	1919.9	2113.8	2739.2	3476.2	3733.2	3946.4	4217.9	4310.1	4334.4
20°	872.7	1178.1	1968.4	2220.5	2942.9	3699.2	3946.4	4111.3	4295.6	4353.7	4363.4
22.5°	780.5	1095.7	1997.5	2259.2	3078.6	3835.0	4043.5	4174.3	4300.4	4319.8	4324.6
25°	703.0	1003.6	1992.6	2302.9	3195.0	3917.4	4077.4	4174.3	4247.1	4256.7	4256.7
27.5°	630.3	901.8	1973.2	2312.6	3282.2	3936.8	4062.9	4130.7	4164.7	4184.0	4184.0
30°	567.3	804.8	1924.7	2293.2	3321.0	3917.4	4019.2	4053.1	4087.1	4116.1	4130.7
32.5°	518.8	712.7	1852.0	2254.5	3325.9	3868.9	3941.7	3961.1	4009.5	4077.4	4101.6
35°	475.1	620.6	1769.6	2201.1	3296.9	3791.4	3839.8	3859.3	3956.2	4058.0	4091.9
37.5°	431.5	552.7	1662.9	2109.0	3253.2	3699.2	3733.2	3767.1	3917.4	4038.6	4077.4
40°	387.8	494.5	1536.9	2007.2	3185.3	3587.7	3616.8	3670.2	3868.9	4009.5	4048.2
42.5°	353.9	446.1	1401.2	1900.5	3098.0	3461.7	3505.3	3582.9	3810.7	3961.1	4004.7
45°	324.8	397.6	1255.7	1755.1	2986.5	3330.8	3393.8	3500.5	3742.8	3888.3	3927.1
47.5°	295.8	363.7	1105.4	1604.8	2865.3	3199.8	3282.2	3403.4	3650.8	3791.4	3825.3
50°	271.5	329.7	955.1	1444.8	2734.5	3059.2	3156.2	3282.2	3534.4	3665.3	3708.9
52.5°	252.1	300.6	814.5	1284.8	2584.1	2913.8	3025.3	3156.2	3393.8	3519.8	3548.9
55°	232.7	276.4	693.3	1115.1	2428.9	2758.6	2879.9	3006.0	3238.6	3345.3	3364.7
57.5°	223.0	257.0	591.5	955.1	2264.1	2584.1	2719.8	2836.3	3054.4	3136.8	3156.2
60°	208.5	242.4	513.9	819.4	2084.8	2419.3	2535.6	2652.0	2836.3	2904.1	2918.7
62.5°	194.0	232.7	455.7	688.5	1900.5	2225.3	2341.7	2448.3	2603.5	2652.0	2671.4
65°	184.2	223.0	412.1	591.5	1711.5	2021.7	2138.1	2230.2	2356.3	2404.7	2414.4
67.5°	174.6	213.3	378.2	509.1	1522.4	1818.1	1905.3	1992.6	2089.6	2138.1	2142.9
70°	160.0	203.6	349.1	450.9	1328.4	1585.4	1658.1	1750.2	1827.8	1852.0	1866.5
72.5°	150.3	189.1	329.7	407.2	1129.7	1362.4	1430.2	1483.6	1551.4	1575.7	1575.7
75°	135.7	169.7	310.3	363.7	926.0	1115.1	1173.3	1226.6	1279.9	1289.6	1275.1
77.5°	121.2	150.3	266.6	305.4	722.4	882.4	930.8	960.0	1003.6	1013.3	1018.1
80°	101.8	130.9	208.5	237.6	523.6	649.7	683.6	707.8	746.6	746.6	756.4
82.5°	77.5	101.8	150.3	169.7	353.9	446.1	475.1	489.6	513.9	513.9	513.9
85°	48.5	63.0	96.9	111.5	213.3	271.5	290.9	295.8	315.2	320.0	320.0
87.5°	24.3	33.9	63.0	67.9	111.5	140.6	140.6	150.3	150.3	145.4	140.6
90°	2.9	5.2	7.4	8.0	12.6	18.7	21.8	19.4	14.5	10.9	10.9
92.5°	11.5	30.9	50.5	55.4	77.8	107.8	122.8	107.6	77.3	54.5	52.3
95°	27.5	63.2	98.9	107.9	191.6	303.2	359.0	320.3	243.0	185.1	178.5
97.5°	47.7	79.2	110.7	118.5	258.0	444.2	537.2	512.7	463.9	427.3	414.8
100°	63.1	91.7	120.2	127.4	282.3	488.8	592.0	593.8	597.4	600.0	585.1
102.5°	76.3	102.9	129.6	136.3	293.4	502.8	607.5	638.6	700.8	747.5	734.7
105°	98.7	121.3	143.8	149.5	301.6	504.3	605.8	675.5	815.0	919.7	912.8
107.5°	121.7	142.7	163.8	169.0	303.1	481.9	571.3	668.6	863.2	1009.2	1010.9
110°	137.1	156.1	175.1	179.9	300.8	462.0	542.6	651.4	869.0	1032.2	1039.3



TEST NUMBER: P936580

CATALOG NUMBER: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	152.4	170.5	188.6	193.1	300.9	444.6	516.6	627.9	850.5	1017.6	1028.5
115°	175.3	192.1	208.8	213.0	303.7	424.7	485.2	592.5	807.0	967.9	983.1
117.5°	198.0	213.2	228.3	232.2	309.3	412.3	463.7	560.6	754.2	899.3	916.2
120°	211.2	225.5	239.8	243.3	313.9	408.0	455.1	543.5	720.5	853.1	869.5
122.5°	224.1	238.6	252.9	256.5	320.5	405.8	448.5	528.1	687.4	806.9	823.0
125°	243.9	257.1	270.3	273.5	329.5	404.1	441.3	508.9	644.2	745.8	760.7
127.5°	260.0	273.2	286.5	289.8	338.4	403.0	435.3	493.4	609.6	696.7	709.3
130°	268.5	282.9	297.2	300.7	344.9	403.6	433.0	484.8	588.2	665.7	677.4
132.5°	277.5	291.8	306.1	309.6	350.1	404.1	431.0	477.3	569.9	639.4	649.8
135°	290.7	303.7	316.7	319.9	355.8	403.7	427.6	466.3	543.9	602.0	611.0
137.5°	304.2	317.1	329.9	333.1	364.4	406.2	427.0	459.7	525.2	574.4	581.8
140°	315.3	327.2	339.1	342.1	369.7	406.5	425.0	453.2	509.9	552.4	559.2
142.5°	323.9	334.9	345.9	348.7	374.1	408.0	425.0	449.8	499.6	536.9	542.8
145°	337.2	346.8	356.3	358.7	379.8	408.0	422.1	442.5	483.1	513.6	518.1
147.5°	350.4	359.7	369.0	371.3	388.2	410.8	422.1	438.2	470.1	494.1	497.8
150°	359.0	367.4	375.8	377.9	392.6	412.3	422.1	435.7	462.7	482.9	485.9
152.5°	367.9	374.3	380.6	382.2	395.5	413.2	422.1	433.7	456.8	474.1	476.4
155°	381.0	385.7	390.5	391.6	401.8	415.3	422.1	431.3	449.7	463.5	465.0
157.5°	390.8	395.4	400.0	401.2	408.2	417.4	422.1	429.3	443.5	454.2	455.2
160°	397.5	401.0	404.6	405.5	411.0	418.4	422.1	428.2	440.4	449.6	450.2
162.5°	404.1	406.7	409.4	410.1	414.1	419.4	422.1	427.3	437.6	445.3	445.9
165°	411.2	413.6	416.1	416.7	418.5	420.9	422.1	425.8	433.2	438.7	439.3
167.5°	417.8	419.0	420.1	420.4	421.9	423.9	425.0	427.4	432.2	435.9	436.1
170°	422.1	423.3	424.4	424.7	424.8	424.9	425.0	427.4	432.2	435.9	435.9
172.5°	424.4	424.7	424.9	425.0	425.0	425.0	425.0	426.9	430.7	433.6	433.4
175°	427.6	427.6	427.6	427.6	426.7	425.5	425.0	426.2	428.6	430.4	430.4
177.5°	427.6	427.6	427.6	427.6	426.9	426.0	425.5	426.5	428.4	429.8	429.6
180°	427.6	427.6	427.6	427.6	427.6	427.6	427.6	427.6	427.6	427.6	427.6



TEST NUMBER: P936580

CATALOG NUMBER: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	1507.8	1507.8
2.5°	1609.7	1599.9
5°	2070.2	2079.9
7.5°	2787.7	2782.9
10°	3466.5	3510.1
12.5°	3961.1	3970.7
15°	4261.6	4281.0
17.5°	4378.0	4382.8
20°	4382.8	4373.1
22.5°	4329.5	4319.8
25°	4266.5	4261.6
27.5°	4208.3	4213.2
30°	4184.0	4198.6
32.5°	4184.0	4208.3
35°	4193.7	4217.9
37.5°	4188.9	4217.9
40°	4169.5	4203.4
42.5°	4116.1	4140.4
45°	4033.7	4062.9
47.5°	3927.1	3946.4
50°	3791.4	3810.7
52.5°	3621.6	3626.5
55°	3418.0	3437.4
57.5°	3199.8	3204.7
60°	2957.4	2972.0
62.5°	2700.5	2700.5
65°	2428.9	2438.7
67.5°	2147.8	2172.1
70°	1861.8	1866.5
72.5°	1580.5	1580.5
75°	1289.6	1294.5
77.5°	1013.3	1013.3
80°	751.5	756.4
82.5°	518.8	528.5
85°	324.8	324.8
87.5°	150.3	135.7
90°	10.9	10.9
92.5°	43.7	35.0
95°	152.2	126.0
97.5°	364.8	314.8
100°	525.6	466.0
102.5°	683.7	632.7
105°	885.4	858.0
107.5°	1017.6	1024.1
110°	1067.9	1096.4





TEST NUMBER: P936580

CATALOG NUMBER: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	1072.4	1116.2
115°	1043.9	1104.7
117.5°	983.6	1051.1
120°	935.0	1000.6
122.5°	887.8	952.4
125°	820.2	879.7
127.5°	759.5	809.7
130°	723.8	770.2
132.5°	691.3	732.9
135°	646.8	682.6
137.5°	611.1	640.5
140°	586.7	614.1
142.5°	566.4	590.0
145°	535.9	553.8
147.5°	512.6	527.4
150°	497.9	509.9
152.5°	485.3	494.4
155°	470.9	476.9
157.5°	459.5	463.7
160°	452.7	455.1
162.5°	448.2	450.5
165°	441.8	444.2
167.5°	437.1	438.2
170°	435.9	435.9
172.5°	432.4	431.6
175°	430.4	430.4
177.5°	428.6	427.6
180°	427.6	427.6



TEST NUMBER: P936580  
 CATALOG NUMBER: SQ4-FB-025U-125D-B2750-1D-UNV-STD-W-12-4000K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.78	10.09	9.42	10.74	11.49	21.98	23.28	22.61	23.93	24.68
	3H	9.52	10.70	10.17	11.36	12.14	23.85	25.03	24.50	25.69	26.47
	4H	9.84	10.95	10.50	11.62	12.42	24.52	25.63	25.18	26.31	27.10
	6H	10.11	11.14	10.79	11.82	12.64	24.98	26.01	25.66	26.69	27.50
	8H	10.19	11.18	10.88	11.88	12.69	25.11	26.10	25.80	26.80	27.62
	12H	10.22	11.17	10.92	11.86	12.71	25.20	26.14	25.90	26.84	27.68
4H	2H	16.06	17.17	16.73	17.84	18.64	22.30	23.41	22.97	24.09	24.88
	3H	17.66	18.60	18.35	19.31	20.12	24.39	25.33	25.07	26.04	26.85
	4H	17.78	18.63	18.48	19.34	20.19	25.18	26.03	25.88	26.75	27.59
	6H	17.81	18.56	18.53	19.30	20.15	25.75	26.49	26.47	27.23	28.08
	8H	17.80	18.50	18.52	19.23	20.10	25.93	26.62	26.65	27.36	28.22
	12H	17.78	18.41	18.53	19.17	20.04	26.04	26.67	26.79	27.43	28.30
8H	4H	19.26	19.96	19.99	20.69	21.56	25.28	25.97	26.00	26.71	27.57
	6H	19.53	20.11	20.28	20.88	21.75	25.93	26.51	26.68	27.29	28.16
	8H	19.55	20.07	20.32	20.85	21.73	26.16	26.68	26.93	27.46	28.34
	12H	19.54	20.00	20.31	20.77	21.71	26.33	26.79	27.10	27.56	28.50
12H	4H	19.43	20.06	20.17	20.82	21.69	25.25	25.88	26.00	26.64	27.51
	6H	19.79	20.31	20.56	21.09	21.97	25.92	26.44	26.69	27.22	28.10
	8H	19.88	20.34	20.65	21.11	22.05	26.18	26.63	26.94	27.40	28.34