

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937090

Luminaire Tested: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937090
REPORT IS A COMBINATION OF REPORTS P933509 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6602.8 lumens
Efficiency: N/A
Efficacy: 128.0 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 51.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937090
CATALOG NUMBER: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K

Luminous Intensity Polar Plot

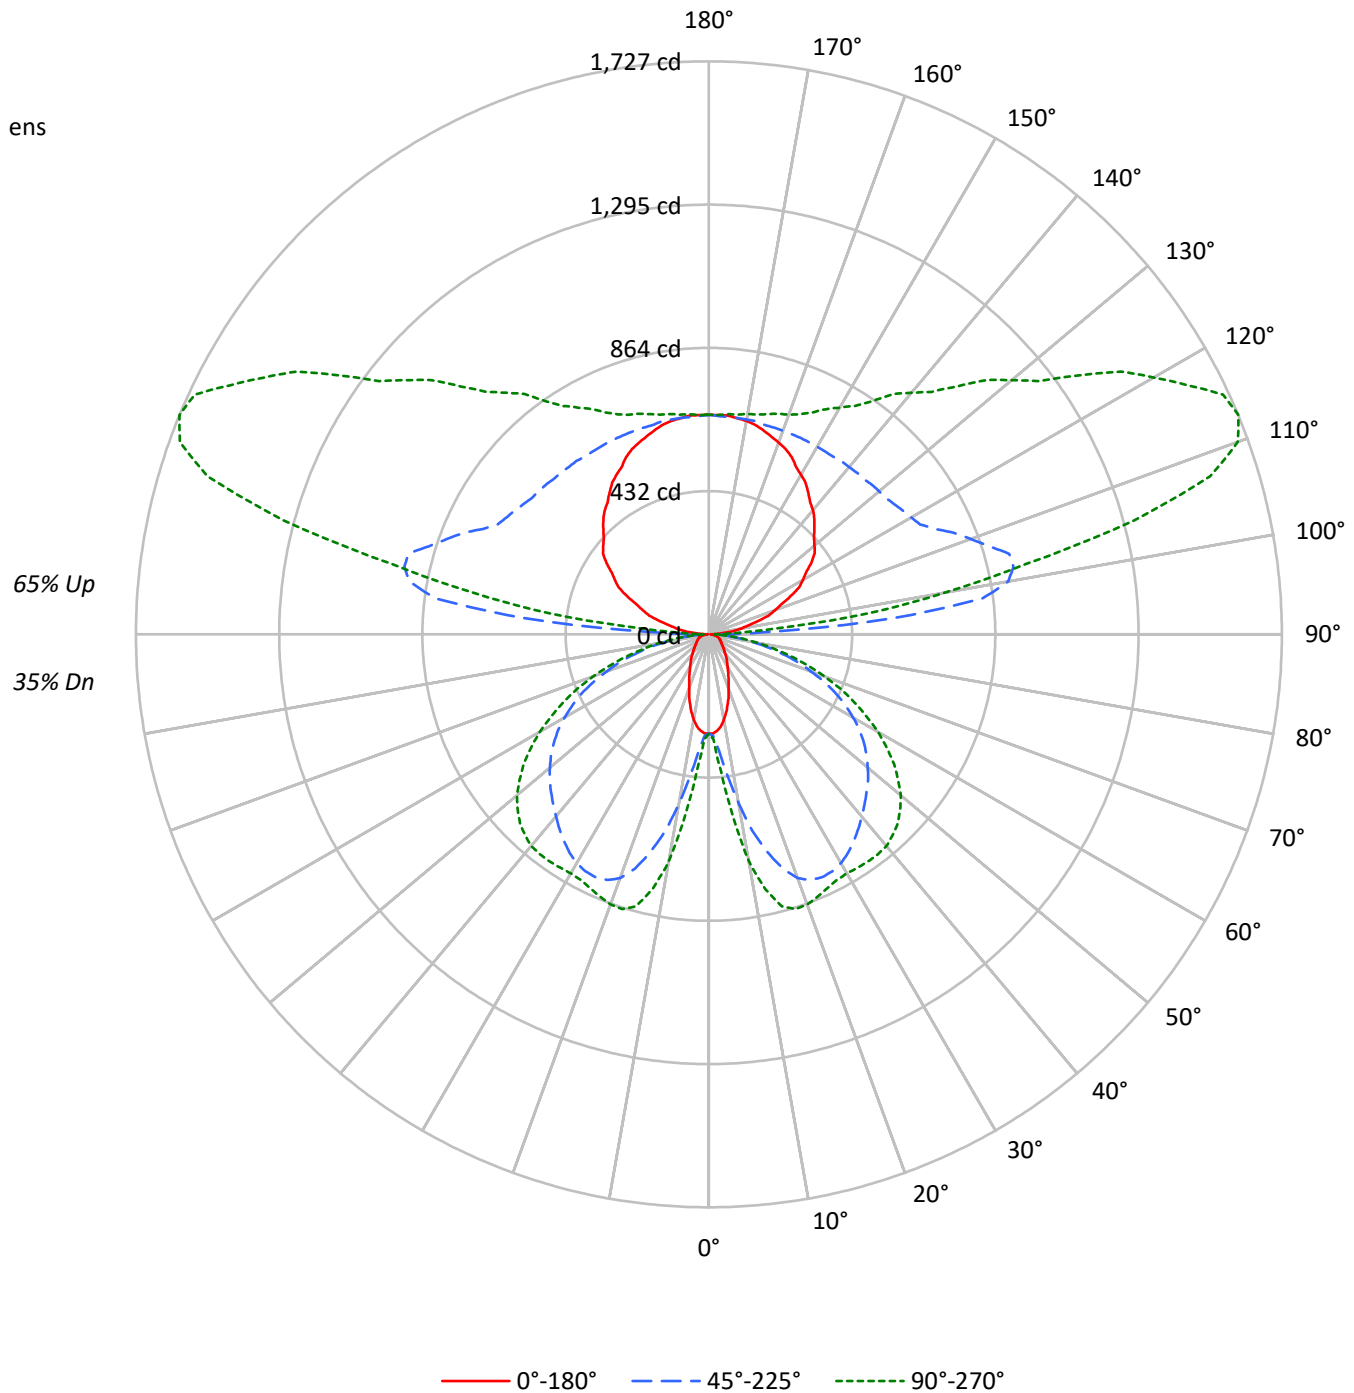



TEST NUMBER: P937090

CATALOG NUMBER: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	42	42	42	35		
1	94	90	86	82	85	81	78	75	65	63	61	50	49	47	37	36	35	29		
2	85	78	72	66	77	70	65	61	57	53	50	44	41	39	32	30	29	23		
3	77	68	61	55	70	62	55	50	49	45	41	38	35	32	28	26	24	19		
4	71	60	52	46	63	54	47	42	44	39	35	34	30	27	25	22	20	16		
5	65	53	45	39	58	48	41	36	39	33	29	30	26	23	22	19	17	14		
6	59	47	39	33	53	43	36	31	35	29	25	27	23	20	20	17	15	12		
7	55	42	34	29	49	38	31	26	31	26	22	24	20	17	18	15	13	10		
8	50	38	30	25	45	35	28	23	28	23	19	22	18	15	16	14	12	9		
9	47	35	27	22	42	32	25	20	26	21	17	20	16	14	15	12	10	8		
10	44	32	24	20	39	29	22	18	23	18	15	18	15	12	14	11	9	7		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1848	1848	1848
5°	1805	2135	2484
10°	1637	3112	4118
15°	1390	4064	4973
20°	1132	4710	5068
25°	943	4927	4965
30°	795	4957	4956
35°	703	4873	5084
40°	612	4765	5217
45°	554	4685	5237
50°	508	4613	5150
55°	486	4508	4922
60°	498	4308	4562
65°	516	4005	4065
70°	548	3490	3436
75°	605	2843	2681
80°	657	1969	1806
85°	572	1044	925

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 5237 cd/sqm



TEST NUMBER: P937090

CATALOG NUMBER: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.6	0.6
10°-20°	171.3	2.6
20°-30°	299.6	4.5
30°-40°	385.6	5.8
40°-50°	430.7	6.5
50°-60°	412.6	6.2
60°-70°	327.0	5.0
70°-80°	192.3	2.9
80°-90°	55.9	0.8
90°-100°	322.5	4.9
100°-110°	847.9	12.8
110°-120°	879.2	13.3
120°-130°	705.2	10.7
130°-140°	553.4	8.4
140°-150°	424.7	6.4
150°-160°	305.9	4.6
160°-170°	187.1	2.8
170°-180°	63.2	1.0
0°-30°	509.5	7.7
0°-40°	895.1	13.6
0°-60°	1738.5	26.3
0°-90°	2313.6	35.0
90°-120°	2049.7	31.0
90°-150°	3733.0	56.5
90°-180°	4289.0	65.0
0°-180°	6602.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	299	299	299	299	299	
5°	291	312	352	398	412	27
15°	218	402	678	822	848	61
25°	139	456	808	843	844	64
35°	94	436	761	804	836	59
45°	64	348	672	770	805	50
55°	46	221	571	663	681	42
65°	36	117	424	476	483	36
75°	27	72	232	256	256	28
85°	10	22	58	63	64	10
90°	4	12	34	17	17	4
95°	43	167	556	286	195	47
105°	153	231	937	1423	1328	162
115°	271	330	751	1498	1710	268
125°	377	423	683	1154	1362	335
135°	450	495	662	932	1056	348
145°	522	555	653	795	857	327
155°	590	606	653	717	738	271
165°	636	645	653	679	687	180
175°	662	662	658	666	666	63
180°	662	662	662	662	662	



TEST NUMBER: P937090

CATALOG NUMBER: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	298.7	298.7	298.7	298.7	298.7	298.7	298.7	298.7	298.7	298.7	298.7
2.5°	298.7	298.7	300.6	301.6	303.6	304.5	306.5	308.4	314.1	315.1	317.0
5°	291.1	294.9	307.4	312.2	325.7	343.9	351.5	364.0	390.0	397.7	402.5
7.5°	279.5	288.2	318.9	326.6	360.2	408.3	428.4	455.3	496.6	516.8	533.2
10°	261.3	279.5	334.2	352.6	407.3	480.3	517.8	555.2	617.7	645.5	656.1
12.5°	241.1	270.9	350.6	375.6	454.4	561.0	606.1	647.5	718.5	756.0	761.7
15°	218.0	258.4	366.0	402.5	504.3	628.2	678.1	729.1	795.4	822.3	829.0
17.5°	197.9	248.8	380.4	418.9	542.7	688.7	739.6	782.0	835.7	854.0	858.7
20°	173.0	233.4	390.0	440.0	583.1	733.0	782.0	814.6	851.1	862.7	864.6
22.5°	154.6	217.1	395.8	447.6	610.0	759.8	801.1	827.0	852.1	855.9	856.8
25°	139.3	198.8	394.8	456.3	633.1	776.1	807.8	827.0	841.5	843.4	843.4
27.5°	124.9	178.7	391.0	458.2	650.4	780.0	805.0	818.4	825.1	829.0	829.0
30°	112.4	159.5	381.3	454.4	658.0	776.1	796.4	803.1	809.7	815.6	818.4
32.5°	102.8	141.2	366.9	446.7	658.9	766.6	781.0	784.8	794.4	807.8	812.7
35°	94.2	123.0	350.6	436.1	653.2	751.2	760.8	764.7	783.9	804.0	810.7
37.5°	85.5	109.5	329.5	417.9	644.5	733.0	739.6	746.4	776.1	800.2	807.8
40°	76.9	98.0	304.5	397.7	631.2	710.8	716.6	727.1	766.6	794.4	802.1
42.5°	70.1	88.3	277.6	376.6	613.8	685.9	694.5	709.9	755.0	784.8	793.4
45°	64.4	78.8	248.8	347.7	591.7	659.9	672.4	693.5	741.6	770.4	778.0
47.5°	58.6	72.0	219.0	317.9	567.7	634.0	650.4	674.3	723.3	751.2	757.9
50°	53.8	65.3	189.3	286.2	541.8	606.1	625.3	650.4	700.3	726.2	734.9
52.5°	49.9	59.6	161.4	254.6	512.0	577.3	599.5	625.3	672.4	697.4	703.2
55°	46.1	54.7	137.3	220.9	481.2	546.5	570.6	595.5	641.7	662.8	666.7
57.5°	44.2	50.9	117.2	189.3	448.6	512.0	538.9	561.9	605.2	621.5	625.3
60°	41.4	48.0	101.8	162.4	413.0	479.3	502.4	525.4	561.9	575.4	578.3
62.5°	38.4	46.1	90.3	136.4	376.6	440.9	463.9	485.1	515.8	525.4	529.3
65°	36.5	44.2	81.7	117.2	339.1	400.5	423.6	441.9	466.8	476.4	478.4
67.5°	34.6	42.3	75.0	100.8	301.6	360.2	377.5	394.8	414.0	423.6	424.6
70°	31.7	40.3	69.1	89.3	263.2	314.1	328.5	346.8	362.1	366.9	369.9
72.5°	29.8	37.4	65.3	80.7	223.9	269.9	283.3	293.9	307.4	312.2	312.2
75°	26.9	33.6	61.5	72.0	183.5	220.9	232.4	243.0	253.6	255.6	252.6
77.5°	24.0	29.8	52.8	60.5	143.2	174.9	184.4	190.2	198.8	200.7	201.7
80°	20.2	26.0	41.4	47.1	103.7	128.7	135.4	140.3	147.9	147.9	149.8
82.5°	15.4	20.2	29.8	33.6	70.1	88.3	94.2	97.0	101.8	101.8	101.8
85°	9.6	12.5	19.2	22.1	42.3	53.8	57.7	58.6	62.5	63.4	63.4
87.5°	4.8	6.7	12.5	13.5	22.1	27.9	27.9	29.8	29.8	28.8	27.9
90°	4.4	7.9	11.6	12.4	19.5	28.9	33.7	30.0	22.5	16.9	16.9
92.5°	17.8	47.9	78.1	85.7	120.4	166.8	190.0	166.6	119.6	84.3	81.0
95°	42.6	97.9	153.1	166.9	296.4	469.2	555.5	495.7	376.1	286.4	276.3
97.5°	73.7	122.4	171.1	183.4	399.4	687.3	831.3	793.5	718.0	661.2	641.9
100°	97.7	141.9	186.1	197.2	436.8	756.4	916.1	918.9	924.4	928.5	905.5
102.5°	118.1	159.4	200.6	211.0	454.0	778.0	940.1	988.2	1084.6	1156.8	1137.0
105°	152.8	187.8	222.7	231.4	466.7	780.5	937.4	1045.3	1261.3	1423.2	1412.6
107.5°	188.3	220.9	253.5	261.6	469.1	745.8	884.1	1034.7	1335.9	1561.8	1564.4
110°	212.3	241.7	271.0	278.4	465.5	715.0	839.7	1008.1	1344.8	1597.3	1608.4



TEST NUMBER: P937090

CATALOG NUMBER: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	235.8	263.8	291.8	298.8	465.7	688.1	799.3	971.6	1316.2	1574.6	1591.6
115°	271.3	297.2	323.0	329.5	470.0	657.2	750.9	916.9	1248.9	1497.8	1521.3
117.5°	306.4	329.9	353.3	359.3	478.7	637.9	717.6	867.4	1167.0	1391.7	1417.8
120°	326.8	349.0	371.0	376.6	485.8	631.4	704.3	841.2	1114.9	1320.2	1345.6
122.5°	346.9	369.1	391.5	397.0	496.0	628.1	694.1	817.3	1063.8	1248.7	1273.7
125°	377.4	397.8	418.1	423.2	509.8	625.2	683.0	787.7	997.1	1154.1	1177.1
127.5°	402.3	422.9	443.3	448.5	523.5	623.6	673.7	763.5	943.3	1078.2	1097.7
130°	415.6	437.8	459.8	465.4	533.7	624.7	670.1	750.2	910.2	1030.3	1048.2
132.5°	429.4	451.5	473.6	479.1	541.8	625.2	667.0	738.6	881.9	989.4	1005.4
135°	449.8	470.0	490.1	495.2	550.7	624.7	661.6	721.6	841.6	931.6	945.4
137.5°	470.7	490.6	510.5	515.5	563.9	628.5	660.8	711.5	812.9	889.0	900.4
140°	488.0	506.3	524.8	529.4	572.1	629.2	657.6	701.4	789.1	854.8	865.4
142.5°	501.4	518.4	535.4	539.6	578.9	631.4	657.6	696.1	773.1	830.8	840.0
145°	521.8	536.6	551.3	555.0	587.8	631.4	653.2	684.7	747.7	794.8	801.7
147.5°	542.2	556.6	571.0	574.6	600.8	635.7	653.2	678.0	727.5	764.7	770.4
150°	555.5	568.5	581.6	584.8	607.7	638.0	653.2	674.1	716.0	747.4	752.1
152.5°	569.3	579.2	589.0	591.5	612.1	639.5	653.2	671.1	706.8	733.6	737.2
155°	589.7	597.0	604.3	606.1	621.8	642.7	653.2	667.4	695.9	717.2	719.5
157.5°	604.8	612.0	619.0	620.8	631.6	646.1	653.2	664.3	686.4	703.0	704.6
160°	615.0	620.6	626.1	627.4	636.0	647.5	653.2	662.7	681.6	695.8	696.8
162.5°	625.2	629.4	633.5	634.6	640.8	649.1	653.2	661.2	677.2	689.2	690.1
165°	636.3	640.1	643.9	644.8	647.6	651.3	653.2	658.9	670.4	679.0	680.0
167.5°	646.5	648.3	650.1	650.5	652.9	656.1	657.6	661.3	668.9	674.5	674.9
170°	653.2	655.0	656.8	657.2	657.3	657.5	657.6	661.3	668.9	674.5	674.5
172.5°	656.8	657.1	657.5	657.6	657.6	657.6	657.6	660.6	666.5	671.0	670.6
175°	661.6	661.6	661.6	661.6	660.3	658.5	657.6	659.5	663.2	666.1	666.1
177.5°	661.6	661.6	661.6	661.6	660.6	659.2	658.6	660.1	663.1	665.3	664.9
180°	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6	661.6



TEST NUMBER: P937090

CATALOG NUMBER: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	298.7	298.7
2.5°	318.9	317.0
5°	410.2	412.1
7.5°	552.4	551.4
10°	686.8	695.4
12.5°	784.8	786.7
15°	844.4	848.2
17.5°	867.4	868.4
20°	868.4	866.5
22.5°	857.8	855.9
25°	845.4	844.4
27.5°	833.8	834.8
30°	829.0	831.9
32.5°	829.0	833.8
35°	830.9	835.7
37.5°	830.0	835.7
40°	826.1	832.9
42.5°	815.6	820.3
45°	799.2	805.0
47.5°	778.0	782.0
50°	751.2	755.0
52.5°	717.6	718.5
55°	677.2	681.1
57.5°	634.0	635.0
60°	586.0	588.9
62.5°	535.1	535.1
65°	481.2	483.1
67.5°	425.5	430.3
70°	368.9	369.9
72.5°	313.1	313.1
75°	255.6	256.5
77.5°	200.7	200.7
80°	148.9	149.8
82.5°	102.8	104.7
85°	64.4	64.4
87.5°	29.8	26.9
90°	16.9	16.9
92.5°	67.5	54.1
95°	235.6	194.9
97.5°	564.5	487.1
100°	813.3	721.1
102.5°	1058.1	979.2
105°	1370.1	1327.7
107.5°	1574.6	1584.8
110°	1652.5	1696.7



TEST NUMBER: P937090

CATALOG NUMBER: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1659.5	1727.4
115°	1615.5	1709.6
117.5°	1522.2	1626.6
120°	1447.0	1548.4
122.5°	1373.8	1473.9
125°	1269.4	1361.5
127.5°	1175.4	1253.2
130°	1120.0	1191.8
132.5°	1069.8	1134.2
135°	1000.9	1056.4
137.5°	945.7	991.2
140°	907.9	950.3
142.5°	876.5	913.0
145°	829.4	857.0
147.5°	793.2	816.1
150°	770.6	789.1
152.5°	751.1	765.1
155°	728.8	738.0
157.5°	711.1	717.6
160°	700.5	704.3
162.5°	693.6	697.2
165°	683.7	687.4
167.5°	676.5	678.0
170°	674.5	674.5
172.5°	669.3	667.8
175°	666.1	666.1
177.5°	663.2	661.6
180°	661.6	661.6



TEST NUMBER: P937090

CATALOG NUMBER: SQ4-FB-075U-050D-B2750-1D-UNV-STD-W-6-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	1.58	2.35	2.65	3.42	4.89	14.75	15.51	15.82	16.59	18.06
	3H	2.28	2.97	3.36	4.05	5.54	16.58	17.26	17.65	18.35	19.83
	4H	2.58	3.23	3.66	4.31	5.80	17.21	17.87	18.30	18.95	20.44
	6H	2.82	3.42	3.92	4.51	6.01	17.63	18.23	18.73	19.32	20.83
	8H	2.89	3.46	3.99	4.56	6.06	17.75	18.32	18.85	19.43	20.92
	12H	2.90	3.45	4.01	4.54	6.07	17.81	18.36	18.92	19.45	20.98
4H	2H	8.78	9.43	9.87	10.52	12.01	15.01	15.66	16.11	16.75	18.24
	3H	10.34	10.88	11.44	12.00	13.50	17.04	17.59	18.15	18.70	20.21
	4H	10.43	10.93	11.54	12.03	13.56	17.80	18.30	18.91	19.41	20.93
	6H	10.43	10.86	11.55	11.99	13.51	18.33	18.76	19.45	19.89	21.40
	8H	10.41	10.81	11.52	11.93	13.46	18.49	18.89	19.60	20.01	21.54
	12H	10.36	10.73	11.49	11.85	13.39	18.57	18.94	19.71	20.07	21.61
8H	4H	11.86	12.26	12.98	13.38	14.92	17.85	18.26	18.97	19.37	20.91
	6H	12.10	12.43	13.24	13.59	15.12	18.47	18.81	19.61	19.97	21.50
	8H	12.12	12.41	13.26	13.55	15.10	18.69	18.98	19.83	20.12	21.67
	12H	12.08	12.34	13.23	13.47	15.06	18.83	19.08	19.98	20.22	21.81
12H	4H	12.00	12.36	13.13	13.49	15.03	17.80	18.17	18.94	19.30	20.84
	6H	12.36	12.65	13.50	13.79	15.34	18.46	18.75	19.60	19.89	21.44
	8H	12.42	12.68	13.57	13.81	15.40	18.68	18.94	19.83	20.07	21.66