

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938380

Luminaire Tested: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P938380
REPORT IS A COMBINATION OF REPORTS P933622 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 24163.4 lumens
Efficiency: N/A
Efficacy: 126.6 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 190.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P938380
CATALOG NUMBER: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K

Luminous Intensity Polar Plot

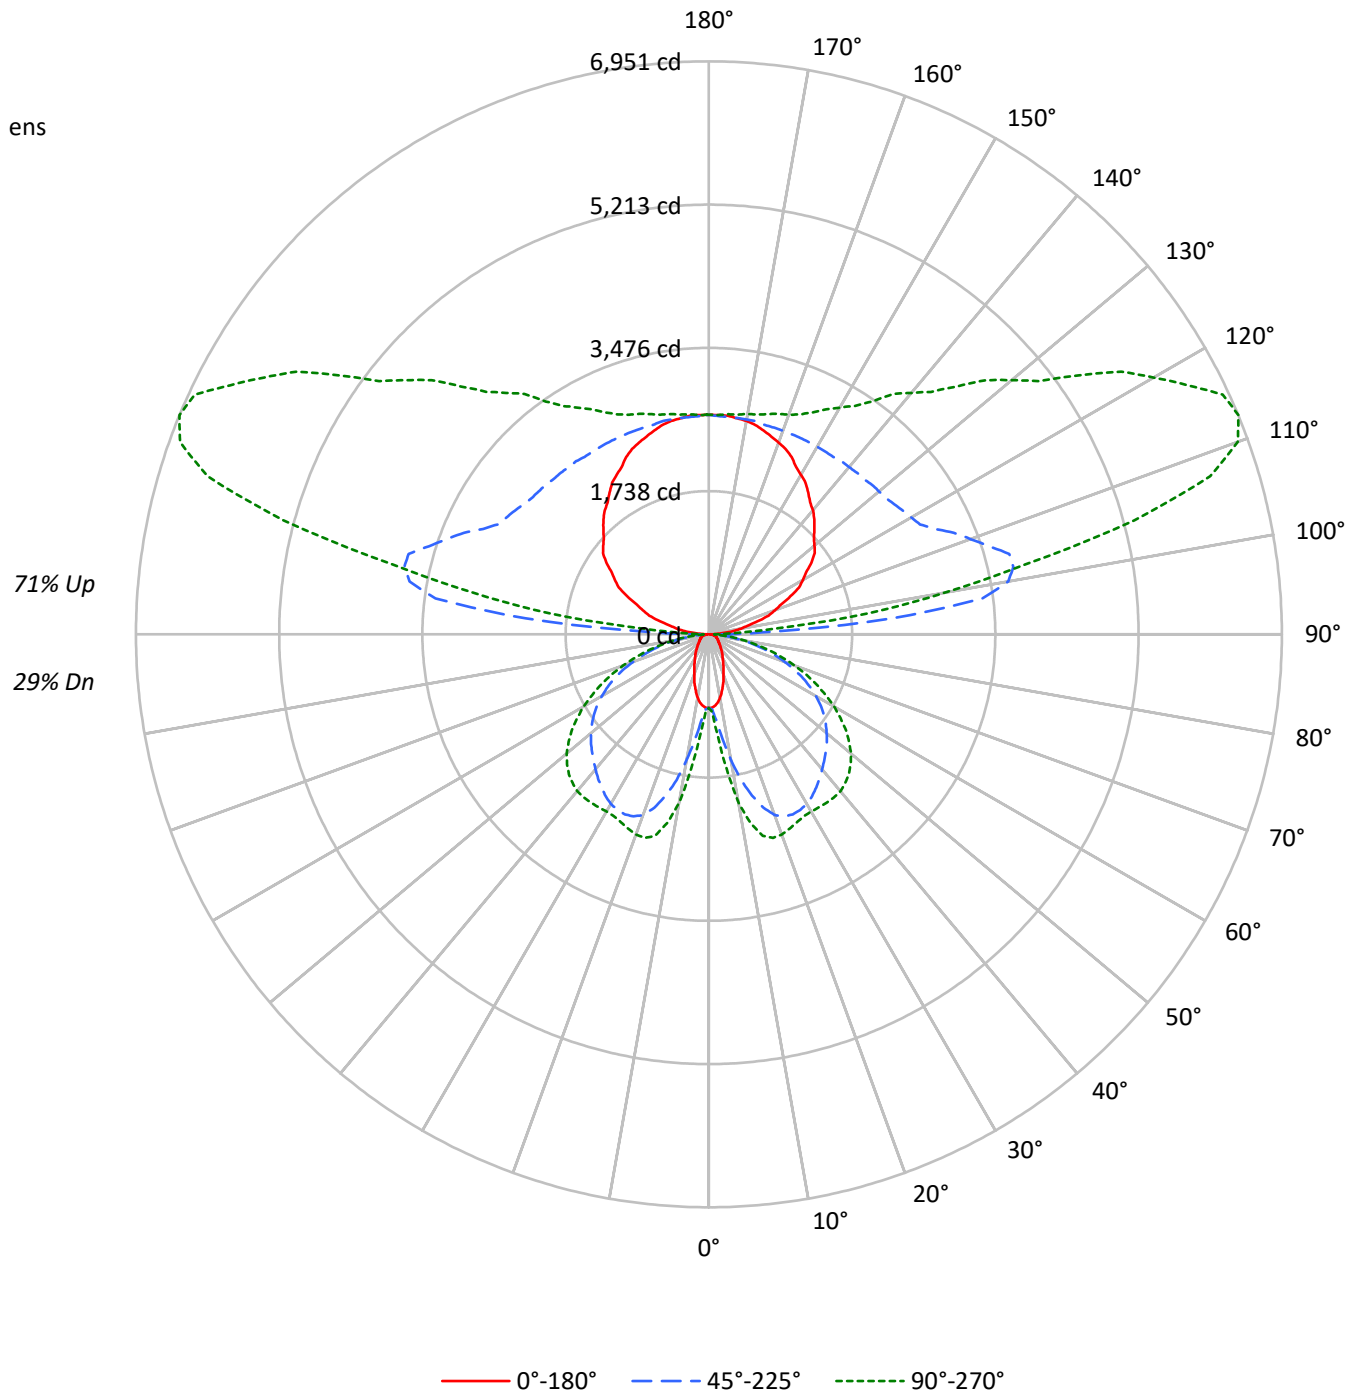



TEST NUMBER: P938380

CATALOG NUMBER: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	36	36	36	29
1	93	88	84	81	83	79	76	73	62	60	58	46	45	43	32	31	30	32	31	30	23
2	84	77	71	66	75	69	64	59	54	50	47	40	38	36	27	26	25	27	26	25	19
3	76	67	60	54	68	60	54	49	47	43	39	35	32	30	24	22	21	24	22	21	16
4	70	59	51	45	62	53	46	41	42	37	33	31	28	25	21	19	17	21	19	17	13
5	64	52	44	38	57	47	40	35	37	32	28	28	24	21	19	17	15	19	17	15	11
6	58	47	39	33	52	42	35	30	33	28	24	25	21	18	17	15	13	17	15	13	10
7	54	42	34	28	48	38	31	26	30	25	21	22	19	16	15	13	11	15	13	11	8
8	50	38	30	25	44	34	27	23	27	22	18	20	17	14	14	12	10	14	12	10	7
9	46	34	27	22	41	31	24	20	24	20	16	18	15	12	13	10	9	13	10	9	6
10	43	31	24	19	38	28	22	18	22	18	14	17	13	11	12	9	8	12	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2756	2756	2756
5°	2693	3186	3705
10°	2444	4646	6142
15°	2078	6071	7416
20°	1692	7037	7558
25°	1412	7366	7404
30°	1191	7414	7390
35°	1054	7293	7581
40°	919	7135	7779
45°	833	7020	7810
50°	764	6917	7680
55°	733	6765	7340
60°	751	6471	6802
65°	783	6023	6064
70°	835	5255	5123
75°	930	4289	3998
80°	1024	2978	2693
85°	927	1583	1379

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 7810 cd/sqm



TEST NUMBER: P938380

CATALOG NUMBER: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.3	0.5
10°-20°	510.8	2.1
20°-30°	893.5	3.7
30°-40°	1150.3	4.8
40°-50°	1284.8	5.3
50°-60°	1230.5	5.1
60°-70°	975.2	4.0
70°-80°	573.4	2.4
80°-90°	169.5	0.7
90°-100°	1297.8	5.4
100°-110°	3412.1	14.1
110°-120°	3538.0	14.6
120°-130°	2837.9	11.7
130°-140°	2226.7	9.2
140°-150°	1709.1	7.1
150°-160°	1230.8	5.1
160°-170°	753.1	3.1
170°-180°	254.4	1.1
0°-30°	1519.6	6.3
0°-40°	2669.9	11.0
0°-60°	5185.2	21.5
0°-90°	6903.3	28.6
90°-120°	8247.9	34.1
90°-150°	15021.7	62.2
90°-180°	17260.0	71.4
0°-180°	24163.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	891	891	891	891	891	
5°	868	931	1049	1186	1229	80
15°	650	1200	2023	2452	2530	181
25°	415	1361	2410	2516	2518	191
35°	281	1301	2269	2398	2493	175
45°	192	1037	2006	2298	2401	148
55°	138	659	1702	1977	2031	125
65°	109	350	1264	1421	1441	108
75°	80	215	693	762	765	84
85°	29	66	172	189	192	30
90°	18	50	136	68	68	17
95°	172	672	2236	1153	784	190
105°	615	931	3772	5727	5343	652
115°	1092	1326	3022	6027	6880	1078
125°	1519	1703	2748	4644	5479	1348
135°	1810	1992	2662	3749	4251	1401
145°	2100	2234	2628	3199	3449	1315
155°	2373	2439	2628	2886	2970	1090
165°	2561	2595	2628	2732	2766	723
175°	2662	2662	2646	2680	2680	253
180°	2662	2662	2662	2662	2662	



TEST NUMBER: P938380

CATALOG NUMBER: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	891.0	891.0	891.0	891.0	891.0	891.0	891.0	891.0	891.0	891.0	891.0
2.5°	891.0	891.0	896.7	899.6	905.3	908.2	913.9	919.7	936.9	939.7	945.4
5°	868.1	879.6	916.8	931.1	971.2	1025.7	1048.6	1085.9	1163.3	1186.2	1200.5
7.5°	833.7	859.5	951.2	974.1	1074.4	1217.7	1277.9	1358.1	1481.3	1541.5	1590.2
10°	779.3	833.7	997.0	1051.5	1214.9	1432.6	1544.3	1656.1	1842.3	1925.4	1956.9
12.5°	719.1	807.9	1045.7	1120.3	1355.2	1673.3	1807.9	1931.1	2143.1	2254.9	2272.0
15°	650.4	770.7	1091.7	1200.5	1504.2	1873.8	2022.8	2174.6	2372.3	2452.5	2472.6
17.5°	590.2	742.0	1134.6	1249.2	1618.8	2054.3	2206.1	2332.2	2492.6	2547.1	2561.4
20°	515.7	696.2	1163.3	1312.3	1739.2	2186.1	2332.2	2429.6	2538.5	2572.9	2578.6
22.5°	461.3	647.5	1180.5	1335.2	1819.4	2266.3	2389.5	2466.9	2541.4	2552.8	2555.7
25°	415.4	593.1	1177.6	1361.0	1888.1	2315.0	2409.6	2466.9	2509.8	2515.6	2515.6
27.5°	372.4	532.9	1166.2	1366.7	1939.7	2326.5	2401.0	2441.1	2461.1	2472.6	2472.6
30°	335.2	475.6	1137.5	1355.2	1962.6	2315.0	2375.2	2395.2	2415.3	2432.5	2441.1
32.5°	306.6	421.2	1094.5	1332.3	1965.5	2286.4	2329.3	2340.8	2369.5	2409.6	2423.9
35°	280.8	366.7	1045.7	1300.8	1948.3	2240.5	2269.2	2280.6	2337.9	2398.1	2418.2
37.5°	255.0	326.6	982.7	1246.4	1922.5	2186.1	2206.1	2226.2	2315.0	2386.6	2409.6
40°	229.2	292.2	908.2	1186.2	1882.4	2120.2	2137.4	2168.9	2286.4	2369.5	2392.4
42.5°	209.1	263.6	828.0	1123.2	1830.8	2045.7	2071.5	2117.3	2252.0	2340.8	2366.6
45°	192.0	234.9	742.0	1037.1	1764.9	1968.4	2005.6	2068.6	2211.9	2297.8	2320.7
47.5°	174.8	214.9	653.2	948.3	1693.3	1891.0	1939.7	2011.3	2157.4	2240.5	2260.6
50°	160.4	194.8	564.4	853.8	1616.0	1807.9	1865.2	1939.7	2088.7	2166.0	2191.8
52.5°	149.0	177.6	481.3	759.2	1527.1	1722.0	1787.9	1865.2	2005.6	2080.1	2097.3
55°	137.5	163.3	409.7	658.9	1435.5	1630.3	1701.9	1776.4	1913.9	1976.9	1988.4
57.5°	131.8	151.8	349.5	564.4	1338.1	1527.1	1607.4	1676.1	1805.0	1853.8	1865.2
60°	123.2	143.2	303.7	484.2	1232.0	1429.7	1498.5	1567.3	1676.1	1716.2	1724.8
62.5°	114.6	137.5	269.3	406.8	1123.2	1315.1	1383.9	1446.9	1538.6	1567.3	1578.7
65°	108.9	131.8	243.5	349.5	1011.3	1194.8	1263.6	1318.0	1392.5	1421.1	1426.9
67.5°	103.1	126.1	223.5	300.8	899.6	1074.4	1126.0	1177.6	1234.9	1263.6	1266.4
70°	94.5	120.3	206.3	266.4	785.0	936.9	979.8	1034.3	1080.1	1094.5	1103.1
72.5°	88.8	111.7	194.8	240.7	667.5	805.1	845.2	876.7	916.8	931.1	931.1
75°	80.2	100.3	183.4	214.9	547.2	658.9	693.3	724.8	756.4	762.1	753.5
77.5°	71.6	88.8	157.6	180.5	426.9	521.4	550.1	567.3	593.1	598.8	601.6
80°	60.2	77.4	123.2	140.4	309.4	383.9	404.0	418.3	441.2	441.2	446.9
82.5°	45.8	60.2	88.8	100.3	209.1	263.6	280.8	289.4	303.7	303.7	303.7
85°	28.6	37.2	57.3	65.9	126.1	160.4	171.9	174.8	186.2	189.1	189.1
87.5°	14.3	20.1	37.2	40.1	65.9	83.1	83.1	88.8	88.8	86.0	83.1
90°	17.9	32.2	46.5	50.0	78.6	116.7	135.8	120.7	90.5	67.9	67.9
92.5°	71.4	192.9	314.5	344.9	484.9	671.5	764.8	670.2	481.2	339.5	326.0
95°	171.5	393.8	616.3	671.8	1193.1	1888.0	2235.5	1994.8	1513.6	1152.6	1111.7
97.5°	296.6	492.8	688.9	738.0	1607.1	2765.8	3345.1	3193.0	2888.9	2660.7	2582.9
100°	393.1	571.0	748.9	793.4	1757.8	3043.5	3686.4	3697.5	3719.7	3736.4	3643.7
102.5°	475.3	641.3	807.3	848.8	1826.8	3130.9	3782.9	3976.7	4364.3	4655.0	4575.5
105°	614.7	755.3	895.9	931.0	1878.1	3140.8	3772.2	4206.6	5075.4	5727.0	5684.4
107.5°	757.7	888.7	1019.7	1052.5	1887.6	3001.0	3557.8	4163.7	5375.6	6284.6	6294.9
110°	854.2	972.5	1090.8	1120.4	1873.3	2877.1	3379.1	4056.6	5411.4	6427.5	6472.0



TEST NUMBER: P938380

CATALOG NUMBER: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	948.9	1061.7	1174.5	1202.6	1873.9	2768.9	3216.4	3909.8	5296.4	6336.4	6404.7
115°	1091.9	1195.9	1299.9	1325.9	1891.2	2644.9	3021.7	3689.6	5025.4	6027.3	6122.0
117.5°	1233.0	1327.4	1422.0	1445.6	1926.2	2567.1	2887.6	3490.4	4696.0	5600.2	5705.3
120°	1315.1	1404.1	1493.0	1515.3	1954.9	2541.0	2834.1	3384.8	4486.3	5312.5	5414.6
122.5°	1395.5	1485.3	1575.1	1597.5	1996.0	2527.3	2793.0	3288.9	4280.9	5024.8	5125.5
125°	1518.9	1600.7	1682.5	1703.0	2051.4	2516.0	2748.3	3169.6	4012.2	4644.2	4736.9
127.5°	1618.9	1701.5	1784.1	1804.8	2106.7	2509.5	2710.8	3072.5	3796.0	4338.7	4416.9
130°	1672.6	1761.5	1850.4	1872.7	2147.2	2513.4	2696.4	3018.5	3662.6	4145.7	4217.9
132.5°	1728.0	1816.9	1905.8	1928.0	2180.0	2515.9	2683.9	2972.2	3548.9	3981.3	4046.0
135°	1810.1	1891.1	1972.2	1992.4	2215.8	2513.7	2662.5	2904.0	3386.8	3748.9	3804.7
137.5°	1894.1	1974.4	2054.6	2074.6	2269.4	2529.0	2658.9	2863.0	3271.3	3577.4	3623.1
140°	1963.9	2037.7	2111.6	2130.0	2302.1	2531.6	2646.4	2822.7	3175.4	3439.8	3482.5
142.5°	2017.4	2085.7	2154.0	2171.1	2329.5	2540.8	2646.4	2801.3	3111.0	3343.4	3380.1
145°	2099.7	2159.3	2218.8	2233.6	2365.2	2540.8	2628.5	2755.2	3008.5	3198.6	3226.4
147.5°	2181.8	2239.8	2297.7	2312.2	2417.7	2558.3	2628.5	2728.2	2927.6	3077.1	3100.1
150°	2235.5	2287.9	2340.3	2353.4	2445.1	2567.4	2628.5	2712.8	2881.1	3007.4	3026.0
152.5°	2290.9	2330.6	2370.2	2380.1	2462.9	2573.3	2628.5	2700.5	2844.2	2952.0	2966.1
155°	2373.1	2402.5	2431.8	2439.2	2502.3	2586.4	2628.5	2685.7	2800.2	2885.9	2895.3
157.5°	2433.8	2462.4	2490.9	2498.1	2541.5	2599.5	2628.5	2673.0	2762.0	2828.7	2835.3
160°	2474.9	2497.1	2519.4	2524.9	2559.5	2605.5	2628.5	2666.6	2742.9	2800.1	2803.9
162.5°	2515.9	2532.7	2549.3	2553.5	2578.5	2611.8	2628.5	2660.7	2725.1	2773.3	2776.9
165°	2560.6	2575.7	2590.8	2594.6	2605.9	2621.0	2628.5	2651.6	2697.6	2732.2	2736.0
167.5°	2601.8	2609.0	2616.0	2617.8	2627.4	2640.1	2646.4	2661.5	2691.7	2714.3	2715.9
170°	2628.5	2635.7	2642.9	2644.7	2645.3	2646.0	2646.4	2661.5	2691.7	2714.3	2714.3
172.5°	2642.9	2644.4	2646.0	2646.4	2646.4	2646.4	2646.4	2658.3	2682.2	2700.1	2698.6
175°	2662.5	2662.5	2662.5	2662.5	2657.2	2650.0	2646.4	2653.9	2669.0	2680.4	2680.4
177.5°	2662.5	2662.5	2662.5	2662.5	2658.3	2652.8	2650.0	2656.0	2667.9	2676.8	2675.1
180°	2662.5	2662.5	2662.5	2662.5	2662.5	2662.5	2662.5	2662.5	2662.5	2662.5	2662.5



TEST NUMBER: P938380

CATALOG NUMBER: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	891.0	891.0
2.5°	951.2	945.4
5°	1223.5	1229.2
7.5°	1647.5	1644.6
10°	2048.6	2074.4
12.5°	2340.8	2346.5
15°	2518.4	2529.9
17.5°	2587.2	2590.1
20°	2590.1	2584.3
22.5°	2558.5	2552.8
25°	2521.3	2518.4
27.5°	2486.9	2489.8
30°	2472.6	2481.2
32.5°	2472.6	2486.9
35°	2478.3	2492.6
37.5°	2475.5	2492.6
40°	2464.0	2484.1
42.5°	2432.5	2446.8
45°	2383.8	2401.0
47.5°	2320.7	2332.2
50°	2240.5	2252.0
52.5°	2140.3	2143.1
55°	2019.9	2031.4
57.5°	1891.0	1893.9
60°	1747.7	1756.3
62.5°	1595.9	1595.9
65°	1435.5	1441.2
67.5°	1269.3	1283.6
70°	1100.3	1103.1
72.5°	934.0	934.0
75°	762.1	765.0
77.5°	598.8	598.8
80°	444.1	446.9
82.5°	306.6	312.3
85°	192.0	192.0
87.5°	88.8	80.2
90°	67.9	67.9
92.5°	272.0	218.0
95°	948.0	784.4
97.5°	2271.6	1960.2
100°	3272.9	2902.0
102.5°	4257.9	3940.1
105°	5513.7	5342.9
107.5°	6336.2	6377.5
110°	6650.0	6827.9



TEST NUMBER: P938380
CATALOG NUMBER: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	6677.9	6951.2
115°	6500.8	6879.6
117.5°	6125.4	6545.5
120°	5822.7	6231.0
122.5°	5528.2	5930.8
125°	5107.8	5478.7
127.5°	4729.8	5042.7
130°	4507.0	4796.1
132.5°	4304.9	4563.8
135°	4027.9	4251.1
137.5°	3805.8	3988.4
140°	3653.3	3824.0
142.5°	3527.0	3673.9
145°	3337.6	3448.8
147.5°	3192.3	3284.3
150°	3100.7	3175.4
152.5°	3022.5	3078.8
155°	2932.5	2969.9
157.5°	2861.5	2887.6
160°	2819.0	2834.1
162.5°	2791.2	2805.5
165°	2751.1	2766.2
167.5°	2722.2	2728.6
170°	2714.3	2714.3
172.5°	2693.1	2687.6
175°	2680.4	2680.4
177.5°	2668.8	2662.5
180°	2662.5	2662.5



TEST NUMBER: P938380
 CATALOG NUMBER: SQ4-FB-150U-075D-B2750-1D-UNV-STD-W-12-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.14	2.86	3.26	3.97	5.52	15.34	16.05	16.45	17.16	18.71
	3H	2.84	3.48	3.96	4.60	6.16	17.17	17.81	18.29	18.93	20.49
	4H	3.13	3.74	4.26	4.86	6.43	17.81	18.42	18.94	19.54	21.11
	6H	3.37	3.93	4.51	5.06	6.64	18.24	18.80	19.38	19.93	21.50
	8H	3.43	3.97	4.58	5.11	6.68	18.36	18.89	19.50	20.03	21.60
	12H	3.45	3.95	4.60	5.09	6.68	18.42	18.93	19.57	20.06	21.66
4H	2H	9.35	9.96	10.49	11.08	12.65	15.59	16.20	16.73	17.32	18.89
	3H	10.90	11.41	12.05	12.56	14.14	17.63	18.14	18.78	19.29	20.87
	4H	10.99	11.46	12.14	12.60	14.20	18.39	18.86	19.54	20.00	21.60
	6H	10.99	11.39	12.15	12.56	14.14	18.93	19.33	20.08	20.49	22.08
	8H	10.96	11.34	12.12	12.49	14.10	19.09	19.46	20.24	20.62	22.22
	12H	10.91	11.26	12.09	12.42	14.03	19.18	19.52	20.35	20.68	22.29
8H	4H	12.43	12.80	13.58	13.95	15.56	18.44	18.82	19.60	19.97	21.57
	6H	12.66	12.97	13.84	14.17	15.77	19.07	19.38	20.24	20.57	22.17
	8H	12.68	12.95	13.86	14.12	15.74	19.29	19.56	20.47	20.73	22.35
	12H	12.64	12.88	13.82	14.05	15.70	19.43	19.67	20.61	20.84	22.49
12H	4H	12.56	12.90	13.74	14.07	15.68	18.38	18.73	19.56	19.89	21.50
	6H	12.92	13.19	14.10	14.36	15.99	19.05	19.32	20.23	20.49	22.11
	8H	12.98	13.22	14.17	14.39	16.05	19.27	19.51	20.46	20.68	22.34