

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936381

Luminaire Tested: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936381  
REPORT IS A COMBINATION OF REPORTS P933430 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9453.9 lumens  
Efficiency: N/A  
Efficacy: 105.0 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 90  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936381  
CATALOG NUMBER: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K

### Luminous Intensity Polar Plot

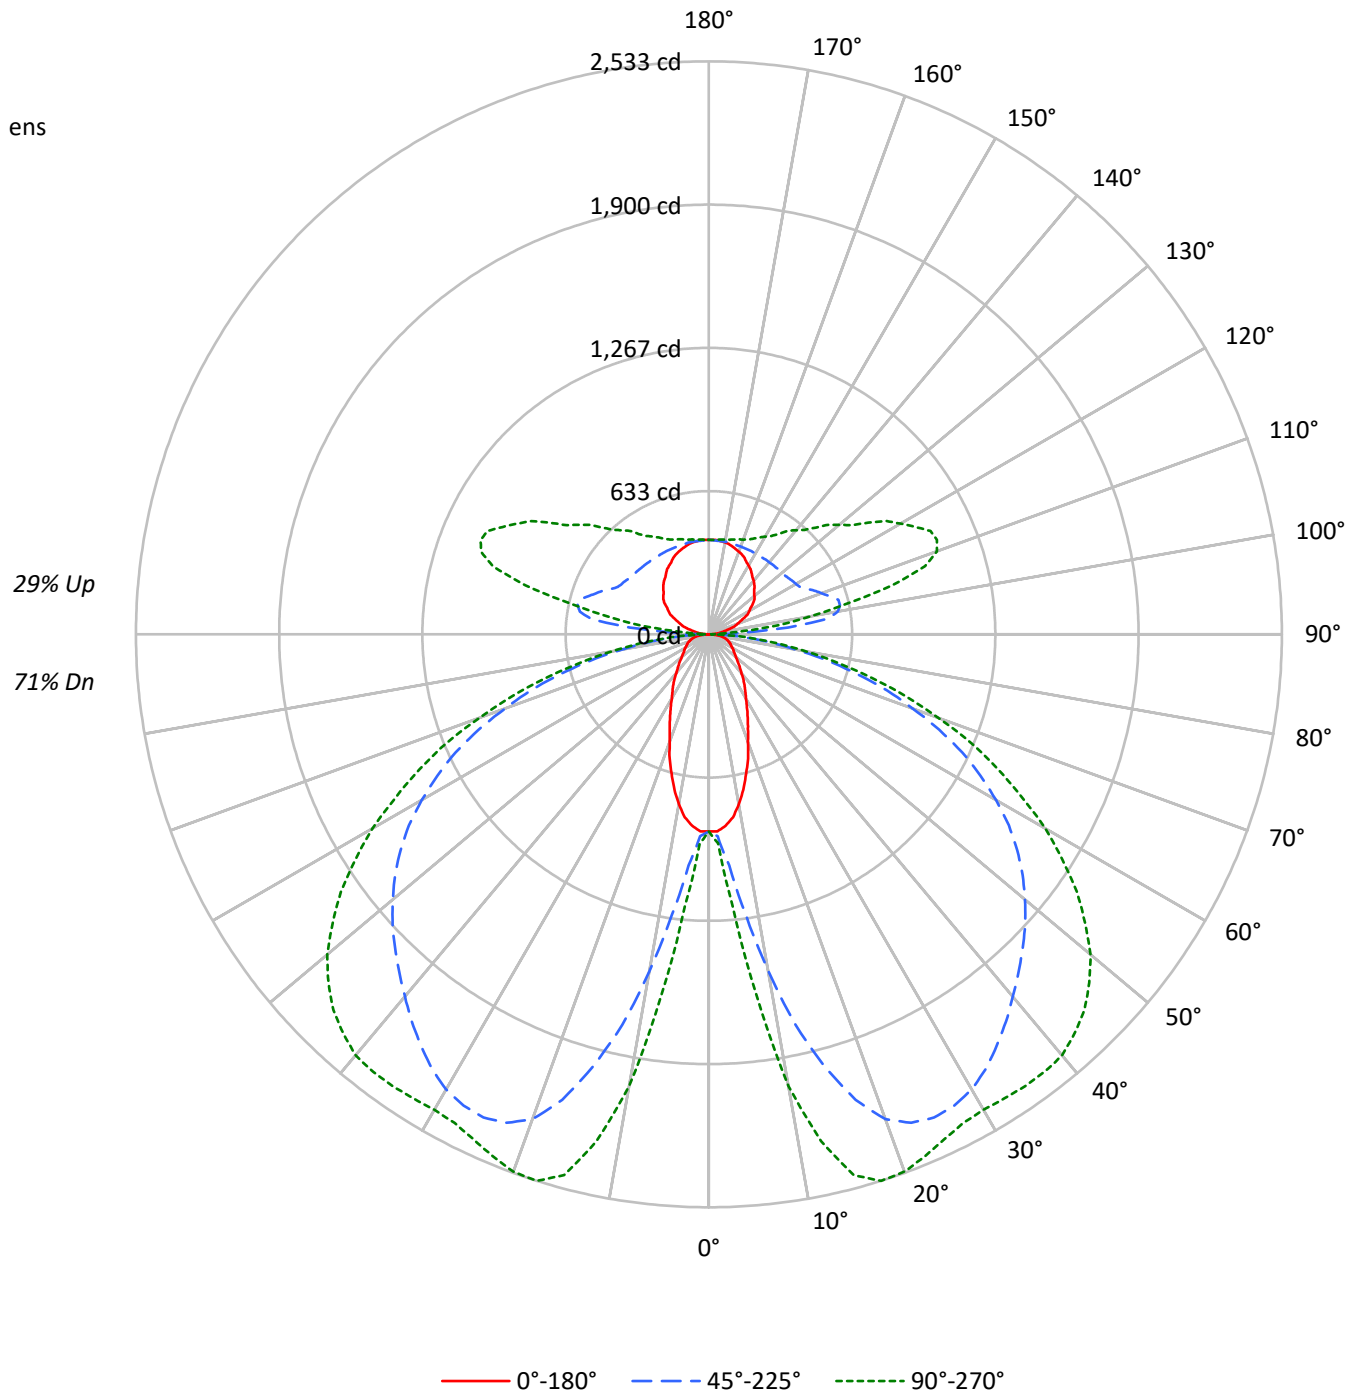



TEST NUMBER: P936381

CATALOG NUMBER: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	71	
1	102	97	93	89	96	92	88	85	82	79	77	74	71	69	66	64	62	62	58	
2	92	84	77	71	87	79	73	68	71	66	62	64	60	57	57	54	51	51	48	
3	83	73	65	58	79	69	62	56	62	56	51	56	51	47	50	46	43	43	39	
4	76	64	55	49	71	61	53	47	55	48	43	49	44	39	44	40	36	36	33	
5	69	57	48	41	65	54	46	40	49	42	37	44	38	34	39	34	31	31	28	
6	64	51	42	35	60	48	40	34	43	37	32	39	33	29	35	30	27	27	24	
7	59	45	37	31	55	43	35	30	39	32	27	35	30	25	32	27	23	23	21	
8	54	41	33	27	51	39	31	26	36	29	24	32	26	22	29	24	21	21	18	
9	51	37	29	24	48	36	28	23	32	26	21	29	24	20	26	22	18	18	16	
10	47	34	26	21	45	33	25	21	30	23	19	27	22	18	24	20	16	16	14	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2695	2695	2695
5°	2634	3116	3623
10°	2390	4544	6007
15°	2032	5938	7253
20°	1655	6882	7392
25°	1381	7204	7242
30°	1165	7251	7228
35°	1031	7133	7415
40°	899	6978	7608
45°	814	6866	7638
50°	748	6765	7512
55°	717	6616	7178
60°	735	6329	6653
65°	766	5890	5930
70°	818	5140	5010
75°	910	4195	3909
80°	1000	2913	2634
85°	907	1548	1348

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 7638 cd/sqm



TEST NUMBER: P936381

CATALOG NUMBER: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	112.7	1.2
10°-20°	499.6	5.3
20°-30°	873.9	9.2
30°-40°	1125.0	11.9
40°-50°	1256.5	13.3
50°-60°	1203.5	12.7
60°-70°	953.8	10.1
70°-80°	560.8	5.9
80°-90°	157.4	1.7
90°-100°	203.8	2.2
100°-110°	535.9	5.7
110°-120°	555.7	5.9
120°-130°	445.7	4.7
130°-140°	349.7	3.7
140°-150°	268.4	2.8
150°-160°	193.3	2.0
160°-170°	118.3	1.3
170°-180°	40.0	0.4
0°-30°	1486.2	15.7
0°-40°	2611.2	27.6
0°-60°	5071.2	53.6
0°-90°	6743.2	71.3
90°-120°	1295.4	13.7
90°-150°	2359.2	25.0
90°-180°	2711.0	28.7
0°-180°	9453.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	871	871	871	871	871	
5°	849	911	1026	1160	1202	78
15°	636	1174	1978	2399	2474	177
25°	406	1331	2357	2460	2463	187
35°	275	1272	2219	2345	2438	171
45°	188	1014	1962	2247	2348	145
55°	134	644	1664	1934	1987	123
65°	106	342	1236	1390	1410	106
75°	78	210	678	745	748	82
85°	28	64	168	185	188	30
90°	3	8	21	11	11	4
95°	27	106	351	181	123	30
105°	97	146	592	899	839	102
115°	172	208	475	947	1080	169
125°	238	268	432	729	860	212
135°	284	313	418	589	668	220
145°	330	351	413	502	542	207
155°	373	383	413	453	466	171
165°	402	408	413	429	434	114
175°	418	418	416	421	421	40
180°	418	418	418	418	418	



TEST NUMBER: P936381

CATALOG NUMBER: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	871.4	871.4	871.4	871.4	871.4	871.4	871.4	871.4	871.4	871.4	871.4
2.5°	871.4	871.4	877.0	879.8	885.4	888.2	893.8	899.4	916.3	919.1	924.7
5°	849.0	860.2	896.6	910.6	949.9	1003.1	1025.5	1062.1	1137.7	1160.1	1174.1
7.5°	815.4	840.6	930.3	952.7	1050.8	1190.9	1249.8	1328.2	1448.7	1507.6	1555.2
10°	762.1	815.4	975.1	1028.3	1188.1	1401.1	1510.4	1619.6	1801.8	1883.0	1913.9
12.5°	703.3	790.2	1022.7	1095.7	1325.4	1636.5	1768.2	1888.6	2096.0	2205.3	2222.1
15°	636.1	753.7	1067.7	1174.1	1471.1	1832.6	1978.3	2126.8	2320.1	2398.6	2418.2
17.5°	577.2	725.7	1109.7	1221.8	1583.2	2009.1	2157.6	2280.9	2437.8	2491.1	2505.1
20°	504.4	680.9	1137.7	1283.4	1700.9	2138.0	2280.9	2376.2	2482.7	2516.3	2521.9
22.5°	451.1	633.3	1154.5	1305.8	1779.4	2216.5	2337.0	2412.6	2485.5	2496.7	2499.5
25°	406.3	580.0	1151.7	1331.0	1846.6	2264.1	2356.6	2412.6	2454.6	2460.2	2460.2
27.5°	364.3	521.2	1140.5	1336.6	1897.0	2275.3	2348.2	2387.4	2407.0	2418.2	2418.2
30°	327.8	465.1	1112.5	1325.4	1919.5	2264.1	2323.0	2342.6	2362.2	2379.0	2387.4
32.5°	299.8	411.9	1070.5	1303.0	1922.3	2236.1	2278.1	2289.3	2317.3	2356.6	2370.6
35°	274.6	358.7	1022.7	1272.2	1905.5	2191.3	2219.3	2230.5	2286.5	2345.4	2365.0
37.5°	249.4	319.4	961.1	1219.0	1880.2	2138.0	2157.6	2177.2	2264.1	2334.2	2356.6
40°	224.2	285.8	888.2	1160.1	1841.0	2073.6	2090.4	2121.2	2236.1	2317.3	2339.8
42.5°	204.5	257.8	809.8	1098.5	1790.6	2000.7	2025.9	2070.8	2202.5	2289.3	2314.5
45°	187.7	229.8	725.7	1014.3	1726.1	1925.1	1961.5	2023.1	2163.2	2247.3	2269.7
47.5°	170.9	210.2	638.9	927.5	1656.1	1849.4	1897.0	1967.1	2110.0	2191.3	2210.9
50°	156.9	190.5	552.0	835.0	1580.4	1768.2	1824.2	1897.0	2042.8	2118.4	2143.6
52.5°	145.7	173.7	470.7	742.5	1493.6	1684.1	1748.5	1824.2	1961.5	2034.3	2051.2
55°	134.5	159.7	400.7	644.5	1403.9	1594.4	1664.5	1737.3	1871.8	1933.5	1944.7
57.5°	128.9	148.5	341.8	552.0	1308.6	1493.6	1572.0	1639.3	1765.4	1813.0	1824.2
60°	120.5	140.1	297.0	473.5	1205.0	1398.3	1465.5	1532.8	1639.3	1678.5	1686.9
62.5°	112.1	134.5	263.4	397.9	1098.5	1286.2	1353.5	1415.1	1504.8	1532.8	1544.0
65°	106.5	128.9	238.2	341.8	989.1	1168.5	1235.8	1289.0	1361.9	1389.9	1395.5
67.5°	100.9	123.3	218.6	294.2	879.8	1050.8	1101.3	1151.7	1207.8	1235.8	1238.6
70°	92.5	117.7	201.7	260.6	767.7	916.3	958.3	1011.5	1056.4	1070.5	1078.9
72.5°	86.9	109.3	190.5	235.4	652.9	787.4	826.6	857.4	896.6	910.6	910.6
75°	78.5	98.1	179.3	210.2	535.2	644.5	678.1	708.9	739.7	745.3	736.9
77.5°	70.0	86.9	154.1	176.5	417.5	510.0	538.0	554.8	580.0	585.6	588.4
80°	58.8	75.7	120.5	137.3	302.6	375.5	395.1	409.1	431.5	431.5	437.1
82.5°	44.8	58.8	86.9	98.1	204.5	257.8	274.6	283.0	297.0	297.0	297.0
85°	28.0	36.4	56.0	64.4	123.3	156.9	168.1	170.9	182.1	184.9	184.9
87.5°	14.0	19.6	36.4	39.2	64.4	81.3	81.3	86.9	86.9	84.1	81.3
90°	2.8	5.0	7.3	7.8	12.3	18.3	21.3	19.0	14.2	10.6	10.6
92.5°	11.2	30.3	49.4	54.2	76.1	105.4	120.1	105.3	75.6	53.3	51.2
95°	26.9	61.8	96.8	105.5	187.4	296.5	351.1	313.3	237.7	181.0	174.6
97.5°	46.6	77.4	108.3	115.9	252.4	434.4	525.4	501.5	453.7	417.9	405.6
100°	61.7	89.7	117.6	124.6	276.1	478.0	579.0	580.8	584.2	586.8	572.3
102.5°	74.6	100.7	126.7	133.3	286.9	491.8	594.1	624.6	685.4	731.0	718.5
105°	96.6	118.6	140.7	146.2	295.0	493.2	592.4	660.6	797.1	899.4	892.7
107.5°	119.0	139.5	160.2	165.3	296.5	471.3	558.7	653.9	844.2	987.1	988.6
110°	134.1	152.7	171.3	176.0	294.2	451.9	530.7	637.1	849.8	1009.5	1016.5



TEST NUMBER: P936381

CATALOG NUMBER: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	149.1	166.7	184.5	188.9	294.3	434.9	505.2	614.1	831.8	995.2	1005.9
115°	171.5	187.8	204.2	208.3	297.0	415.3	474.6	579.5	789.2	946.6	961.5
117.5°	193.6	208.5	223.3	227.1	302.5	403.2	453.6	548.3	737.6	879.5	896.1
120°	206.5	220.5	234.5	238.0	307.0	399.0	445.1	531.5	704.6	834.3	850.4
122.5°	219.2	233.3	247.3	250.9	313.5	396.9	438.6	516.5	672.3	789.1	804.9
125°	238.5	251.4	264.3	267.5	322.2	395.2	431.6	497.7	630.1	729.4	743.9
127.5°	254.2	267.2	280.2	283.5	330.9	394.1	425.7	482.5	596.2	681.4	693.7
130°	262.6	276.7	290.7	294.1	337.3	394.7	423.5	474.1	575.3	651.1	662.5
132.5°	271.4	285.3	299.3	302.8	342.4	395.2	421.5	466.8	557.4	625.3	635.5
135°	284.3	297.0	309.7	312.9	348.0	394.8	418.2	456.1	531.9	588.8	597.6
137.5°	297.5	310.1	322.6	325.8	356.4	397.2	417.6	449.6	513.7	561.8	569.0
140°	308.4	320.0	331.7	334.6	361.6	397.6	415.6	443.3	498.7	540.2	547.0
142.5°	316.8	327.6	338.3	341.0	365.8	399.0	415.6	439.9	488.6	525.1	530.9
145°	329.8	339.1	348.5	350.8	371.5	399.0	412.8	432.7	472.5	502.3	506.7
147.5°	342.7	351.7	360.9	363.1	379.7	401.8	412.8	428.5	459.8	483.3	486.9
150°	351.1	359.3	367.5	369.6	384.0	403.2	412.8	426.1	452.5	472.3	475.2
152.5°	359.8	366.0	372.2	373.8	386.8	404.1	412.8	424.1	446.7	463.6	465.9
155°	372.7	377.2	381.9	383.0	392.9	406.2	412.8	421.8	439.8	453.3	454.8
157.5°	382.2	386.7	391.3	392.4	399.2	408.3	412.8	419.8	433.7	444.2	445.2
160°	388.7	392.2	395.7	396.6	402.0	409.2	412.8	418.8	430.8	439.7	440.3
162.5°	395.2	397.8	400.4	401.1	405.0	410.2	412.8	417.9	428.0	435.5	436.1
165°	402.2	404.5	406.9	407.5	409.3	411.6	412.8	416.5	423.7	429.1	429.6
167.5°	408.6	409.7	410.9	411.1	412.6	414.6	415.6	418.0	422.7	426.3	426.6
170°	412.8	413.9	415.1	415.3	415.4	415.5	415.6	418.0	422.7	426.3	426.3
172.5°	415.1	415.3	415.5	415.6	415.6	415.6	415.6	417.5	421.2	424.0	423.8
175°	418.2	418.2	418.2	418.2	417.3	416.2	415.6	416.8	419.2	421.0	421.0
177.5°	418.2	418.2	418.2	418.2	417.5	416.7	416.2	417.1	419.0	420.4	420.1
180°	418.2	418.2	418.2	418.2	418.2	418.2	418.2	418.2	418.2	418.2	418.2



TEST NUMBER: P936381

CATALOG NUMBER: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	871.4	871.4
2.5°	930.3	924.7
5°	1196.5	1202.2
7.5°	1611.2	1608.4
10°	2003.5	2028.7
12.5°	2289.3	2294.9
15°	2463.1	2474.3
17.5°	2530.3	2533.1
20°	2533.1	2527.5
22.5°	2502.3	2496.7
25°	2465.9	2463.1
27.5°	2432.2	2435.0
30°	2418.2	2426.6
32.5°	2418.2	2432.2
35°	2423.8	2437.8
37.5°	2421.0	2437.8
40°	2409.8	2429.4
42.5°	2379.0	2393.0
45°	2331.4	2348.2
47.5°	2269.7	2280.9
50°	2191.3	2202.5
52.5°	2093.2	2096.0
55°	1975.5	1986.7
57.5°	1849.4	1852.2
60°	1709.3	1717.7
62.5°	1560.8	1560.8
65°	1403.9	1409.5
67.5°	1241.4	1255.4
70°	1076.1	1078.9
72.5°	913.5	913.5
75°	745.3	748.1
77.5°	585.6	585.6
80°	434.3	437.1
82.5°	299.8	305.4
85°	187.7	187.7
87.5°	86.9	78.5
90°	10.6	10.6
92.5°	42.8	34.3
95°	148.9	123.2
97.5°	356.8	307.8
100°	514.1	455.8
102.5°	668.7	618.8
105°	865.9	839.1
107.5°	995.2	1001.6
110°	1044.4	1072.3





TEST NUMBER: P936381

CATALOG NUMBER: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	1048.8	1091.7
115°	1021.0	1080.5
117.5°	962.0	1028.0
120°	914.5	978.6
122.5°	868.2	931.5
125°	802.1	860.4
127.5°	742.8	791.9
130°	707.9	753.3
132.5°	676.1	716.8
135°	632.6	667.6
137.5°	597.7	626.4
140°	573.8	600.6
142.5°	554.0	577.0
145°	524.2	541.6
147.5°	501.4	515.8
150°	487.0	498.7
152.5°	474.7	483.5
155°	460.6	466.4
157.5°	449.4	453.6
160°	442.7	445.1
162.5°	438.3	440.6
165°	432.1	434.4
167.5°	427.5	428.5
170°	426.3	426.3
172.5°	422.9	422.1
175°	421.0	421.0
177.5°	419.2	418.2
180°	418.2	418.2



TEST NUMBER: P936381  
 CATALOG NUMBER: SQ4-FB-025U-075D-B2750-1D-UNV-STD-W-12-5000K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.19	7.35	6.94	8.12	9.04	19.39	20.54	20.13	21.31	22.24
	3H	6.92	7.96	7.68	8.74	9.70	21.25	22.29	22.01	23.07	24.03
	4H	7.23	8.22	8.00	9.01	9.97	21.92	22.90	22.69	23.69	24.66
	6H	7.50	8.41	8.28	9.21	10.19	22.37	23.28	23.15	24.07	25.06
	8H	7.57	8.44	8.37	9.26	10.24	22.50	23.37	23.29	24.18	25.17
	12H	7.60	8.43	8.40	9.24	10.25	22.58	23.41	23.38	24.22	25.23
4H	2H	13.45	14.44	14.23	15.23	16.19	19.70	20.68	20.47	21.47	22.44
	3H	15.05	15.87	15.84	16.70	17.68	21.77	22.60	22.56	23.42	24.41
	4H	15.15	15.91	15.96	16.73	17.74	22.56	23.31	23.36	24.13	25.14
	6H	15.18	15.84	16.00	16.68	17.70	23.12	23.77	23.94	24.62	25.64
	8H	15.17	15.78	15.99	16.62	17.65	23.29	23.90	24.11	24.74	25.78
	12H	15.14	15.69	15.98	16.55	17.59	23.40	23.95	24.25	24.82	25.85
8H	4H	16.63	17.24	17.45	18.08	19.11	22.64	23.25	23.47	24.10	25.13
	6H	16.88	17.39	17.74	18.28	19.31	23.29	23.80	24.14	24.68	25.71
	8H	16.91	17.36	17.77	18.24	19.29	23.52	23.97	24.38	24.85	25.90
	12H	16.89	17.29	17.76	18.16	19.26	23.68	24.08	24.55	24.95	26.05
12H	4H	16.79	17.34	17.63	18.20	19.24	22.61	23.16	23.45	24.02	25.06
	6H	17.15	17.60	18.01	18.48	19.53	23.28	23.73	24.14	24.61	25.66
	8H	17.23	17.63	18.10	18.50	19.60	23.52	23.92	24.39	24.79	25.90