

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936696

Luminaire Tested: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936696  
REPORT IS A COMBINATION OF REPORTS P933485 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6735.1 lumens  
Efficiency: N/A  
Efficacy: 118.6 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 56.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936696  
CATALOG NUMBER: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K

### Luminous Intensity Polar Plot

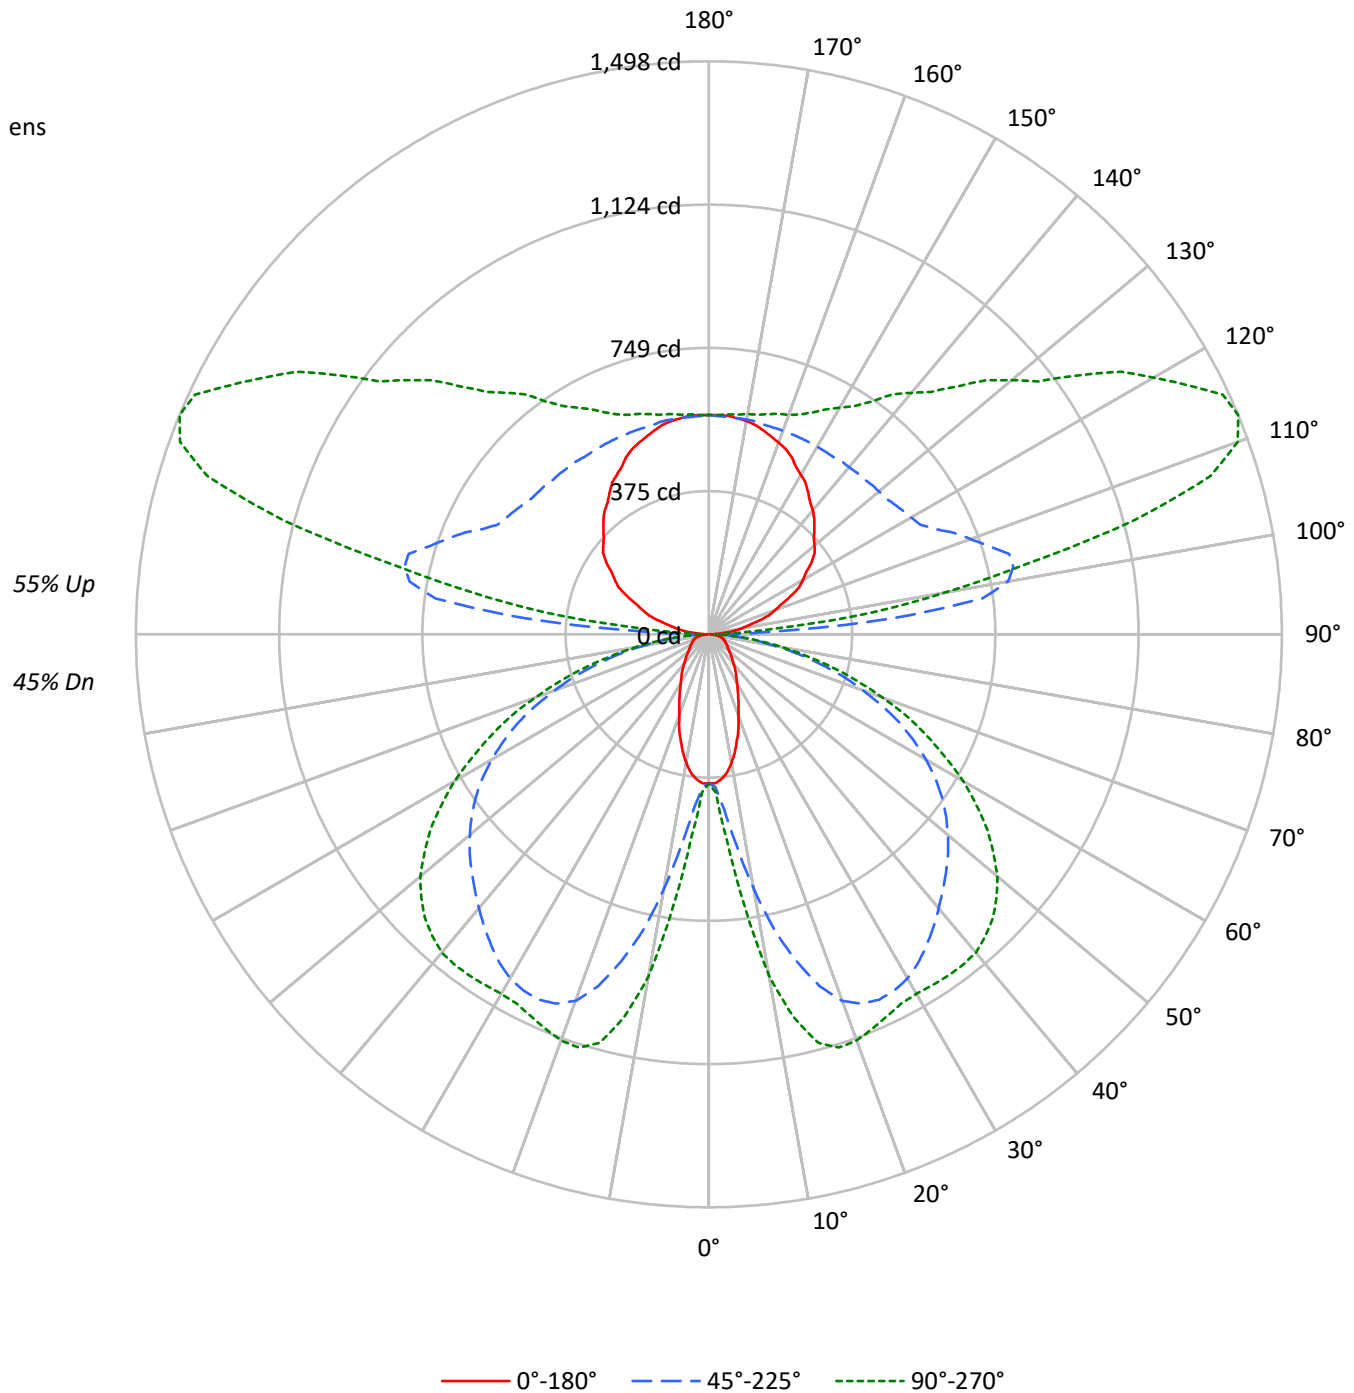



TEST NUMBER: P936696

CATALOG NUMBER: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	96	92	88	84	88	84	81	77	70	67	65	57	55	53	45	43	42	37
2	87	79	73	68	79	73	67	63	60	56	53	49	46	44	39	37	35	30
3	79	69	62	56	72	64	57	52	53	48	44	43	39	36	34	31	29	25
4	72	61	53	47	66	56	49	43	47	41	37	38	34	31	30	27	24	21
5	66	54	46	39	60	50	42	37	41	36	31	34	29	26	26	23	21	18
6	60	48	40	34	55	44	37	31	37	31	27	30	26	22	24	21	18	15
7	56	43	35	29	51	40	32	27	33	28	23	27	23	20	21	18	16	13
8	51	39	31	26	47	36	29	24	30	25	21	25	20	17	20	16	14	12
9	48	35	28	23	44	33	26	21	27	22	18	23	18	15	18	15	12	10
10	45	32	25	20	41	30	23	19	25	20	16	21	17	14	17	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1808	1808	1808
5°	1766	2089	2430
10°	1602	3046	4028
15°	1361	3979	4864
20°	1108	4611	4957
25°	925	4825	4856
30°	779	4855	4847
35°	689	4775	4973
40°	601	4670	5102
45°	544	4593	5122
50°	499	4525	5037
55°	478	4423	4814
60°	490	4229	4461
65°	509	3934	3977
70°	543	3430	3360
75°	601	2797	2622
80°	656	1939	1766
85°	582	1030	905

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 5122 cd/sqm



TEST NUMBER: P936696

CATALOG NUMBER: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	50.4	0.7
10°-20°	223.4	3.3
20°-30°	390.7	5.8
30°-40°	502.9	7.5
40°-50°	561.8	8.3
50°-60°	538.1	8.0
60°-70°	426.4	6.3
70°-80°	250.7	3.7
80°-90°	71.9	1.1
90°-100°	279.6	4.2
100°-110°	735.2	10.9
110°-120°	762.3	11.3
120°-130°	611.4	9.1
130°-140°	479.8	7.1
140°-150°	368.3	5.5
150°-160°	265.2	3.9
160°-170°	162.3	2.4
170°-180°	54.8	0.8
0°-30°	664.5	9.9
0°-40°	1167.4	17.3
0°-60°	2267.2	33.7
0°-90°	3016.2	44.8
90°-120°	1777.1	26.4
90°-150°	3236.6	48.1
90°-180°	3719.0	55.2
0°-180°	6735.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	390	390	390	390	390	
5°	380	407	458	519	537	35
15°	284	525	884	1072	1106	79
25°	182	595	1054	1100	1101	84
35°	123	569	992	1049	1090	77
45°	84	454	877	1005	1050	65
55°	60	288	744	864	888	55
65°	48	153	552	621	630	47
75°	35	94	303	333	334	37
85°	12	29	75	83	84	13
90°	4	11	29	15	15	4
95°	37	145	482	248	169	41
105°	132	201	813	1234	1151	140
115°	235	286	651	1299	1482	232
125°	327	367	592	1001	1180	291
135°	390	429	574	808	916	302
145°	452	481	566	689	743	283
155°	511	526	566	622	640	235
165°	552	559	566	589	596	156
175°	574	574	570	578	578	54
180°	574	574	574	574	574	



TEST NUMBER: P936696

CATALOG NUMBER: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	389.6	389.6	389.6	389.6	389.6	389.6	389.6	389.6	389.6	389.6	389.6
2.5°	389.6	389.6	392.1	393.4	395.8	397.1	399.7	402.2	409.7	410.9	413.4
5°	379.6	384.6	400.9	407.1	424.7	448.5	458.5	474.8	508.7	518.7	524.9
7.5°	364.5	375.8	415.9	425.9	469.8	532.4	558.7	593.8	647.6	674.0	695.3
10°	340.7	364.5	436.0	459.8	531.2	626.3	675.3	724.1	805.5	841.8	855.6
12.5°	314.5	353.2	457.3	489.8	592.5	731.6	790.5	844.3	937.1	985.9	993.4
15°	284.4	337.0	477.3	524.9	657.7	819.3	884.5	950.8	1037.3	1072.3	1081.1
17.5°	258.1	324.5	496.1	546.2	707.8	898.2	964.6	1019.7	1089.9	1113.7	1120.0
20°	225.5	304.4	508.7	573.8	760.5	955.9	1019.7	1062.3	1110.0	1125.0	1127.5
22.5°	201.7	283.1	516.1	583.8	795.5	991.0	1044.8	1078.7	1111.2	1116.2	1117.4
25°	181.7	259.3	514.9	595.1	825.6	1012.3	1053.6	1078.7	1097.4	1100.0	1100.0
27.5°	162.9	233.0	509.9	597.6	848.2	1017.2	1049.8	1067.4	1076.2	1081.1	1081.1
30°	146.5	208.0	497.4	592.5	858.2	1012.3	1038.5	1047.3	1056.1	1063.6	1067.4
32.5°	134.0	184.2	478.6	582.5	859.4	999.7	1018.5	1023.5	1036.0	1053.6	1059.8
35°	122.7	160.4	457.3	568.7	851.9	979.7	992.2	997.2	1022.3	1048.6	1057.3
37.5°	111.5	142.8	429.7	545.0	840.6	955.9	964.6	973.4	1012.3	1043.6	1053.6
40°	100.2	127.8	397.1	518.7	823.0	927.1	934.6	948.4	999.7	1036.0	1046.1
42.5°	91.4	115.3	362.0	491.1	800.5	894.5	905.8	925.8	984.7	1023.5	1034.8
45°	84.0	102.7	324.5	453.5	771.7	860.7	876.9	904.5	967.2	1004.7	1014.7
47.5°	76.4	94.0	285.6	414.7	740.4	826.9	848.2	879.5	943.3	979.7	988.5
50°	70.1	85.2	246.8	373.3	706.6	790.5	815.6	848.2	913.3	947.1	958.4
52.5°	65.1	77.7	210.4	331.9	667.7	752.9	781.8	815.6	876.9	909.5	917.0
55°	60.1	71.5	179.1	288.1	627.6	712.8	744.1	776.7	836.9	864.4	869.5
57.5°	57.6	66.4	152.8	246.8	585.1	667.7	702.8	732.9	789.2	810.5	815.6
60°	53.9	62.7	132.8	211.7	538.7	625.1	655.2	685.3	732.9	750.4	754.2
62.5°	50.2	60.1	117.8	177.9	491.1	575.1	605.0	632.7	672.8	685.3	690.3
65°	47.6	57.6	106.5	152.8	442.2	522.4	552.5	576.3	608.9	621.4	623.9
67.5°	45.1	55.1	97.7	131.5	393.4	469.8	492.3	514.9	539.9	552.5	553.7
70°	41.4	52.6	90.2	116.5	343.2	409.7	428.4	452.2	472.3	478.6	482.3
72.5°	38.9	48.8	85.2	105.3	291.9	352.0	369.6	383.3	400.9	407.1	407.1
75°	35.1	43.8	80.1	94.0	239.3	288.1	303.2	316.9	330.7	333.3	329.5
77.5°	31.3	38.9	68.9	78.9	186.7	228.0	240.5	248.1	259.3	261.8	263.1
80°	26.3	33.8	53.9	61.4	135.3	167.8	176.6	182.9	193.0	193.0	195.4
82.5°	20.1	26.3	38.9	43.8	91.4	115.3	122.7	126.6	132.8	132.8	132.8
85°	12.5	16.3	25.0	28.8	55.1	70.1	75.2	76.4	81.4	82.7	82.7
87.5°	6.3	8.8	16.3	17.6	28.8	36.3	36.3	38.9	38.9	37.5	36.3
90°	3.8	6.9	10.0	10.7	16.9	25.1	29.2	26.0	19.5	14.7	14.7
92.5°	15.4	41.6	67.8	74.3	104.5	144.7	164.8	144.4	103.7	73.1	70.2
95°	37.0	84.9	132.8	144.8	257.0	406.8	481.7	429.8	326.2	248.4	239.6
97.5°	63.9	106.1	148.4	159.0	346.2	595.9	720.8	688.0	622.4	573.3	556.5
100°	84.7	123.0	161.3	170.9	378.7	655.8	794.3	796.7	801.5	805.0	785.0
102.5°	102.5	138.2	173.9	182.9	393.6	674.6	815.1	856.9	940.4	1002.9	985.8
105°	132.4	162.7	193.1	200.6	404.7	676.8	812.8	906.4	1093.6	1234.0	1224.8
107.5°	163.3	191.5	219.7	226.8	406.7	646.6	766.5	897.1	1158.3	1354.1	1356.4
110°	184.0	209.5	235.1	241.4	403.7	619.9	728.1	874.0	1165.9	1384.8	1394.5



TEST NUMBER: P936696

CATALOG NUMBER: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	204.5	228.7	253.0	259.1	403.8	596.6	693.0	842.4	1141.2	1365.2	1380.0
115°	235.3	257.7	280.1	285.7	407.5	569.9	651.1	795.0	1082.8	1298.6	1319.0
117.5°	265.6	286.0	306.4	311.5	415.1	553.1	622.1	752.1	1011.8	1206.6	1229.2
120°	283.4	302.5	321.8	326.5	421.2	547.5	610.6	729.3	966.6	1144.6	1166.6
122.5°	300.7	320.0	339.3	344.2	430.0	544.5	601.8	708.6	922.4	1082.7	1104.4
125°	327.3	344.8	362.5	366.9	442.0	542.1	592.2	682.9	864.5	1000.7	1020.7
127.5°	348.8	366.6	384.3	388.8	453.9	540.7	584.0	662.0	817.9	934.8	951.7
130°	360.3	379.5	398.7	403.5	462.6	541.5	580.9	650.3	789.1	893.2	908.8
132.5°	372.3	391.4	410.7	415.4	469.7	542.1	578.3	640.4	764.7	857.8	871.7
135°	390.0	407.5	424.9	429.3	477.4	541.5	573.7	625.7	729.7	807.7	819.8
137.5°	408.2	425.4	442.7	447.0	488.9	544.9	572.9	616.9	704.9	770.8	780.6
140°	423.1	439.1	455.0	459.0	496.0	545.5	570.2	608.2	684.2	741.1	750.3
142.5°	434.7	449.3	464.1	467.7	501.9	547.4	570.2	603.6	670.3	720.4	728.3
145°	452.4	465.2	478.1	481.3	509.7	547.5	566.4	593.7	648.3	689.2	695.2
147.5°	470.1	482.6	495.1	498.2	520.9	551.2	566.4	587.9	630.7	663.0	667.9
150°	481.7	493.0	504.3	507.1	526.9	553.2	566.4	584.5	620.8	648.0	652.0
152.5°	493.6	502.2	510.7	512.9	530.7	554.5	566.4	581.9	612.8	636.1	639.1
155°	511.3	517.6	524.0	525.6	539.2	557.3	566.4	578.7	603.3	621.8	623.8
157.5°	524.3	530.5	536.7	538.3	547.6	560.1	566.4	575.9	595.1	609.4	610.8
160°	533.2	538.1	542.8	544.1	551.5	561.4	566.4	574.6	590.9	603.3	604.1
162.5°	542.1	545.7	549.3	550.2	555.6	562.8	566.4	573.3	587.2	597.6	598.3
165°	551.7	555.0	558.2	559.0	561.4	564.7	566.4	571.3	581.2	588.7	589.5
167.5°	560.6	562.1	563.7	564.0	566.1	568.8	570.2	573.5	580.0	584.9	585.2
170°	566.4	567.9	569.5	569.8	569.9	570.1	570.2	573.5	580.0	584.9	584.9
172.5°	569.5	569.8	570.1	570.2	570.2	570.2	570.2	572.8	578.0	581.8	581.5
175°	573.7	573.7	573.7	573.7	572.5	571.0	570.2	571.8	575.1	577.5	577.5
177.5°	573.7	573.7	573.7	573.7	572.7	571.5	571.0	572.3	574.8	576.7	576.4
180°	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7



TEST NUMBER: P936696

CATALOG NUMBER: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	389.6	389.6
2.5°	415.9	413.4
5°	534.9	537.4
7.5°	720.3	719.1
10°	895.7	907.0
12.5°	1023.5	1026.0
15°	1101.2	1106.2
17.5°	1131.3	1132.5
20°	1132.5	1130.0
22.5°	1118.7	1116.2
25°	1102.4	1101.2
27.5°	1087.4	1088.7
30°	1081.1	1084.9
32.5°	1081.1	1087.4
35°	1083.6	1089.9
37.5°	1082.4	1089.9
40°	1077.4	1086.1
42.5°	1063.6	1069.9
45°	1042.3	1049.8
47.5°	1014.7	1019.7
50°	979.7	984.7
52.5°	935.8	937.1
55°	883.2	888.2
57.5°	826.9	828.1
60°	764.2	767.9
62.5°	697.8	697.8
65°	627.6	630.2
67.5°	555.0	561.2
70°	481.1	482.3
72.5°	408.4	408.4
75°	333.3	334.5
77.5°	261.8	261.8
80°	194.2	195.4
82.5°	134.0	136.6
85°	84.0	84.0
87.5°	38.9	35.1
90°	14.7	14.7
92.5°	58.6	47.0
95°	204.3	169.1
97.5°	489.4	422.4
100°	705.2	625.2
102.5°	917.4	848.9
105°	1188.0	1151.2
107.5°	1365.2	1374.1
110°	1432.8	1471.1





TEST NUMBER: P936696

CATALOG NUMBER: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	1438.8	1497.7
115°	1400.6	1482.3
117.5°	1319.8	1410.3
120°	1254.5	1342.5
122.5°	1191.1	1277.9
125°	1100.5	1180.5
127.5°	1019.1	1086.5
130°	971.1	1033.4
132.5°	927.6	983.3
135°	867.9	916.0
137.5°	820.1	859.4
140°	787.1	823.9
142.5°	759.9	791.6
145°	719.2	743.1
147.5°	687.8	707.7
150°	668.1	684.2
152.5°	651.3	663.4
155°	631.9	639.9
157.5°	616.5	622.1
160°	607.4	610.6
162.5°	601.4	604.5
165°	592.7	596.0
167.5°	586.6	588.0
170°	584.9	584.9
172.5°	580.3	579.1
175°	577.5	577.5
177.5°	575.1	573.7
180°	573.7	573.7



TEST NUMBER: P936696  
 CATALOG NUMBER: SQ4-FB-050U-050D-B2750-1D-UNV-STD-W-8-5000K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.57	3.41	3.56	4.42	5.77	15.75	16.59	16.74	17.60	18.95
	3H	3.27	4.03	4.27	5.05	6.41	17.58	18.35	18.59	19.37	20.73
	4H	3.57	4.29	4.58	5.31	6.68	18.23	18.95	19.24	19.97	21.34
	6H	3.82	4.48	4.84	5.51	6.89	18.66	19.33	19.69	20.35	21.73
	8H	3.88	4.52	4.92	5.56	6.94	18.78	19.42	19.81	20.46	21.84
	12H	3.90	4.51	4.94	5.54	6.95	18.85	19.45	19.88	20.49	21.89
4H	2H	9.78	10.50	10.80	11.53	12.89	16.02	16.74	17.04	17.76	19.13
	3H	11.35	11.95	12.38	13.00	14.39	18.06	18.67	19.09	19.72	21.10
	4H	11.44	12.00	12.48	13.04	14.44	18.83	19.38	19.87	20.43	21.83
	6H	11.45	11.93	12.50	13.00	14.40	19.37	19.85	20.42	20.91	22.31
	8H	11.43	11.87	12.48	12.93	14.35	19.53	19.98	20.58	21.04	22.45
	12H	11.38	11.79	12.45	12.86	14.28	19.62	20.03	20.69	21.10	22.52
8H	4H	12.88	13.33	13.94	14.39	15.81	18.89	19.34	19.94	20.39	21.81
	6H	13.13	13.50	14.20	14.60	16.01	19.52	19.89	20.59	20.99	22.40
	8H	13.14	13.47	14.23	14.55	15.99	19.74	20.06	20.82	21.15	22.58
	12H	13.11	13.40	14.20	14.48	15.95	19.88	20.17	20.97	21.25	22.72
12H	4H	13.03	13.43	14.10	14.51	15.93	18.84	19.25	19.91	20.32	21.74
	6H	13.38	13.71	14.47	14.79	16.23	19.50	19.83	20.58	20.91	22.34
	8H	13.45	13.74	14.54	14.82	16.29	19.73	20.02	20.82	21.10	22.57