

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938081

Luminaire Tested: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P938081
REPORT IS A COMBINATION OF REPORTS P933591 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 22927.8 lumens
Efficiency: N/A
Efficacy: 118.7 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 193.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P938081
CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K

Luminous Intensity Polar Plot

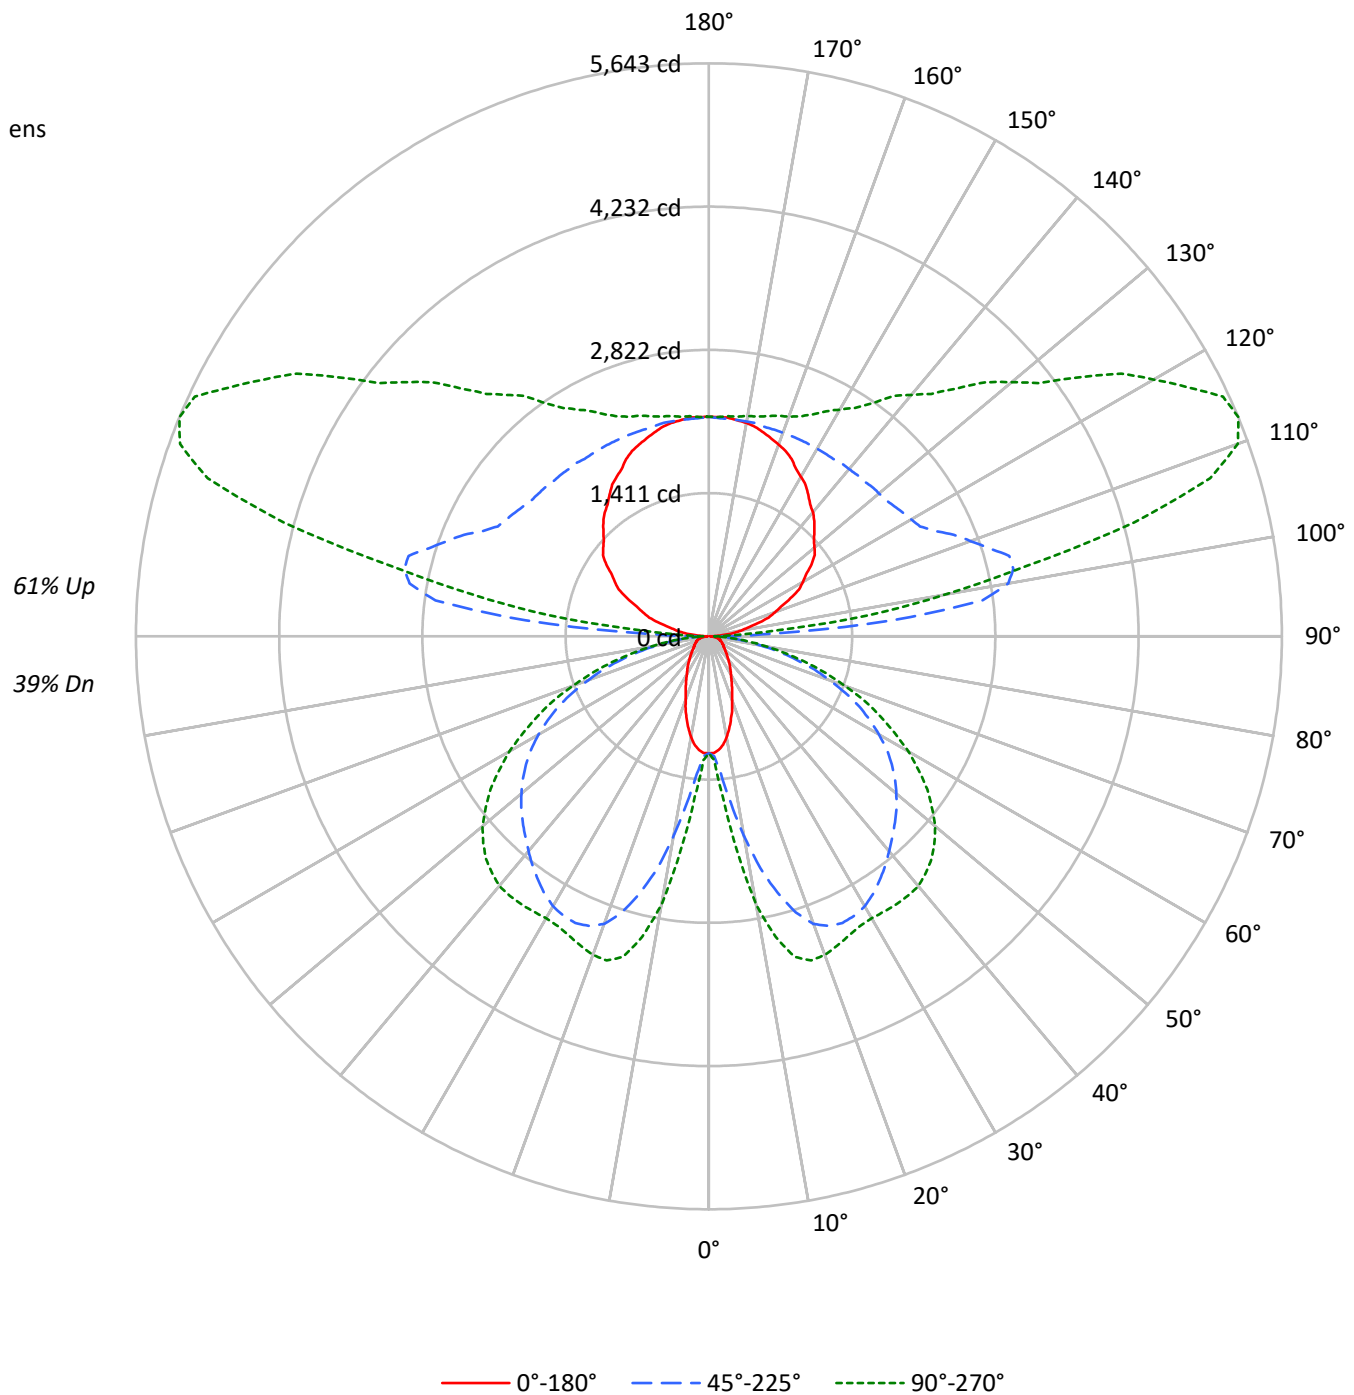



TEST NUMBER: P938081

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	39			39
1	95	90	86	83	86	82	79	76	67	65	62	53	51	50	40	39	38	32			32
2	86	78	72	67	78	71	66	61	58	54	51	46	43	41	35	33	31	26			26
3	78	68	61	55	71	62	56	51	51	46	42	40	37	34	30	28	26	21			21
4	71	60	52	46	64	55	48	42	45	40	35	35	32	29	27	24	22	18			18
5	65	53	45	39	59	49	41	36	40	34	30	31	27	24	24	21	19	15			15
6	60	47	39	33	54	43	36	31	35	30	26	28	24	21	21	18	16	13			13
7	55	43	35	29	50	39	32	27	32	26	23	25	21	18	19	16	14	11			11
8	51	38	31	25	46	35	28	23	29	24	20	23	19	16	18	15	13	10			10
9	47	35	27	22	43	32	25	21	26	21	17	21	17	14	16	13	11	9			9
10	44	32	25	20	40	29	23	18	24	19	16	19	15	13	15	12	10	8			8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3561	3561	3561
5°	3480	4117	4787
10°	3158	6003	7935
15°	2685	7844	9582
20°	2187	9093	9766
25°	1825	9517	9567
30°	1539	9580	9549
35°	1362	9423	9796
40°	1188	9219	10051
45°	1076	9070	10091
50°	988	8937	9924
55°	947	8741	9484
60°	971	8361	8789
65°	1012	7781	7835
70°	1080	6791	6619
75°	1202	5542	5166
80°	1322	3848	3480
85°	1199	2045	1782

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 10091 cd/sqm



TEST NUMBER: P938081

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.9	0.6
10°-20°	660.1	2.9
20°-30°	1154.5	5.0
30°-40°	1486.2	6.5
40°-50°	1660.1	7.2
50°-60°	1590.0	6.9
60°-70°	1260.1	5.5
70°-80°	740.9	3.2
80°-90°	214.1	0.9
90°-100°	1053.7	4.6
100°-110°	2770.2	12.1
110°-120°	2872.4	12.5
120°-130°	2304.0	10.0
130°-140°	1807.8	7.9
140°-150°	1387.6	6.1
150°-160°	999.3	4.4
160°-170°	611.4	2.7
170°-180°	206.6	0.9
0°-30°	1963.5	8.6
0°-40°	3449.8	15.0
0°-60°	6699.8	29.2
0°-90°	8914.9	38.9
90°-120°	6696.3	29.2
90°-150°	12195.7	53.2
90°-180°	14013.0	61.1
0°-180°	22927.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1151	1151	1151	1151	1151	
5°	1122	1203	1355	1533	1588	104
15°	840	1551	2614	3169	3269	234
25°	537	1758	3113	3250	3254	247
35°	363	1681	2932	3098	3221	227
45°	248	1340	2591	2969	3102	192
55°	178	851	2199	2554	2625	162
65°	141	452	1632	1836	1862	139
75°	104	278	896	985	988	109
85°	37	85	222	244	248	39
90°	14	41	110	55	55	14
95°	139	546	1815	936	637	155
105°	499	756	3062	4650	4338	529
115°	886	1076	2453	4893	5585	876
125°	1233	1383	2231	3770	4448	1095
135°	1470	1618	2162	3044	3451	1137
145°	1705	1814	2134	2597	2800	1068
155°	1927	1980	2134	2343	2411	885
165°	2079	2106	2134	2218	2246	587
175°	2162	2162	2149	2176	2176	205
180°	2162	2162	2162	2162	2162	



TEST NUMBER: P938081
 CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3
2.5°	1151.3	1151.3	1158.7	1162.5	1169.8	1173.6	1180.9	1188.3	1210.6	1214.3	1221.7
5°	1121.7	1136.5	1184.7	1203.2	1255.0	1325.3	1355.0	1403.1	1503.0	1532.6	1551.1
7.5°	1077.3	1110.6	1229.1	1258.7	1388.2	1573.3	1651.1	1754.7	1914.0	1991.7	2054.6
10°	1006.9	1077.3	1288.3	1358.6	1569.7	1851.0	1995.4	2139.8	2380.4	2487.7	2528.4
12.5°	929.2	1043.9	1351.2	1447.5	1751.1	2161.9	2335.9	2495.2	2769.1	2913.5	2935.7
15°	840.3	995.8	1410.4	1551.1	1943.6	2421.1	2613.6	2809.8	3065.3	3168.9	3194.8
17.5°	762.6	958.8	1466.0	1614.0	2091.6	2654.3	2850.6	3013.5	3220.7	3291.0	3309.6
20°	666.3	899.6	1503.0	1695.5	2247.1	2824.6	3013.5	3139.3	3279.9	3324.4	3331.8
22.5°	596.0	836.7	1525.2	1725.1	2350.8	2928.3	3087.4	3187.5	3283.7	3298.5	3302.2
25°	536.8	766.3	1521.5	1758.4	2439.6	2991.2	3113.4	3187.5	3242.9	3250.3	3250.3
27.5°	481.3	688.5	1506.7	1765.8	2506.3	3006.0	3102.3	3154.1	3180.0	3194.8	3194.8
30°	433.1	614.6	1469.6	1751.1	2535.9	2991.2	3068.9	3094.9	3120.8	3143.0	3154.1
32.5°	396.1	544.1	1414.2	1721.5	2539.5	2954.2	3009.7	3024.6	3061.6	3113.4	3131.9
35°	362.8	473.8	1351.2	1680.7	2517.3	2894.9	2932.0	2946.8	3020.8	3098.5	3124.5
37.5°	329.5	422.1	1269.8	1610.4	2484.1	2824.6	2850.6	2876.4	2991.2	3083.8	3113.4
40°	296.2	377.6	1173.6	1532.6	2432.2	2739.5	2761.7	2802.4	2954.2	3061.6	3091.2
42.5°	270.2	340.6	1069.9	1451.2	2365.5	2643.2	2676.6	2735.8	2909.8	3024.6	3057.8
45°	248.1	303.6	958.8	1340.1	2280.5	2543.3	2591.4	2672.8	2857.9	2969.0	2998.6
47.5°	225.8	277.7	844.1	1225.4	2187.9	2443.3	2506.3	2598.8	2787.6	2894.9	2920.9
50°	207.3	251.7	729.3	1103.2	2088.0	2335.9	2410.0	2506.3	2698.8	2798.7	2832.1
52.5°	192.5	229.5	622.0	981.1	1973.2	2224.9	2310.1	2410.0	2591.4	2687.7	2709.9
55°	177.7	211.0	529.4	851.4	1854.7	2106.5	2199.0	2295.2	2473.0	2554.4	2569.2
57.5°	170.3	196.2	451.7	729.3	1728.8	1973.2	2076.8	2165.7	2332.3	2395.1	2410.0
60°	159.2	185.1	392.4	625.6	1591.8	1847.3	1936.2	2025.0	2165.7	2217.5	2228.6
62.5°	148.0	177.7	348.0	525.7	1451.2	1699.2	1788.0	1869.5	1988.0	2025.0	2039.8
65°	140.7	170.3	314.7	451.7	1306.9	1543.7	1632.5	1703.0	1799.2	1836.2	1843.6
67.5°	133.3	162.9	288.8	388.7	1162.5	1388.2	1454.9	1521.5	1595.6	1632.5	1636.3
70°	122.2	155.5	266.6	344.3	1014.3	1210.6	1266.1	1336.5	1395.7	1414.2	1425.3
72.5°	114.8	144.4	251.7	310.9	862.5	1040.3	1092.1	1132.8	1184.7	1203.2	1203.2
75°	103.7	129.5	237.0	277.7	707.0	851.4	895.9	936.6	977.3	984.7	973.6
77.5°	92.6	114.8	203.6	233.2	551.6	673.8	710.8	733.0	766.3	773.7	777.5
80°	77.7	99.9	159.2	181.4	399.8	496.0	522.0	540.5	570.1	570.1	577.5
82.5°	59.2	77.7	114.8	129.5	270.2	340.6	362.8	373.9	392.4	392.4	392.4
85°	37.0	48.1	74.1	85.2	162.9	207.3	222.1	225.8	240.6	244.3	244.3
87.5°	18.5	25.9	48.1	51.8	85.2	107.3	107.3	114.8	114.8	111.1	107.3
90°	14.5	26.1	37.7	40.6	63.8	94.7	110.2	98.0	73.5	55.1	55.1
92.5°	58.0	156.6	255.4	280.0	393.7	545.2	620.9	544.1	390.7	275.6	264.7
95°	139.3	319.8	500.3	545.5	968.6	1532.8	1814.9	1619.5	1228.8	935.8	902.5
97.5°	240.8	400.0	559.4	599.2	1304.7	2245.4	2715.8	2592.3	2345.4	2160.2	2096.9
100°	319.1	463.6	608.0	644.2	1427.1	2471.0	2992.9	3002.0	3020.0	3033.5	2958.3
102.5°	385.9	520.7	655.4	689.1	1483.2	2541.9	3071.3	3228.6	3543.2	3779.2	3714.8
105°	499.0	613.2	727.3	755.9	1524.8	2549.9	3062.5	3415.2	4120.6	4649.6	4615.0
107.5°	615.1	721.5	827.9	854.5	1532.5	2436.5	2888.5	3380.4	4364.3	5102.3	5110.7
110°	693.5	789.5	885.6	909.6	1520.8	2335.8	2743.3	3293.4	4393.3	5218.4	5254.5



TEST NUMBER: P938081

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	770.4	861.9	953.4	976.3	1521.3	2248.0	2611.4	3174.3	4300.0	5144.4	5199.9
115°	886.4	970.8	1055.3	1076.4	1535.4	2147.3	2453.2	2995.5	4080.0	4893.4	4970.3
117.5°	1001.1	1077.7	1154.5	1173.7	1563.9	2084.2	2344.4	2833.8	3812.6	4546.6	4631.9
120°	1067.7	1139.9	1212.2	1230.3	1587.1	2063.0	2300.9	2748.1	3642.4	4313.1	4396.0
122.5°	1133.0	1205.9	1278.7	1297.0	1620.5	2051.9	2267.6	2670.2	3475.5	4079.5	4161.3
125°	1233.2	1299.6	1366.0	1382.6	1665.5	2042.7	2231.2	2573.3	3257.4	3770.5	3845.7
127.5°	1314.4	1381.5	1448.5	1465.3	1710.4	2037.3	2200.8	2494.4	3081.8	3522.4	3585.9
130°	1357.9	1430.1	1502.3	1520.4	1743.3	2040.6	2189.2	2450.6	2973.6	3365.8	3424.4
132.5°	1402.9	1475.1	1547.4	1565.4	1769.9	2042.7	2179.0	2413.1	2881.2	3232.3	3284.9
135°	1469.6	1535.4	1601.2	1617.6	1799.0	2040.8	2161.6	2357.7	2749.7	3043.7	3089.0
137.5°	1537.8	1602.9	1668.0	1684.3	1842.4	2053.3	2158.8	2324.4	2655.8	2904.4	2941.4
140°	1594.3	1654.3	1714.3	1729.3	1869.0	2055.4	2148.6	2291.7	2577.9	2792.7	2827.3
142.5°	1637.9	1693.3	1748.8	1762.6	1891.3	2062.8	2148.6	2274.3	2525.8	2714.4	2744.2
145°	1704.6	1753.0	1801.4	1813.5	1920.3	2062.8	2134.1	2236.9	2442.6	2596.8	2619.4
147.5°	1771.3	1818.4	1865.5	1877.2	1962.9	2077.0	2134.1	2215.0	2376.8	2498.2	2516.8
150°	1814.9	1857.4	1900.0	1910.7	1985.1	2084.4	2134.1	2202.5	2339.1	2441.6	2456.7
152.5°	1859.9	1892.1	1924.4	1932.4	1999.7	2089.3	2134.1	2192.5	2309.1	2396.6	2408.1
155°	1926.6	1950.5	1974.3	1980.3	2031.5	2099.9	2134.1	2180.5	2273.4	2342.9	2350.5
157.5°	1976.0	1999.1	2022.4	2028.2	2063.5	2110.6	2134.1	2170.1	2242.3	2296.5	2301.8
160°	2009.3	2027.3	2045.5	2049.9	2078.0	2115.4	2134.1	2165.0	2226.9	2273.4	2276.4
162.5°	2042.7	2056.2	2069.7	2073.1	2093.5	2120.6	2134.1	2160.2	2212.5	2251.6	2254.5
165°	2078.9	2091.1	2103.4	2106.5	2115.7	2127.9	2134.1	2152.8	2190.1	2218.2	2221.2
167.5°	2112.3	2118.1	2123.9	2125.3	2133.1	2143.4	2148.6	2160.8	2185.3	2203.7	2205.0
170°	2134.1	2139.9	2145.7	2147.1	2147.5	2148.2	2148.6	2160.8	2185.3	2203.7	2203.7
172.5°	2145.7	2147.0	2148.3	2148.6	2148.6	2148.6	2148.6	2158.3	2177.6	2192.1	2191.0
175°	2161.6	2161.6	2161.6	2161.6	2157.3	2151.5	2148.6	2154.7	2167.0	2176.1	2176.1
177.5°	2161.6	2161.6	2161.6	2161.6	2158.3	2153.7	2151.5	2156.3	2165.9	2173.2	2171.9
180°	2161.6	2161.6	2161.6	2161.6	2161.6	2161.6	2161.6	2161.6	2161.6	2161.6	2161.6



TEST NUMBER: P938081

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1151.3	<i>1151.3</i>
2.5°	1229.1	<i>1221.7</i>
5°	1580.8	<i>1588.2</i>
7.5°	2128.7	<i>2124.9</i>
10°	2647.0	<i>2680.2</i>
12.5°	3024.6	<i>3032.0</i>
15°	3254.1	<i>3268.9</i>
17.5°	3342.9	<i>3346.6</i>
20°	3346.6	<i>3339.2</i>
22.5°	3305.9	<i>3298.5</i>
25°	3257.8	<i>3254.1</i>
27.5°	3213.3	<i>3217.1</i>
30°	3194.8	<i>3206.0</i>
32.5°	3194.8	<i>3213.3</i>
35°	3202.2	<i>3220.7</i>
37.5°	3198.5	<i>3220.7</i>
40°	3183.7	<i>3209.6</i>
42.5°	3143.0	<i>3161.5</i>
45°	3080.1	<i>3102.3</i>
47.5°	2998.6	<i>3013.5</i>
50°	2894.9	<i>2909.8</i>
52.5°	2765.4	<i>2769.1</i>
55°	2609.9	<i>2624.7</i>
57.5°	2443.3	<i>2447.0</i>
60°	2258.2	<i>2269.3</i>
62.5°	2062.0	<i>2062.0</i>
65°	1854.7	<i>1862.1</i>
67.5°	1640.0	<i>1658.5</i>
70°	1421.5	<i>1425.3</i>
72.5°	1206.8	<i>1206.8</i>
75°	984.7	<i>988.5</i>
77.5°	773.7	<i>773.7</i>
80°	573.8	<i>577.5</i>
82.5°	396.1	<i>403.5</i>
85°	248.1	<i>248.1</i>
87.5°	114.8	<i>103.7</i>
90°	55.1	<i>55.1</i>
92.5°	220.8	<i>177.0</i>
95°	769.7	<i>636.9</i>
97.5°	1844.2	<i>1591.4</i>
100°	2657.1	<i>2356.0</i>
102.5°	3456.8	<i>3199.0</i>
105°	4476.4	<i>4337.8</i>
107.5°	5144.2	<i>5177.7</i>
110°	5398.9	<i>5543.3</i>



TEST NUMBER: P938081

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	5421.6	5643.4
115°	5277.8	5585.4
117.5°	4973.0	5314.1
120°	4727.3	5058.7
122.5°	4488.2	4815.1
125°	4146.9	4448.0
127.5°	3840.0	4094.0
130°	3659.1	3893.8
132.5°	3495.0	3705.2
135°	3270.1	3451.3
137.5°	3089.8	3238.1
140°	2966.0	3104.6
142.5°	2863.5	2982.7
145°	2709.6	2799.9
147.5°	2591.7	2666.5
150°	2517.4	2578.0
152.5°	2453.9	2499.7
155°	2380.9	2411.1
157.5°	2323.1	2344.4
160°	2288.7	2300.9
162.5°	2266.1	2277.7
165°	2233.5	2245.8
167.5°	2210.1	2215.3
170°	2203.7	2203.7
172.5°	2186.4	2181.9
175°	2176.1	2176.1
177.5°	2166.8	2161.6
180°	2161.6	2161.6



TEST NUMBER: P938081
 CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-12-5000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.31	5.11	5.35	6.16	7.58	17.50	18.30	18.54	19.35	20.77
	3H	5.01	5.73	6.06	6.79	8.23	19.34	20.06	20.39	21.12	22.56
	4H	5.31	5.99	6.37	7.05	8.49	19.99	20.67	21.05	21.73	23.17
	6H	5.55	6.18	6.63	7.25	8.70	20.42	21.05	21.49	22.11	23.57
	8H	5.62	6.22	6.70	7.30	8.75	20.54	21.14	21.62	22.22	23.67
	12H	5.64	6.20	6.72	7.28	8.75	20.61	21.18	21.69	22.25	23.73
4H	2H	11.53	12.21	12.60	13.27	14.71	17.77	18.45	18.84	19.51	20.95
	3H	13.09	13.66	14.16	14.75	16.20	19.81	20.38	20.89	21.47	22.93
	4H	13.18	13.70	14.26	14.78	16.26	20.58	21.10	21.66	22.18	23.66
	6H	13.19	13.64	14.28	14.74	16.21	21.12	21.57	22.21	22.67	24.15
	8H	13.16	13.58	14.25	14.68	16.17	21.29	21.70	22.38	22.80	24.29
	12H	13.11	13.50	14.22	14.60	16.10	21.38	21.76	22.49	22.87	24.36
8H	4H	14.62	15.04	15.71	16.14	17.63	20.64	21.06	21.73	22.15	23.64
	6H	14.86	15.21	15.98	16.35	17.83	21.27	21.61	22.38	22.75	24.24
	8H	14.88	15.18	16.00	16.30	17.81	21.49	21.79	22.61	22.91	24.42
	12H	14.84	15.11	15.97	16.23	17.77	21.63	21.90	22.76	23.02	24.56
12H	4H	14.76	15.14	15.87	16.25	17.75	20.59	20.97	21.70	22.07	23.57
	6H	15.12	15.43	16.24	16.54	18.05	21.25	21.55	22.37	22.67	24.18
	8H	15.19	15.46	16.31	16.57	18.11	21.48	21.75	22.60	22.86	24.40