

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938096

Luminaire Tested: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P938096  
REPORT IS A COMBINATION OF REPORTS P933615 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 15285.9 lumens  
Efficiency: N/A  
Efficacy: 118.7 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 128.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P938096  
CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K

### Luminous Intensity Polar Plot

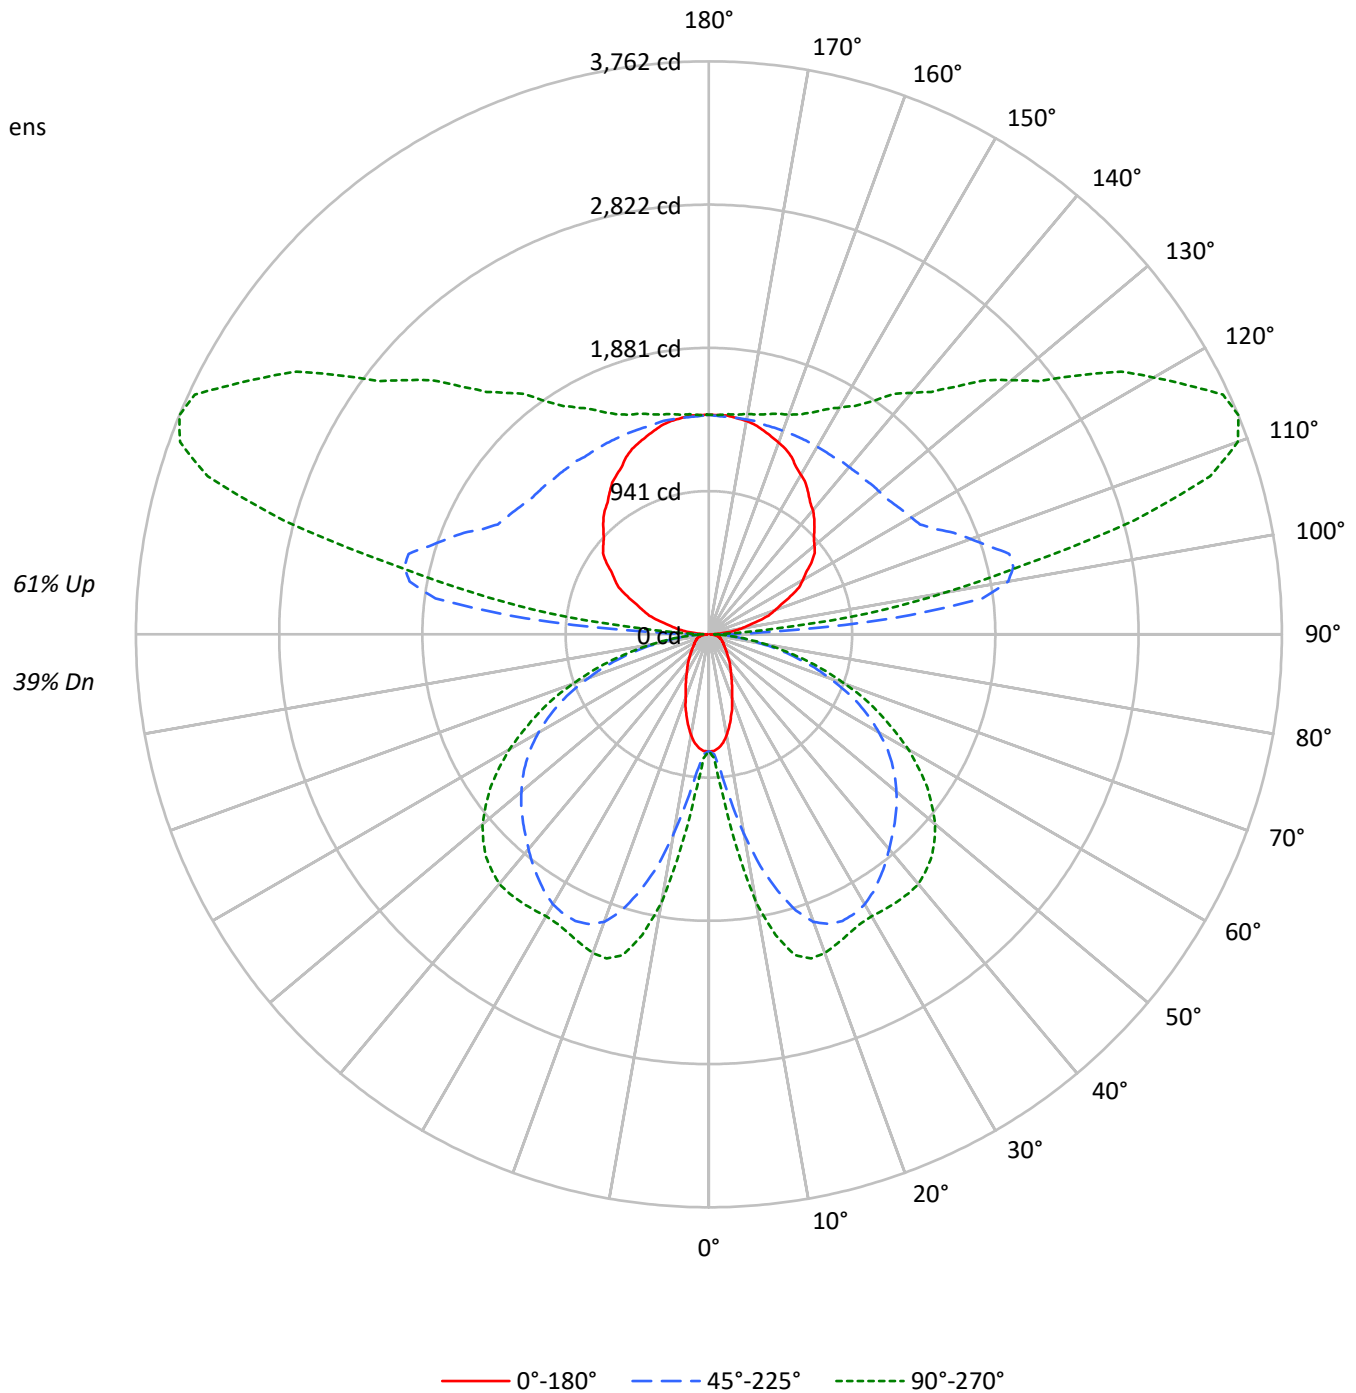



TEST NUMBER: P938096

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	39			39
1	95	90	86	83	86	82	79	76	67	65	62	53	51	50	40	39	38	32			32
2	86	78	72	67	78	71	66	61	58	54	51	46	43	41	35	33	31	26			26
3	78	68	61	55	71	62	56	51	51	46	42	40	37	34	30	28	26	21			21
4	71	60	52	46	64	55	48	42	45	40	35	35	32	29	27	24	22	18			18
5	65	53	45	39	59	49	41	36	40	34	30	31	27	24	24	21	19	15			15
6	60	47	39	33	54	43	36	31	35	30	26	28	24	21	21	18	16	13			13
7	55	43	35	29	50	39	32	27	32	26	23	25	21	18	19	16	14	11			11
8	51	38	31	25	46	35	28	23	29	24	20	23	19	16	18	15	13	10			10
9	47	35	27	22	43	32	25	21	26	21	17	21	17	14	16	13	11	9			9
10	44	32	25	20	40	29	23	18	24	19	16	19	15	13	15	12	10	8			8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3562	3562	3562
5°	3479	4116	4787
10°	3156	6000	7936
15°	2682	7839	9583
20°	2184	9084	9767
25°	1822	9506	9568
30°	1536	9567	9551
35°	1358	9408	9797
40°	1183	9201	10052
45°	1072	9050	10092
50°	983	8914	9924
55°	941	8715	9485
60°	964	8332	8790
65°	1003	7750	7836
70°	1068	6759	6620
75°	1183	5511	5166
80°	1292	3822	3481
85°	1150	2028	1782

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 10092 cd/sqm



TEST NUMBER: P938096

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	99.3	0.6
10°-20°	440.1	2.9
20°-30°	769.8	5.0
30°-40°	990.9	6.5
40°-50°	1106.8	7.2
50°-60°	1060.1	6.9
60°-70°	840.1	5.5
70°-80°	494.0	3.2
80°-90°	142.7	0.9
90°-100°	702.5	4.6
100°-110°	1846.8	12.1
110°-120°	1914.9	12.5
120°-130°	1536.0	10.0
130°-140°	1205.2	7.9
140°-150°	925.0	6.1
150°-160°	666.2	4.4
160°-170°	407.6	2.7
170°-180°	137.7	0.9
0°-30°	1309.2	8.6
0°-40°	2300.1	15.0
0°-60°	4467.0	29.2
0°-90°	5943.9	38.9
90°-120°	4464.2	29.2
90°-150°	8130.5	53.2
90°-180°	9342.0	61.1
0°-180°	15285.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	768	768	768	768	768	
5°	748	802	903	1022	1059	69
15°	560	1034	1743	2113	2180	156
25°	358	1172	2076	2167	2170	165
35°	242	1121	1955	2066	2147	151
45°	165	894	1728	1980	2068	128
55°	118	568	1466	1703	1750	108
65°	94	301	1088	1224	1242	93
75°	69	185	597	657	659	72
85°	25	57	148	163	165	26
90°	10	27	74	37	37	10
95°	93	364	1210	624	425	103
105°	333	504	2042	3100	2892	353
115°	591	718	1636	3262	3724	584
125°	822	922	1488	2514	2965	730
135°	980	1078	1441	2029	2301	758
145°	1136	1209	1423	1731	1867	712
155°	1284	1320	1423	1562	1607	590
165°	1386	1404	1423	1479	1497	391
175°	1441	1441	1432	1451	1451	137
180°	1441	1441	1441	1441	1441	



TEST NUMBER: P938096

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7
2.5°	767.7	767.7	772.6	775.0	780.0	782.4	787.4	792.3	807.2	809.6	814.5
5°	747.9	757.8	789.9	802.2	836.8	883.7	903.4	935.5	1002.1	1021.9	1034.2
7.5°	718.2	740.5	819.5	839.2	925.6	1049.0	1100.8	1169.9	1276.1	1328.0	1369.9
10°	671.4	718.2	859.0	905.9	1046.5	1234.1	1330.4	1426.7	1587.1	1658.7	1685.8
12.5°	619.5	696.0	900.9	965.1	1167.5	1441.4	1557.4	1663.6	1846.2	1942.5	1957.3
15°	560.3	664.0	940.4	1034.2	1295.8	1614.2	1742.6	1873.4	2043.7	2112.8	2130.1
17.5°	508.5	639.3	977.4	1076.2	1394.6	1769.7	1900.6	2009.1	2147.4	2194.2	2206.7
20°	444.3	599.8	1002.1	1130.4	1498.2	1883.3	2009.1	2093.1	2186.9	2216.5	2221.4
22.5°	397.4	557.8	1016.9	1150.2	1567.3	1952.4	2058.5	2125.1	2189.4	2199.2	2201.7
25°	357.9	510.9	1014.4	1172.5	1626.6	1994.4	2075.8	2125.1	2162.2	2167.2	2167.2
27.5°	320.8	459.1	1004.6	1177.4	1671.0	2004.3	2068.4	2103.0	2120.3	2130.1	2130.1
30°	288.8	409.7	979.9	1167.5	1690.7	1994.4	2046.2	2063.5	2080.8	2095.5	2103.0
32.5°	264.1	362.9	942.9	1147.7	1693.2	1969.7	2006.7	2016.6	2041.3	2075.8	2088.1
35°	241.9	316.0	900.9	1120.6	1678.4	1930.2	1954.9	1964.8	2014.1	2065.9	2083.2
37.5°	219.7	281.4	846.6	1073.7	1656.2	1883.3	1900.6	1917.9	1994.4	2056.0	2075.8
40°	197.4	251.8	782.4	1021.9	1621.6	1826.5	1841.3	1868.5	1969.7	2041.3	2061.0
42.5°	180.2	227.1	713.3	967.5	1577.2	1762.4	1784.6	1824.0	1940.0	2016.6	2038.8
45°	165.4	202.4	639.3	893.5	1520.5	1695.7	1727.8	1782.1	1905.5	1979.5	1999.3
47.5°	150.6	185.1	562.7	817.0	1458.7	1629.1	1671.0	1732.8	1858.6	1930.2	1947.5
50°	138.2	167.8	486.2	735.5	1392.1	1557.4	1606.9	1671.0	1799.4	1866.0	1888.2
52.5°	128.3	153.0	414.7	654.1	1315.5	1483.4	1540.2	1606.9	1727.8	1792.0	1806.7
55°	118.4	140.7	353.0	567.7	1236.6	1404.5	1466.1	1530.4	1648.8	1703.1	1713.0
57.5°	113.6	130.9	301.1	486.2	1152.6	1315.5	1384.7	1444.0	1555.0	1597.0	1606.9
60°	106.1	123.4	261.6	417.1	1061.4	1231.7	1290.9	1350.1	1444.0	1478.5	1485.9
62.5°	98.7	118.4	232.0	350.5	967.5	1132.9	1192.2	1246.5	1325.4	1350.1	1360.0
65°	93.8	113.6	209.8	301.1	871.3	1029.3	1088.5	1135.4	1199.5	1224.3	1229.2
67.5°	88.8	108.6	192.5	259.2	775.0	925.6	970.1	1014.4	1063.8	1088.5	1091.0
70°	81.4	103.7	177.7	229.6	676.3	807.2	844.1	891.0	930.5	942.9	950.3
72.5°	76.5	96.3	167.8	207.3	575.1	693.6	728.1	755.3	789.9	802.2	802.2
75°	69.1	86.4	157.9	185.1	471.5	567.7	597.3	624.5	651.7	656.6	649.1
77.5°	61.7	76.5	135.7	155.5	367.8	449.3	473.9	488.7	510.9	515.8	518.4
80°	51.8	66.7	106.1	121.0	266.6	330.7	348.0	360.3	380.1	380.1	385.1
82.5°	39.5	51.8	76.5	86.4	180.2	227.1	241.9	249.3	261.6	261.6	261.6
85°	24.7	32.1	49.4	56.8	108.6	138.2	148.1	150.6	160.5	162.9	162.9
87.5°	12.3	17.3	32.1	34.6	56.8	71.5	71.5	76.5	76.5	74.1	71.5
90°	9.7	17.5	25.1	27.1	42.6	63.2	73.5	65.3	48.9	36.7	36.7
92.5°	38.7	104.4	170.3	186.7	262.5	363.4	413.9	362.8	260.5	183.7	176.4
95°	92.8	213.2	333.6	363.7	645.8	1021.9	1209.9	1079.7	819.2	623.8	601.7
97.5°	160.6	266.8	372.9	399.5	869.8	1497.0	1810.6	1728.3	1563.6	1440.1	1398.0
100°	212.8	309.1	405.4	429.5	951.4	1647.3	1995.3	2001.3	2013.3	2022.4	1972.2
102.5°	257.2	347.1	436.9	459.4	988.8	1694.6	2047.5	2152.4	2362.2	2519.5	2476.5
105°	332.7	408.8	484.8	503.9	1016.5	1700.0	2041.7	2276.8	2747.1	3099.8	3076.7
107.5°	410.1	481.0	551.9	569.6	1021.6	1624.3	1925.6	2253.6	2909.6	3401.5	3407.1
110°	462.3	526.4	590.5	606.4	1014.0	1557.3	1829.0	2195.6	2928.9	3478.9	3503.0



TEST NUMBER: P938096

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	513.6	574.6	635.7	650.9	1014.2	1498.7	1740.9	2116.2	2866.6	3429.6	3466.5
115°	590.9	647.3	703.5	717.6	1023.6	1431.5	1635.5	1997.0	2720.0	3262.3	3313.6
117.5°	667.3	718.5	769.6	782.4	1042.6	1389.5	1563.0	1889.2	2541.7	3031.1	3088.0
120°	711.8	760.0	808.1	820.1	1058.0	1375.3	1533.9	1832.0	2428.2	2875.4	2930.6
122.5°	755.3	803.9	852.5	864.6	1080.3	1367.8	1511.7	1780.1	2317.1	2719.7	2774.2
125°	822.1	866.4	910.6	921.7	1110.2	1361.8	1487.5	1715.6	2171.6	2513.7	2563.8
127.5°	876.3	921.0	965.7	976.9	1140.3	1358.2	1467.2	1663.0	2054.6	2348.3	2390.6
130°	905.2	953.4	1001.5	1013.6	1162.2	1360.4	1459.5	1633.8	1982.4	2243.8	2283.0
132.5°	935.2	983.4	1031.5	1043.6	1179.9	1361.8	1452.7	1608.7	1920.8	2154.8	2189.9
135°	979.8	1023.6	1067.5	1078.4	1199.3	1360.5	1441.1	1571.7	1833.1	2029.1	2059.3
137.5°	1025.2	1068.6	1112.0	1122.9	1228.3	1368.9	1439.1	1549.6	1770.6	1936.3	1961.0
140°	1062.9	1102.9	1142.8	1152.8	1246.0	1370.3	1432.4	1527.8	1718.7	1861.8	1884.9
142.5°	1091.9	1128.9	1165.8	1175.1	1260.8	1375.2	1432.4	1516.2	1683.8	1809.5	1829.4
145°	1136.4	1168.6	1200.9	1209.0	1280.2	1375.2	1422.7	1491.2	1628.4	1731.3	1746.3
147.5°	1180.9	1212.3	1243.7	1251.6	1308.6	1384.7	1422.7	1476.7	1584.5	1665.5	1677.9
150°	1209.9	1238.3	1266.7	1273.8	1323.4	1389.6	1422.7	1468.2	1559.4	1627.8	1637.9
152.5°	1239.9	1261.4	1282.8	1288.3	1333.1	1392.8	1422.7	1461.6	1539.4	1597.8	1605.5
155°	1284.4	1300.3	1316.2	1320.2	1354.4	1399.9	1422.7	1453.7	1515.6	1562.0	1567.1
157.5°	1317.3	1332.7	1348.2	1352.1	1375.6	1407.0	1422.7	1446.8	1494.9	1531.0	1534.6
160°	1339.5	1351.6	1363.6	1366.6	1385.3	1410.2	1422.7	1443.3	1484.6	1515.5	1517.6
162.5°	1361.8	1370.7	1379.8	1382.0	1395.6	1413.6	1422.7	1440.0	1474.9	1501.0	1503.0
165°	1386.0	1394.2	1402.3	1404.4	1410.4	1418.6	1422.7	1435.2	1460.1	1478.8	1480.9
167.5°	1408.2	1412.0	1415.9	1416.9	1422.0	1428.9	1432.4	1440.5	1456.9	1469.1	1469.9
170°	1422.7	1426.6	1430.5	1431.4	1431.7	1432.2	1432.4	1440.5	1456.9	1469.1	1469.1
172.5°	1430.4	1431.3	1432.2	1432.4	1432.4	1432.4	1432.4	1438.8	1451.7	1461.4	1460.7
175°	1441.1	1441.1	1441.1	1441.1	1438.2	1434.3	1432.4	1436.5	1444.6	1450.8	1450.8
177.5°	1441.1	1441.1	1441.1	1441.1	1438.8	1435.8	1434.3	1437.5	1444.0	1448.8	1448.0
180°	1441.1	1441.1	1441.1	1441.1	1441.1	1441.1	1441.1	1441.1	1441.1	1441.1	1441.1



TEST NUMBER: P938096

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	767.7	767.7
2.5°	819.5	814.5
5°	1053.9	1058.9
7.5°	1419.2	1416.8
10°	1764.8	1787.0
12.5°	2016.6	2021.5
15°	2169.6	2179.5
17.5°	2228.8	2231.3
20°	2231.3	2226.4
22.5°	2204.1	2199.2
25°	2172.1	2169.6
27.5°	2142.4	2144.9
30°	2130.1	2137.6
32.5°	2130.1	2142.4
35°	2135.0	2147.4
37.5°	2132.6	2147.4
40°	2122.7	2140.0
42.5°	2095.5	2107.9
45°	2053.6	2068.4
47.5°	1999.3	2009.1
50°	1930.2	1940.0
52.5°	1843.8	1846.2
55°	1740.1	1750.0
57.5°	1629.1	1631.5
60°	1505.6	1513.1
62.5°	1374.8	1374.8
65°	1236.6	1241.6
67.5°	1093.4	1105.8
70°	947.8	950.3
72.5°	804.6	804.6
75°	656.6	659.0
77.5°	515.8	515.8
80°	382.6	385.1
82.5°	264.1	269.1
85°	165.4	165.4
87.5°	76.5	69.1
90°	36.7	36.7
92.5°	147.2	118.0
95°	513.1	424.6
97.5°	1229.5	1061.0
100°	1771.4	1570.7
102.5°	2304.6	2132.6
105°	2984.2	2891.9
107.5°	3429.5	3451.8
110°	3599.3	3695.6





TEST NUMBER: P938096

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	3614.4	3762.2
115°	3518.6	3723.6
117.5°	3315.3	3542.8
120°	3151.6	3372.5
122.5°	2992.2	3210.1
125°	2764.6	2965.4
127.5°	2560.0	2729.3
130°	2439.4	2595.9
132.5°	2330.0	2470.1
135°	2180.1	2300.9
137.5°	2059.8	2158.8
140°	1977.4	2069.7
142.5°	1908.9	1988.5
145°	1806.4	1866.6
147.5°	1727.8	1777.7
150°	1678.3	1718.7
152.5°	1635.9	1666.4
155°	1587.2	1607.4
157.5°	1548.8	1563.0
160°	1525.7	1533.9
162.5°	1510.7	1518.5
165°	1489.0	1497.2
167.5°	1473.4	1476.8
170°	1469.1	1469.1
172.5°	1457.6	1454.6
175°	1450.8	1450.8
177.5°	1444.5	1441.1
180°	1441.1	1441.1



TEST NUMBER: P938096  
 CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-STD-W-8-5000K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.31	5.10	5.35	6.16	7.57	17.49	18.28	18.53	19.33	20.75
	3H	5.01	5.72	6.06	6.78	8.22	19.32	20.04	20.37	21.10	22.53
	4H	5.30	5.98	6.37	7.04	8.49	19.96	20.64	21.02	21.70	23.15
	6H	5.55	6.18	6.62	7.24	8.70	20.39	21.02	21.46	22.08	23.54
	8H	5.62	6.21	6.69	7.29	8.75	20.51	21.11	21.59	22.19	23.64
	12H	5.63	6.20	6.71	7.27	8.75	20.58	21.14	21.66	22.22	23.69
4H	2H	11.52	12.19	12.58	13.26	14.70	17.75	18.43	18.82	19.49	20.94
	3H	13.08	13.65	14.15	14.73	16.19	19.79	20.36	20.87	21.45	22.91
	4H	13.17	13.69	14.25	14.77	16.25	20.56	21.08	21.64	22.16	23.64
	6H	13.18	13.62	14.27	14.73	16.20	21.09	21.54	22.18	22.64	24.12
	8H	13.15	13.57	14.24	14.67	16.15	21.25	21.67	22.34	22.77	24.26
	12H	13.10	13.48	14.21	14.59	16.09	21.34	21.72	22.45	22.83	24.33
8H	4H	14.61	15.03	15.70	16.12	17.61	20.61	21.03	21.70	22.13	23.61
	6H	14.85	15.19	15.96	16.33	17.82	21.24	21.59	22.35	22.72	24.21
	8H	14.86	15.17	15.98	16.29	17.79	21.46	21.76	22.58	22.88	24.38
	12H	14.83	15.10	15.95	16.21	17.75	21.60	21.87	22.72	22.98	24.52
12H	4H	14.75	15.13	15.86	16.24	17.73	20.56	20.94	21.67	22.05	23.54
	6H	15.11	15.41	16.23	16.53	18.03	21.22	21.53	22.34	22.64	24.15
	8H	15.17	15.44	16.30	16.55	18.10	21.45	21.71	22.57	22.83	24.37