

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937299

Luminaire Tested: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937299
REPORT IS A COMBINATION OF REPORTS P933511 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8974.9 lumens
Efficiency: N/A
Efficacy: 116.9 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 76.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937299
CATALOG NUMBER: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6

Luminous Intensity Polar Plot

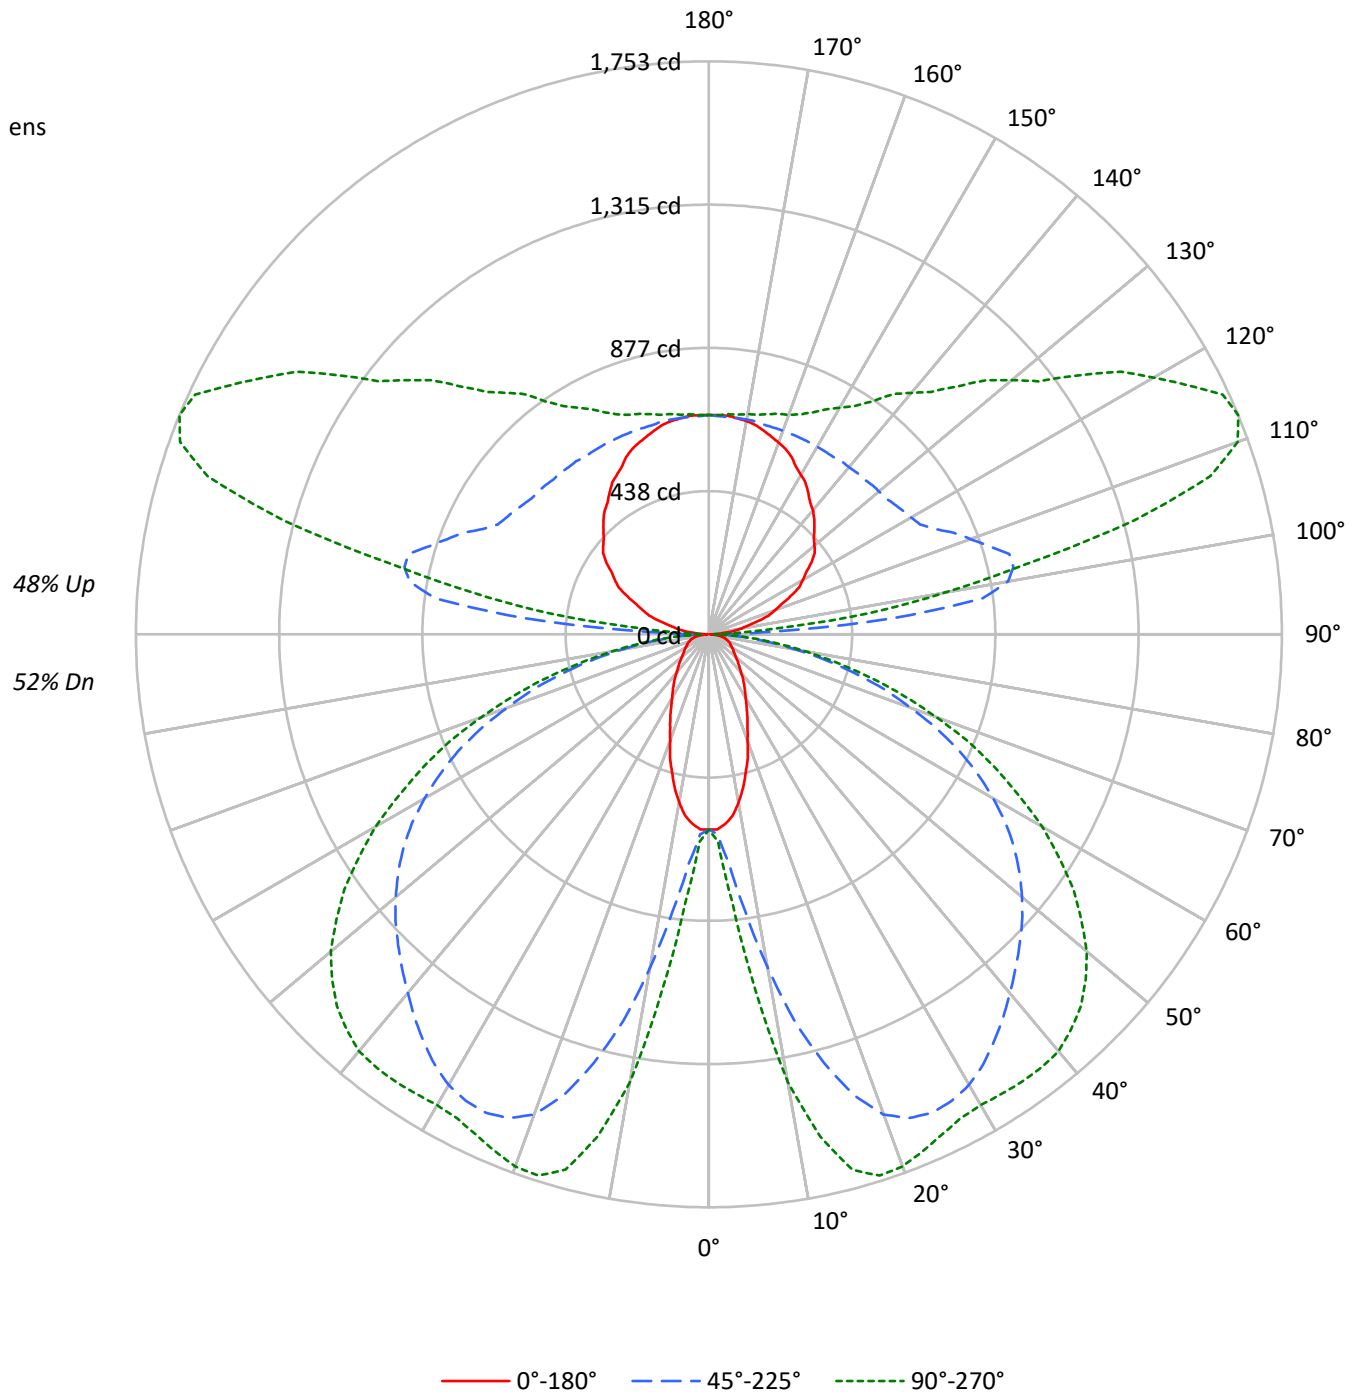



TEST NUMBER: P937299

CATALOG NUMBER: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	58	58	58	52
1	98	93	89	85	90	86	82	79	73	70	68	61	59	57	50	49	47	50	49	47	42
2	88	80	74	69	81	74	69	64	63	59	55	53	50	47	43	41	39	43	41	39	34
3	80	70	62	56	74	65	58	53	55	50	46	46	42	39	38	35	32	38	35	32	28
4	73	62	53	47	67	57	50	44	49	43	38	41	36	33	33	30	27	33	30	27	24
5	67	55	46	40	61	51	43	37	43	37	33	36	32	28	30	26	23	30	26	23	20
6	61	49	40	34	56	45	38	32	39	33	28	32	28	24	27	23	20	27	23	20	17
7	56	44	35	30	52	41	33	28	35	29	24	29	25	21	24	20	18	24	20	18	15
8	52	39	31	26	48	37	29	24	31	26	21	27	22	19	22	18	16	22	18	16	13
9	49	36	28	23	45	33	26	22	29	23	19	24	20	16	20	17	14	20	17	14	12
10	45	33	25	20	42	31	24	19	26	21	17	22	18	15	19	15	12	19	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3694	3694	3694
5°	3608	4269	4966
10°	3271	6222	8233
15°	2780	8126	9941
20°	2261	9415	10132
25°	1886	9849	9926
30°	1590	9909	9907
35°	1405	9742	10163
40°	1223	9526	10428
45°	1107	9366	10468
50°	1015	9222	10295
55°	971	9013	9839
60°	993	8613	9118
65°	1032	8007	8128
70°	1097	6979	6866
75°	1211	5684	5358
80°	1312	3937	3611
85°	1145	2085	1849

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 10468 cd/sqm



TEST NUMBER: P937299

CATALOG NUMBER: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.3	0.9
10°-20°	342.4	3.8
20°-30°	598.9	6.7
30°-40°	771.0	8.6
40°-50°	861.1	9.6
50°-60°	824.8	9.2
60°-70°	653.6	7.3
70°-80°	384.4	4.3
80°-90°	109.3	1.2
90°-100°	327.2	3.6
100°-110°	860.4	9.6
110°-120°	892.1	9.9
120°-130°	715.6	8.0
130°-140°	561.5	6.3
140°-150°	431.0	4.8
150°-160°	310.4	3.5
160°-170°	189.9	2.1
170°-180°	64.2	0.7
0°-30°	1018.6	11.3
0°-40°	1789.5	19.9
0°-60°	3475.4	38.7
0°-90°	4622.8	51.5
90°-120°	2079.7	23.2
90°-150°	3787.7	42.2
90°-180°	4352.0	48.5
0°-180°	8974.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	597	597	597	597	597	
5°	582	624	703	795	824	54
15°	436	805	1356	1644	1696	121
25°	278	912	1615	1686	1688	128
35°	188	872	1521	1607	1671	118
45°	129	695	1344	1540	1609	100
55°	92	442	1141	1325	1362	84
65°	73	234	847	952	966	72
75°	54	144	465	511	513	56
85°	19	44	115	127	129	20
90°	4	13	34	17	17	5
95°	43	169	564	291	198	48
105°	155	235	951	1444	1347	164
115°	275	334	762	1520	1735	272
125°	383	429	693	1171	1382	340
135°	456	502	671	945	1072	353
145°	530	563	663	806	870	332
155°	598	615	663	728	749	275
165°	646	654	663	689	698	182
175°	671	671	667	676	676	64
180°	671	671	671	671	671	



TEST NUMBER: P937299

CATALOG NUMBER: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	597.2	597.2	597.2	597.2	597.2	597.2	597.2	597.2	597.2	597.2	597.2
2.5°	597.2	597.2	601.1	603.0	606.8	608.7	612.6	616.5	627.9	629.8	633.7
5°	581.9	589.5	614.5	624.1	651.0	687.5	702.8	727.8	779.7	795.1	804.7
7.5°	558.8	576.1	637.6	652.9	720.2	816.2	856.5	910.3	992.8	1033.1	1065.8
10°	522.3	558.8	668.3	704.8	814.3	960.2	1035.1	1110.0	1234.8	1290.5	1311.6
12.5°	482.0	541.6	701.0	750.9	908.3	1121.5	1211.7	1294.3	1436.4	1511.3	1522.9
15°	436.0	516.6	731.7	804.7	1008.1	1255.9	1355.8	1457.6	1590.0	1643.8	1657.3
17.5°	395.6	497.4	760.5	837.3	1085.0	1376.9	1478.7	1563.2	1670.7	1707.2	1716.8
20°	345.6	466.7	779.7	879.6	1165.7	1465.2	1563.2	1628.5	1701.5	1724.5	1728.3
22.5°	309.2	434.0	791.2	894.9	1219.4	1519.0	1601.6	1653.4	1703.4	1711.1	1713.0
25°	278.5	397.5	789.3	912.2	1265.5	1551.7	1615.0	1653.4	1682.3	1686.1	1686.1
27.5°	249.6	357.2	781.6	916.0	1300.1	1559.3	1609.2	1636.2	1649.6	1657.3	1657.3
30°	224.7	318.8	762.4	908.3	1315.4	1551.7	1592.0	1605.4	1618.9	1630.3	1636.2
32.5°	205.5	282.3	733.5	892.9	1317.4	1532.5	1561.3	1568.9	1588.1	1615.0	1624.6
35°	188.2	245.8	701.0	871.8	1305.8	1501.8	1520.9	1528.6	1567.0	1607.4	1620.7
37.5°	170.9	218.9	658.7	835.4	1288.6	1465.2	1478.7	1492.2	1551.7	1599.6	1615.0
40°	153.6	195.8	608.7	795.1	1261.6	1421.0	1432.6	1453.7	1532.5	1588.1	1603.5
42.5°	140.2	176.6	554.9	752.8	1227.1	1371.1	1388.4	1419.1	1509.4	1568.9	1586.3
45°	128.7	157.5	497.4	695.2	1183.0	1319.3	1344.3	1386.5	1482.5	1540.1	1555.5
47.5°	117.2	144.0	437.9	635.7	1134.9	1267.5	1300.1	1348.1	1446.0	1501.8	1515.1
50°	107.6	130.6	378.3	572.3	1083.1	1211.7	1250.2	1300.1	1399.9	1451.8	1469.1
52.5°	99.9	119.1	322.6	508.9	1023.6	1154.2	1198.3	1250.2	1344.3	1394.2	1405.7
55°	92.2	109.5	274.6	441.7	962.1	1092.6	1140.7	1190.6	1282.8	1325.0	1332.8
57.5°	88.4	101.7	234.3	378.3	896.8	1023.6	1077.3	1123.5	1209.8	1242.5	1250.2
60°	82.6	96.0	203.6	324.5	825.8	958.2	1004.4	1050.4	1123.5	1150.3	1156.0
62.5°	76.8	92.2	180.5	272.7	752.8	881.4	927.5	969.8	1031.2	1050.4	1058.1
65°	73.0	88.4	163.3	234.3	677.9	800.8	846.9	883.3	933.3	952.5	956.3
67.5°	69.1	84.5	149.8	201.6	603.0	720.2	754.7	789.3	827.7	846.9	848.8
70°	63.4	80.6	138.3	178.6	526.2	627.9	656.8	693.2	723.9	733.5	739.3
72.5°	59.5	74.9	130.6	161.3	447.5	539.6	566.5	587.6	614.5	624.1	624.1
75°	53.8	67.2	122.9	144.0	366.8	441.7	464.7	485.9	507.0	510.9	505.0
77.5°	48.0	59.5	105.6	121.0	286.1	349.5	368.7	380.2	397.5	401.4	403.3
80°	40.3	51.8	82.6	94.1	207.4	257.4	270.7	280.3	295.7	295.7	299.6
82.5°	30.7	40.3	59.5	67.2	140.2	176.6	188.2	194.0	203.6	203.6	203.6
85°	19.2	25.0	38.4	44.2	84.5	107.6	115.2	117.2	124.8	126.7	126.7
87.5°	9.6	13.5	25.0	26.8	44.2	55.7	55.7	59.5	59.5	57.7	55.7
90°	4.5	8.0	11.7	12.6	19.8	29.4	34.2	30.4	22.9	17.2	17.2
92.5°	18.0	48.6	79.3	86.9	122.2	169.3	192.8	169.0	121.3	85.6	82.2
95°	43.2	99.3	155.3	169.4	300.8	476.1	563.7	503.0	381.6	290.6	280.3
97.5°	74.8	124.2	173.6	186.0	405.2	697.4	843.5	805.1	728.5	670.9	651.3
100°	99.1	144.0	188.9	200.1	443.2	767.4	929.6	932.4	938.0	942.2	918.8
102.5°	119.9	161.7	203.6	214.1	460.7	789.4	953.9	1002.7	1100.5	1173.7	1153.7
105°	155.0	190.5	226.0	234.8	473.6	792.0	951.2	1060.7	1279.8	1444.1	1433.3
107.5°	191.1	224.1	257.2	265.4	476.0	756.7	897.1	1049.9	1355.5	1584.7	1587.3
110°	215.4	245.3	275.0	282.5	472.3	725.5	852.0	1022.9	1364.5	1620.7	1632.0



TEST NUMBER: P937299

CATALOG NUMBER: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	239.2	267.6	296.1	303.2	472.5	698.2	811.1	985.9	1335.5	1597.7	1614.9
115°	275.3	301.6	327.7	334.3	476.8	666.9	761.9	930.3	1267.2	1519.8	1543.6
117.5°	310.9	334.7	358.5	364.5	485.8	647.3	728.1	880.1	1184.1	1412.1	1438.6
120°	331.6	354.1	376.5	382.1	492.9	640.7	714.6	853.5	1131.2	1339.5	1365.3
122.5°	351.9	374.5	397.2	402.8	503.3	637.3	704.3	829.3	1079.4	1267.0	1292.4
125°	382.9	403.6	424.2	429.4	517.3	634.4	693.0	799.2	1011.7	1171.0	1194.4
127.5°	408.2	429.1	449.8	455.0	531.2	632.8	683.5	774.7	957.2	1094.0	1113.8
130°	421.7	444.2	466.6	472.2	541.5	633.8	679.9	761.1	923.6	1045.4	1063.6
132.5°	435.7	458.1	480.5	486.1	549.7	634.4	676.7	749.4	894.9	1003.9	1020.2
135°	456.4	476.8	497.3	502.4	558.7	633.8	671.3	732.2	854.0	945.3	959.3
137.5°	477.6	497.8	518.0	523.1	572.2	637.7	670.5	721.9	824.8	902.0	913.6
140°	495.2	513.8	532.5	537.1	580.5	638.4	667.3	711.7	800.7	867.4	878.1
142.5°	508.7	526.0	543.2	547.5	587.4	640.6	667.3	706.3	784.4	843.0	852.3
145°	529.5	544.5	559.4	563.2	596.4	640.7	662.8	694.8	758.6	806.5	813.5
147.5°	550.1	564.7	579.4	583.0	609.6	645.1	662.8	687.9	738.2	775.9	781.7
150°	563.7	576.8	590.1	593.4	616.6	647.4	662.8	684.0	726.5	758.3	763.1
152.5°	577.6	587.7	597.7	600.2	621.0	648.8	662.8	680.9	717.2	744.4	748.0
155°	598.4	605.7	613.2	615.0	630.9	652.1	662.8	677.2	706.1	727.7	730.0
157.5°	613.7	620.9	628.1	629.9	640.9	655.5	662.8	674.0	696.4	713.3	714.9
160°	624.0	629.7	635.3	636.6	645.4	657.0	662.8	672.4	691.6	706.0	707.0
162.5°	634.4	638.7	642.8	643.9	650.2	658.6	662.8	670.9	687.1	699.3	700.2
165°	645.6	649.5	653.3	654.3	657.1	660.9	662.8	668.6	680.2	689.0	689.9
167.5°	656.0	657.9	659.6	660.1	662.5	665.7	667.3	671.0	678.7	684.4	684.8
170°	662.8	664.6	666.4	666.9	667.0	667.2	667.3	671.0	678.7	684.4	684.4
172.5°	666.4	666.8	667.2	667.3	667.3	667.3	667.3	670.3	676.3	680.8	680.4
175°	671.3	671.3	671.3	671.3	670.0	668.1	667.3	669.2	673.0	675.9	675.9
177.5°	671.3	671.3	671.3	671.3	670.3	668.9	668.2	669.8	672.8	675.0	674.6
180°	671.3	671.3	671.3	671.3	671.3	671.3	671.3	671.3	671.3	671.3	671.3



TEST NUMBER: P937299

CATALOG NUMBER: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	597.2	597.2
2.5°	637.6	633.7
5°	820.0	823.8
7.5°	1104.2	1102.3
10°	1373.1	1390.3
12.5°	1568.9	1572.8
15°	1688.0	1695.7
17.5°	1734.1	1736.0
20°	1736.0	1732.2
22.5°	1714.8	1711.1
25°	1689.9	1688.0
27.5°	1666.9	1668.8
30°	1657.3	1663.0
32.5°	1657.3	1666.9
35°	1661.2	1670.7
37.5°	1659.2	1670.7
40°	1651.5	1664.9
42.5°	1630.3	1640.0
45°	1597.8	1609.2
47.5°	1555.5	1563.2
50°	1501.8	1509.4
52.5°	1434.5	1436.4
55°	1353.9	1361.5
57.5°	1267.5	1269.4
60°	1171.4	1177.1
62.5°	1069.7	1069.7
65°	962.1	965.9
67.5°	850.7	860.3
70°	737.4	739.3
72.5°	626.1	626.1
75°	510.9	512.7
77.5°	401.4	401.4
80°	297.7	299.6
82.5°	205.5	209.3
85°	128.7	128.7
87.5°	59.5	53.8
90°	17.2	17.2
92.5°	68.5	54.9
95°	239.1	197.8
97.5°	572.8	494.3
100°	825.2	731.7
102.5°	1073.7	993.5
105°	1390.2	1347.2
107.5°	1597.7	1608.1
110°	1676.8	1721.6



TEST NUMBER: P937299

CATALOG NUMBER: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1683.8	1752.7
115°	1639.2	1734.7
117.5°	1544.5	1650.4
120°	1468.2	1571.1
122.5°	1393.9	1495.5
125°	1288.0	1381.5
127.5°	1192.6	1271.5
130°	1136.4	1209.3
132.5°	1085.5	1150.8
135°	1015.6	1071.9
137.5°	959.6	1005.7
140°	921.2	964.3
142.5°	889.3	926.4
145°	841.6	869.6
147.5°	804.9	828.1
150°	781.9	800.7
152.5°	762.1	776.4
155°	739.4	748.8
157.5°	721.5	728.1
160°	710.8	714.6
162.5°	703.8	707.4
165°	693.7	697.5
167.5°	686.4	688.0
170°	684.4	684.4
172.5°	679.1	677.6
175°	675.9	675.9
177.5°	673.0	671.3
180°	671.3	671.3



TEST NUMBER: P937299
 CATALOG NUMBER: SQ4-FB-075U-100D-B35-1D-UNV-STD-W-6

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.68	6.59	6.61	7.55	8.80	18.84	19.76	19.78	20.72	21.96
	3H	6.39	7.21	7.33	8.18	9.45	20.68	21.50	21.63	22.47	23.74
	4H	6.69	7.47	7.65	8.44	9.72	21.33	22.11	22.29	23.08	24.36
	6H	6.94	7.66	7.91	8.64	9.93	21.76	22.47	22.73	23.45	24.74
	8H	7.01	7.70	7.99	8.69	9.98	21.88	22.56	22.85	23.56	24.84
	12H	7.03	7.68	8.02	8.67	9.99	21.94	22.60	22.93	23.58	24.90
4H	2H	12.89	13.67	13.86	14.64	15.92	19.12	19.90	20.09	20.88	22.15
	3H	14.47	15.12	15.44	16.12	17.41	21.17	21.82	22.15	22.82	24.12
	4H	14.56	15.16	15.55	16.15	17.47	21.94	22.53	22.92	23.53	24.84
	6H	14.58	15.09	15.57	16.11	17.42	22.47	22.99	23.47	24.01	25.32
	8H	14.55	15.04	15.56	16.05	17.38	22.64	23.12	23.64	24.13	25.46
	12H	14.51	14.95	15.53	15.98	17.31	22.73	23.17	23.75	24.19	25.53
8H	4H	16.01	16.49	17.01	17.50	18.83	22.00	22.48	23.00	23.50	24.82
	6H	16.25	16.65	17.28	17.71	19.03	22.63	23.03	23.65	24.08	25.41
	8H	16.27	16.63	17.31	17.66	19.01	22.85	23.20	23.88	24.24	25.58
	12H	16.24	16.55	17.28	17.59	18.98	22.99	23.30	24.03	24.34	25.72
12H	4H	16.15	16.59	17.17	17.62	18.95	21.96	22.39	22.98	23.42	24.76
	6H	16.51	16.86	17.54	17.90	19.25	22.61	22.97	23.65	24.01	25.35
	8H	16.58	16.89	17.62	17.93	19.32	22.84	23.15	23.88	24.19	25.58