

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938000

Luminaire Tested: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P938000
REPORT IS A COMBINATION OF REPORTS P933614 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14360.6 lumens
Efficiency: N/A
Efficacy: 129.1 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 111.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P938000
CATALOG NUMBER: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

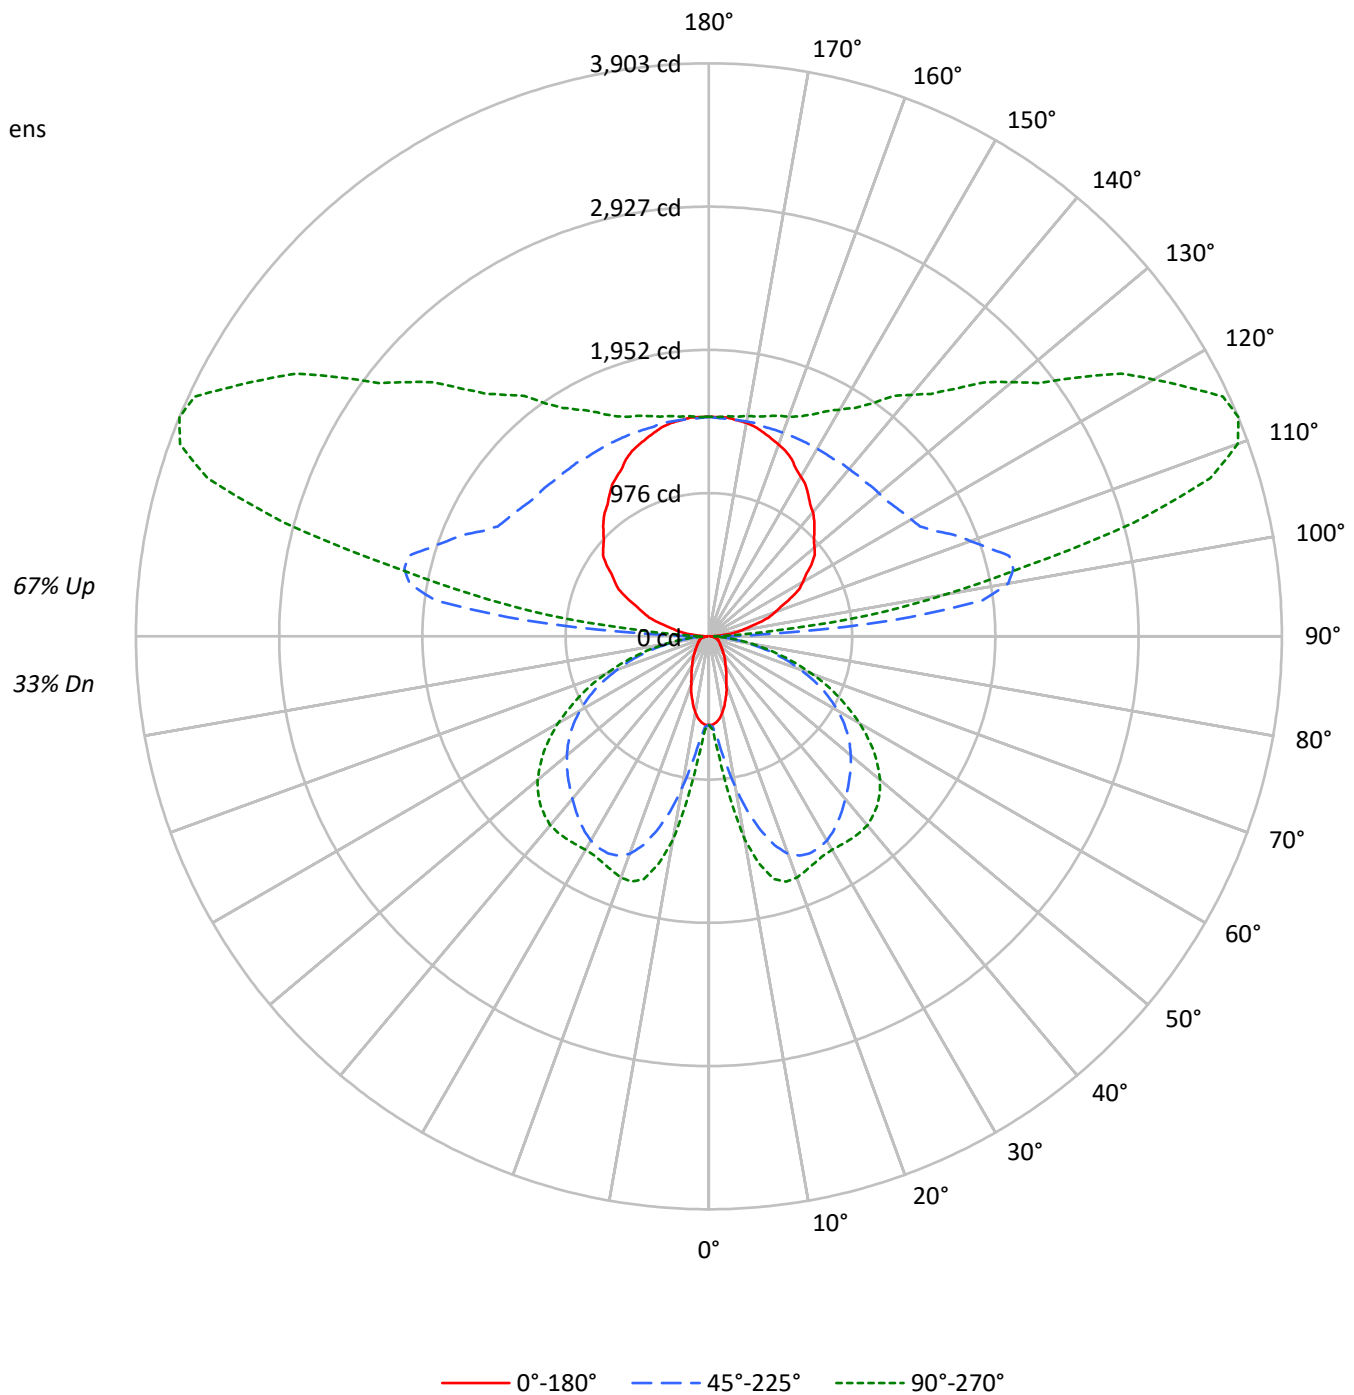



TEST NUMBER: P938000

CATALOG NUMBER: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33			33
1	94	89	85	82	84	80	77	74	64	62	60	49	47	46	35	34	33	27			27
2	85	77	71	66	76	70	65	60	55	52	49	42	40	38	30	29	27	22			22
3	77	68	60	54	69	61	55	50	49	44	40	37	34	31	26	24	23	18			18
4	70	59	52	46	63	54	47	42	43	38	34	33	29	26	23	21	19	15			15
5	64	53	45	39	57	48	41	35	38	33	29	29	25	23	21	18	16	13			13
6	59	47	39	33	53	42	35	30	34	29	25	26	22	19	19	16	14	11			11
7	54	42	34	29	49	38	31	26	31	25	22	23	20	17	17	14	12	10			10
8	50	38	30	25	45	34	28	23	28	23	19	21	18	15	15	13	11	8			8
9	47	34	27	22	42	31	25	20	25	20	17	19	16	13	14	12	10	7			7
10	43	31	24	19	39	28	22	18	23	18	15	18	14	12	13	10	9	7			7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2796	2796	2796
5°	2732	3232	3759
10°	2478	4711	6232
15°	2106	6156	7525
20°	1714	7133	7669
25°	1430	7465	7513
30°	1206	7512	7499
35°	1066	7387	7693
40°	929	7225	7893
45°	841	7106	7924
50°	772	6999	7793
55°	739	6843	7447
60°	757	6542	6902
65°	787	6086	6152
70°	839	5307	5197
75°	930	4327	4056
80°	1015	3001	2733
85°	904	1592	1398

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 7924 cd/sqm



TEST NUMBER: P938000

CATALOG NUMBER: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.0	0.5
10°-20°	345.6	2.4
20°-30°	604.4	4.2
30°-40°	778.1	5.4
40°-50°	869.1	6.1
50°-60°	832.4	5.8
60°-70°	659.6	4.6
70°-80°	387.9	2.7
80°-90°	113.5	0.8
90°-100°	728.8	5.1
100°-110°	1916.0	13.3
110°-120°	1986.7	13.8
120°-130°	1593.6	11.1
130°-140°	1250.4	8.7
140°-150°	959.7	6.7
150°-160°	691.2	4.8
160°-170°	422.9	2.9
170°-180°	142.9	1.0
0°-30°	1028.0	7.2
0°-40°	1806.0	12.6
0°-60°	3507.5	24.4
0°-90°	4668.5	32.5
90°-120°	4631.5	32.3
90°-150°	8435.1	58.7
90°-180°	9692.0	67.5
0°-180°	14360.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	603	603	603	603	603	
5°	587	630	709	802	831	54
15°	440	812	1368	1659	1711	122
25°	281	921	1630	1702	1704	129
35°	190	880	1535	1622	1686	119
45°	130	702	1357	1554	1624	100
55°	93	446	1151	1337	1374	85
65°	74	236	855	961	975	73
75°	54	145	469	516	517	57
85°	19	45	116	128	130	21
90°	10	28	76	38	38	10
95°	96	377	1255	647	440	107
105°	345	523	2118	3216	3000	366
115°	613	744	1697	3384	3863	606
125°	853	956	1543	2608	3076	757
135°	1016	1119	1495	2105	2387	786
145°	1179	1254	1476	1796	1936	739
155°	1333	1370	1476	1621	1668	612
165°	1438	1457	1476	1534	1553	406
175°	1495	1495	1486	1505	1505	142
180°	1495	1495	1495	1495	1495	



TEST NUMBER: P938000
 CATALOG NUMBER: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	602.7	602.7	602.7	602.7	602.7	602.7	602.7	602.7	602.7	602.7	602.7
2.5°	602.7	602.7	606.6	608.5	612.4	614.3	618.2	622.1	633.7	635.7	639.5
5°	587.2	595.0	620.2	629.8	657.0	693.8	709.3	734.5	786.8	802.3	812.0
7.5°	564.0	581.4	643.4	658.9	726.8	823.6	864.3	918.6	1001.9	1042.6	1075.6
10°	527.1	564.0	674.4	711.2	821.7	969.0	1044.6	1120.3	1246.2	1302.4	1323.8
12.5°	486.4	546.5	707.4	757.8	916.7	1131.9	1223.0	1306.3	1449.7	1525.3	1536.9
15°	439.9	521.3	738.4	812.0	1017.4	1267.5	1368.3	1471.0	1604.8	1659.0	1672.6
17.5°	399.2	501.9	767.4	845.0	1095.0	1389.6	1492.4	1577.6	1686.2	1723.0	1732.7
20°	348.8	470.9	786.8	887.6	1176.5	1478.8	1577.6	1643.5	1717.2	1740.4	1744.3
22.5°	312.0	438.0	798.5	903.1	1230.7	1533.1	1616.4	1668.7	1719.1	1726.9	1728.8
25°	281.0	401.2	796.5	920.6	1277.2	1566.0	1630.0	1668.7	1697.8	1701.7	1701.7
27.5°	251.9	360.5	788.8	924.4	1312.1	1573.8	1624.1	1651.3	1664.8	1672.6	1672.6
30°	226.7	321.7	769.4	916.7	1327.6	1566.0	1606.7	1620.3	1633.8	1645.5	1651.3
32.5°	207.4	284.9	740.3	901.2	1329.6	1546.6	1575.7	1583.4	1602.8	1630.0	1639.6
35°	189.9	248.1	707.4	879.9	1317.9	1515.6	1535.0	1542.7	1581.5	1622.2	1635.8
37.5°	172.5	220.9	664.7	843.0	1300.5	1478.8	1492.4	1505.9	1566.0	1614.5	1630.0
40°	155.0	197.7	614.3	802.3	1273.4	1434.2	1445.8	1467.2	1546.6	1602.8	1618.3
42.5°	141.5	178.3	560.1	759.7	1238.5	1383.8	1401.3	1432.3	1523.4	1583.4	1600.9
45°	129.8	158.9	501.9	701.6	1193.9	1331.5	1356.7	1399.3	1496.2	1554.4	1569.9
47.5°	118.2	145.4	441.9	641.5	1145.5	1279.2	1312.1	1360.6	1459.4	1515.6	1529.2
50°	108.5	131.8	381.8	577.5	1093.0	1223.0	1261.7	1312.1	1412.9	1465.2	1482.7
52.5°	100.8	120.2	325.6	513.6	1033.0	1164.8	1209.4	1261.7	1356.7	1407.1	1418.7
55°	93.0	110.5	277.1	445.7	970.9	1102.8	1151.3	1201.7	1294.7	1337.3	1345.1
57.5°	89.1	102.7	236.4	381.8	905.0	1033.0	1087.2	1133.8	1221.0	1254.0	1261.7
60°	83.3	96.9	205.4	327.5	833.3	967.1	1013.6	1060.1	1133.8	1161.0	1166.8
62.5°	77.5	93.0	182.2	275.2	759.7	889.5	936.1	978.7	1040.7	1060.1	1067.8
65°	73.6	89.1	164.7	236.4	684.1	808.1	854.7	891.5	941.9	961.2	965.1
67.5°	69.8	85.3	151.2	203.5	608.5	726.8	761.6	796.5	835.3	854.7	856.6
70°	64.0	81.4	139.5	180.2	531.0	633.7	662.8	699.6	730.6	740.3	746.1
72.5°	60.1	75.6	131.8	162.8	451.6	544.6	571.7	593.0	620.2	629.8	629.8
75°	54.3	67.8	124.0	145.4	370.2	445.7	469.0	490.3	511.6	515.5	509.7
77.5°	48.4	60.1	106.6	122.1	288.8	352.7	372.1	383.7	401.2	405.0	407.0
80°	40.7	52.3	83.3	95.0	209.3	259.7	273.3	282.9	298.5	298.5	302.3
82.5°	31.0	40.7	60.1	67.8	141.5	178.3	189.9	195.7	205.4	205.4	205.4
85°	19.4	25.2	38.8	44.6	85.3	108.5	116.3	118.2	126.0	127.9	127.9
87.5°	9.7	13.6	25.2	27.1	44.6	56.2	56.2	60.1	60.1	58.1	56.2
90°	10.1	18.1	26.1	28.1	44.2	65.6	76.3	67.7	50.8	38.1	38.1
92.5°	40.1	108.3	176.6	193.7	272.3	377.0	429.5	376.4	270.3	190.6	183.0
95°	96.3	221.2	346.1	377.3	670.0	1060.2	1255.2	1120.2	849.9	647.2	624.2
97.5°	166.6	276.7	386.9	414.4	902.4	1553.1	1878.4	1793.0	1622.2	1494.1	1450.4
100°	220.7	320.6	420.5	445.5	987.0	1709.0	2070.1	2076.3	2088.8	2098.2	2046.1
102.5°	266.9	360.1	453.3	476.7	1025.9	1758.2	2124.2	2233.1	2450.7	2613.9	2569.3
105°	345.2	424.1	503.0	522.8	1054.6	1763.7	2118.2	2362.1	2850.0	3215.9	3192.0
107.5°	425.5	499.0	572.6	591.0	1059.9	1685.2	1997.8	2338.1	3018.6	3529.0	3534.8
110°	479.7	546.1	612.6	629.2	1051.9	1615.6	1897.5	2277.9	3038.7	3609.2	3634.2



TEST NUMBER: P938000

CATALOG NUMBER: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	532.9	596.1	659.5	675.3	1052.2	1554.9	1806.1	2195.5	2974.1	3558.1	3596.4
115°	613.1	671.5	729.9	744.5	1061.9	1485.2	1696.8	2071.8	2821.9	3384.5	3437.7
117.5°	692.4	745.5	798.5	811.7	1081.7	1441.6	1621.5	1960.0	2636.9	3144.7	3203.7
120°	738.5	788.5	838.4	850.9	1097.7	1426.9	1591.4	1900.7	2519.2	2983.2	3040.4
122.5°	783.6	834.0	884.4	897.0	1120.7	1419.1	1568.3	1846.8	2403.9	2821.6	2878.1
125°	852.9	898.8	944.8	956.2	1151.9	1412.8	1543.2	1779.9	2253.0	2607.9	2659.9
127.5°	909.1	955.5	1001.8	1013.5	1183.1	1409.1	1522.2	1725.3	2131.6	2436.3	2480.2
130°	939.2	989.2	1039.1	1051.6	1205.7	1411.3	1514.2	1695.0	2056.7	2327.9	2368.5
132.5°	970.3	1020.3	1070.2	1082.7	1224.1	1412.8	1507.1	1669.0	1992.7	2235.6	2271.9
135°	1016.5	1061.9	1107.5	1118.8	1244.2	1411.4	1495.1	1630.6	1901.8	2105.2	2136.5
137.5°	1063.6	1108.6	1153.7	1164.9	1274.3	1420.2	1493.0	1607.7	1836.9	2008.8	2034.5
140°	1102.7	1144.2	1185.7	1196.0	1292.7	1421.6	1486.1	1585.1	1783.1	1931.6	1955.5
142.5°	1132.9	1171.2	1209.5	1219.1	1308.1	1426.8	1486.1	1573.0	1746.9	1877.3	1898.0
145°	1179.0	1212.4	1245.9	1254.3	1328.2	1426.8	1476.0	1547.1	1689.5	1796.1	1811.7
147.5°	1225.2	1257.8	1290.3	1298.5	1357.7	1436.5	1476.0	1532.0	1643.9	1727.9	1740.8
150°	1255.2	1284.7	1314.2	1321.5	1373.0	1441.7	1476.0	1523.3	1617.8	1688.8	1699.2
152.5°	1286.3	1308.6	1330.9	1336.5	1383.1	1445.0	1476.0	1516.4	1597.1	1657.7	1665.6
155°	1332.6	1349.0	1365.5	1369.7	1405.1	1452.3	1476.0	1508.2	1572.4	1620.6	1625.8
157.5°	1366.7	1382.7	1398.8	1402.7	1427.1	1459.7	1476.0	1501.0	1550.9	1588.4	1592.1
160°	1389.7	1402.2	1414.7	1417.8	1437.2	1463.1	1476.0	1497.4	1540.2	1572.3	1574.4
162.5°	1412.8	1422.1	1431.5	1433.8	1447.9	1466.6	1476.0	1494.0	1530.1	1557.3	1559.3
165°	1437.9	1446.4	1454.9	1457.0	1463.3	1471.7	1476.0	1489.0	1514.8	1534.2	1536.3
167.5°	1461.0	1464.9	1469.0	1470.0	1475.3	1482.5	1486.1	1494.5	1511.4	1524.1	1525.0
170°	1476.0	1480.1	1484.1	1485.1	1485.4	1485.9	1486.1	1494.5	1511.4	1524.1	1524.1
172.5°	1484.0	1484.9	1485.9	1486.1	1486.1	1486.1	1486.1	1492.7	1506.1	1516.2	1515.4
175°	1495.1	1495.1	1495.1	1495.1	1492.1	1488.1	1486.1	1490.3	1498.8	1505.1	1505.1
177.5°	1495.1	1495.1	1495.1	1495.1	1492.7	1489.6	1488.1	1491.4	1498.1	1503.1	1502.2
180°	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1



TEST NUMBER: P938000

CATALOG NUMBER: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	602.7	602.7
2.5°	643.4	639.5
5°	827.5	831.4
7.5°	1114.4	1112.5
10°	1385.8	1403.2
12.5°	1583.4	1587.3
15°	1703.6	1711.4
17.5°	1750.1	1752.0
20°	1752.0	1748.2
22.5°	1730.7	1726.9
25°	1705.5	1703.6
27.5°	1682.3	1684.2
30°	1672.6	1678.4
32.5°	1672.6	1682.3
35°	1676.5	1686.2
37.5°	1674.5	1686.2
40°	1666.8	1680.3
42.5°	1645.5	1655.1
45°	1612.5	1624.1
47.5°	1569.9	1577.6
50°	1515.6	1523.4
52.5°	1447.8	1449.7
55°	1366.4	1374.1
57.5°	1279.2	1281.1
60°	1182.3	1188.1
62.5°	1079.5	1079.5
65°	970.9	974.8
67.5°	858.5	868.2
70°	744.2	746.1
72.5°	631.8	631.8
75°	515.5	517.4
77.5°	405.0	405.0
80°	300.4	302.3
82.5°	207.4	211.2
85°	129.8	129.8
87.5°	60.1	54.3
90°	38.1	38.1
92.5°	152.7	122.4
95°	532.4	440.5
97.5°	1275.6	1100.8
100°	1837.8	1629.6
102.5°	2390.9	2212.5
105°	3096.1	3000.2
107.5°	3558.0	3581.1
110°	3734.1	3834.0



TEST NUMBER: P938000

CATALOG NUMBER: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	3749.8	3903.2
115°	3650.4	3863.1
117.5°	3439.6	3675.5
120°	3269.7	3498.9
122.5°	3104.3	3330.4
125°	2868.2	3076.5
127.5°	2655.9	2831.6
130°	2530.8	2693.1
132.5°	2417.4	2562.7
135°	2261.8	2387.1
137.5°	2137.0	2239.6
140°	2051.5	2147.3
142.5°	1980.4	2063.0
145°	1874.1	1936.5
147.5°	1792.6	1844.3
150°	1741.2	1783.1
152.5°	1697.2	1728.9
155°	1646.7	1667.6
157.5°	1606.8	1621.5
160°	1582.9	1591.4
162.5°	1567.4	1575.4
165°	1544.8	1553.3
167.5°	1528.6	1532.2
170°	1524.1	1524.1
172.5°	1512.2	1509.1
175°	1505.1	1505.1
177.5°	1498.7	1495.1
180°	1495.1	1495.1



TEST NUMBER: P938000
 CATALOG NUMBER: SQ4-FB-125U-075D-B35-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.71	3.46	3.80	4.55	6.05	15.89	16.64	16.98	17.73	19.23
	3H	3.41	4.08	4.51	5.18	6.70	17.72	18.39	18.82	19.49	21.01
	4H	3.70	4.34	4.81	5.44	6.96	18.36	19.00	19.47	20.10	21.62
	6H	3.95	4.53	5.07	5.64	7.17	18.79	19.37	19.91	20.48	22.01
	8H	4.01	4.57	5.13	5.69	7.22	18.91	19.46	20.03	20.58	22.11
	12H	4.03	4.56	5.15	5.67	7.22	18.97	19.50	20.09	20.61	22.16
4H	2H	9.92	10.55	11.03	11.65	13.17	16.15	16.79	17.27	17.89	19.41
	3H	11.47	12.01	12.59	13.13	14.67	18.19	18.72	19.31	19.85	21.38
	4H	11.56	12.05	12.69	13.17	14.72	18.95	19.44	20.08	20.56	22.11
	6H	11.57	11.99	12.70	13.13	14.67	19.48	19.90	20.62	21.04	22.59
	8H	11.54	11.93	12.67	13.06	14.63	19.64	20.03	20.77	21.17	22.73
	12H	11.49	11.85	12.64	12.99	14.56	19.73	20.09	20.88	21.23	22.80
8H	4H	13.00	13.39	14.13	14.52	16.08	19.00	19.39	20.13	20.52	22.09
	6H	13.23	13.56	14.39	14.73	16.29	19.62	19.95	20.78	21.12	22.68
	8H	13.25	13.53	14.41	14.69	16.27	19.84	20.13	21.00	21.28	22.86
	12H	13.21	13.46	14.38	14.61	16.23	19.98	20.23	21.15	21.38	22.99
12H	4H	13.14	13.49	14.28	14.63	16.20	18.95	19.30	20.10	20.45	22.01
	6H	13.49	13.78	14.65	14.93	16.51	19.61	19.89	20.77	21.04	22.62
	8H	13.55	13.80	14.72	14.95	16.57	19.83	20.08	20.99	21.23	22.84