

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938200

Luminaire Tested: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P938200
REPORT IS A COMBINATION OF REPORTS P933616 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 17588.3 lumens
Efficiency: N/A
Efficacy: 116.9 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 150.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P938200
CATALOG NUMBER: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

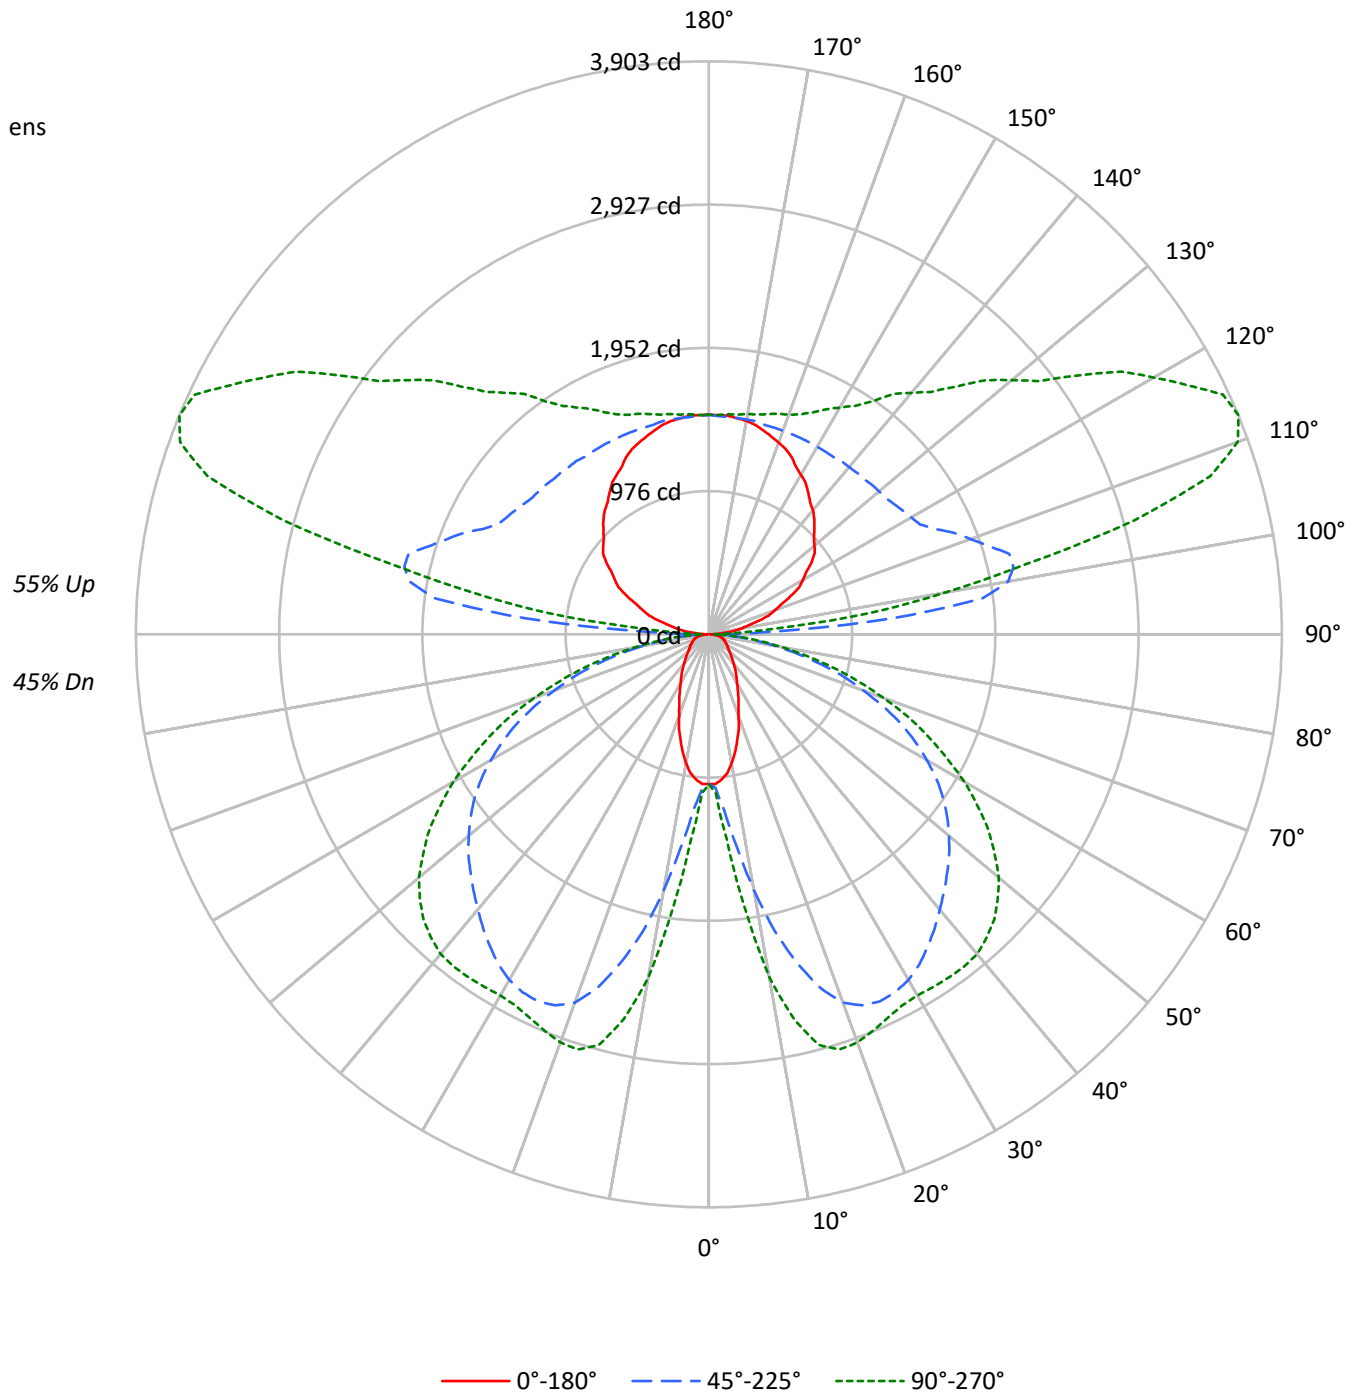



TEST NUMBER: P938200

CATALOG NUMBER: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45	45	45	45
1	96	92	88	84	88	84	81	77	70	67	65	57	55	53	45	44	42	37	37	37	37
2	87	79	73	68	79	73	67	63	61	56	53	49	46	44	39	37	35	30	30	30	30
3	79	69	62	56	72	64	57	52	53	48	44	43	39	36	34	31	29	25	25	25	25
4	72	61	53	47	66	56	49	43	47	41	37	38	34	31	30	27	25	21	21	21	21
5	66	54	46	39	60	50	42	37	41	36	31	34	29	26	27	23	21	18	18	18	18
6	60	48	40	34	55	44	37	31	37	31	27	30	26	23	24	21	18	15	15	15	15
7	56	43	35	29	51	40	32	27	33	28	23	27	23	20	22	18	16	13	13	13	13
8	52	39	31	26	47	36	29	24	30	25	21	25	20	17	20	16	14	12	12	12	12
9	48	35	28	23	44	33	26	21	27	22	18	23	18	15	18	15	12	10	10	10	10
10	45	32	25	20	41	30	23	19	25	20	16	21	17	14	17	13	11	9	9	9	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4732	4732	4732
5°	4623	5470	6361
10°	4194	7973	10546
15°	3564	10416	12734
20°	2901	12071	12977
25°	2421	12632	12714
30°	2041	12711	12690
35°	1805	12500	13018
40°	1573	12226	13357
45°	1424	12025	13409
50°	1306	11844	13187
55°	1252	11580	12603
60°	1281	11071	11680
65°	1332	10298	10412
70°	1419	8981	8796
75°	1574	7323	6864
80°	1719	5078	4625
85°	1528	2695	2368

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 13409 cd/sqm



TEST NUMBER: P938200

CATALOG NUMBER: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	131.9	0.8
10°-20°	584.8	3.3
20°-30°	1022.8	5.8
30°-40°	1316.7	7.5
40°-50°	1470.7	8.4
50°-60°	1408.6	8.0
60°-70°	1116.3	6.3
70°-80°	656.4	3.7
80°-90°	188.1	1.1
90°-100°	728.8	4.1
100°-110°	1916.0	10.9
110°-120°	1986.7	11.3
120°-130°	1593.6	9.1
130°-140°	1250.4	7.1
140°-150°	959.7	5.5
150°-160°	691.2	3.9
160°-170°	422.9	2.4
170°-180°	142.9	0.8
0°-30°	1739.5	9.9
0°-40°	3056.2	17.4
0°-60°	5935.5	33.7
0°-90°	7896.3	44.9
90°-120°	4631.5	26.3
90°-150°	8435.1	48.0
90°-180°	9692.0	55.1
0°-180°	17588.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1020	1020	1020	1020	1020	
5°	994	1066	1200	1358	1407	92
15°	744	1374	2315	2807	2896	207
25°	476	1558	2758	2880	2883	219
35°	321	1489	2598	2745	2853	201
45°	220	1187	2296	2630	2748	170
55°	158	754	1948	2263	2325	143
65°	125	400	1446	1627	1650	123
75°	92	246	794	872	876	96
85°	33	75	197	216	220	35
90°	10	28	76	38	38	11
95°	96	377	1255	647	440	107
105°	345	523	2118	3216	3000	366
115°	613	744	1697	3384	3863	606
125°	853	956	1543	2608	3076	757
135°	1016	1119	1495	2105	2387	786
145°	1179	1254	1476	1796	1936	739
155°	1333	1370	1476	1621	1668	612
165°	1438	1457	1476	1534	1553	406
175°	1495	1495	1486	1505	1505	142
180°	1495	1495	1495	1495	1495	



TEST NUMBER: P938200
 CATALOG NUMBER: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1020.0	1020.0	1020.0	1020.0	1020.0	1020.0	1020.0	1020.0	1020.0	1020.0	1020.0
2.5°	1020.0	1020.0	1026.6	1029.9	1036.3	1039.6	1046.2	1052.8	1072.5	1075.8	1082.3
5°	993.7	1006.9	1049.5	1065.9	1111.8	1174.1	1200.4	1243.0	1331.5	1357.8	1374.1
7.5°	954.4	983.9	1088.9	1115.1	1229.9	1393.9	1462.7	1554.6	1695.6	1764.5	1820.3
10°	892.1	954.4	1141.3	1203.6	1390.6	1639.8	1767.7	1895.7	2108.8	2204.0	2240.0
12.5°	823.2	924.9	1197.1	1282.4	1551.3	1915.3	2069.5	2210.5	2453.2	2581.1	2600.8
15°	744.5	882.3	1249.5	1374.1	1721.8	2144.9	2315.4	2489.3	2715.6	2807.4	2830.4
17.5°	675.6	849.4	1298.8	1430.0	1853.0	2351.6	2525.3	2669.7	2853.3	2915.6	2932.0
20°	590.3	797.0	1331.5	1502.0	1990.8	2502.4	2669.7	2781.1	2905.8	2945.2	2951.7
22.5°	528.0	741.2	1351.3	1528.3	2082.6	2594.2	2735.3	2823.8	2909.0	2922.2	2925.5
25°	475.6	678.9	1348.0	1557.9	2161.4	2650.0	2758.3	2823.8	2873.0	2879.6	2879.6
27.5°	426.4	610.0	1334.8	1564.5	2220.4	2663.1	2748.4	2794.3	2817.3	2830.4	2830.4
30°	383.7	544.4	1302.0	1551.3	2246.6	2650.0	2718.8	2741.8	2764.8	2784.4	2794.3
32.5°	351.0	482.1	1252.8	1525.0	2249.8	2617.2	2666.4	2679.5	2712.3	2758.3	2774.6
35°	321.4	419.8	1197.1	1489.0	2230.2	2564.7	2597.5	2610.6	2676.2	2745.1	2768.0
37.5°	291.9	373.8	1124.9	1426.7	2200.7	2502.4	2525.3	2548.3	2650.0	2732.0	2758.3
40°	262.4	334.5	1039.6	1357.8	2154.8	2427.0	2446.6	2482.7	2617.2	2712.3	2738.5
42.5°	239.4	301.7	947.9	1285.7	2095.8	2341.7	2371.2	2423.7	2577.8	2679.5	2709.0
45°	219.8	268.9	849.4	1187.2	2020.3	2253.1	2295.8	2367.9	2531.9	2630.4	2656.5
47.5°	200.1	245.9	747.8	1085.6	1938.3	2164.6	2220.4	2302.3	2469.6	2564.7	2587.7
50°	183.6	223.1	646.1	977.3	1849.7	2069.5	2135.1	2220.4	2390.9	2479.5	2508.9
52.5°	170.5	203.3	551.0	869.1	1748.1	1971.0	2046.5	2135.1	2295.8	2381.0	2400.7
55°	157.5	186.9	469.0	754.4	1643.1	1866.1	1948.2	2033.4	2190.8	2263.0	2276.1
57.5°	150.9	173.8	400.1	646.1	1531.6	1748.1	1839.9	1918.6	2066.2	2121.9	2135.1
60°	141.0	164.0	347.7	554.3	1410.3	1636.5	1715.2	1794.0	1918.6	1964.6	1974.3
62.5°	131.2	157.5	308.3	465.7	1285.7	1505.3	1584.1	1656.2	1761.2	1794.0	1807.1
65°	124.6	150.9	278.8	400.1	1157.8	1367.6	1446.3	1508.6	1593.9	1626.8	1633.2
67.5°	118.0	144.3	255.8	344.4	1029.9	1229.9	1288.9	1348.0	1413.6	1446.3	1449.6
70°	108.2	137.8	236.1	305.0	898.7	1072.5	1121.6	1183.9	1236.4	1252.8	1262.7
72.5°	101.6	127.9	223.1	275.5	764.2	921.6	967.5	1003.6	1049.5	1065.9	1065.9
75°	91.9	114.8	209.9	245.9	626.5	754.4	793.7	829.8	865.8	872.4	862.6
77.5°	82.0	101.6	180.4	206.6	488.7	596.9	629.7	649.4	678.9	685.5	688.8
80°	68.9	88.6	141.0	160.7	354.2	439.4	462.4	478.9	505.0	505.0	511.6
82.5°	52.5	68.9	101.6	114.8	239.4	301.7	321.4	331.2	347.7	347.7	347.7
85°	32.8	42.6	65.6	75.4	144.3	183.6	196.8	200.1	213.2	216.5	216.5
87.5°	16.4	23.0	42.6	45.9	75.4	95.2	95.2	101.6	101.6	98.4	95.2
90°	10.1	18.1	26.1	28.1	44.2	65.6	76.3	67.7	50.8	38.1	38.1
92.5°	40.1	108.3	176.6	193.7	272.3	377.0	429.5	376.4	270.3	190.6	183.0
95°	96.3	221.2	346.1	377.3	670.0	1060.2	1255.2	1120.2	849.9	647.2	624.2
97.5°	166.6	276.7	386.9	414.4	902.4	1553.1	1878.4	1793.0	1622.2	1494.1	1450.4
100°	220.7	320.6	420.5	445.5	987.0	1709.0	2070.1	2076.3	2088.8	2098.2	2046.1
102.5°	266.9	360.1	453.3	476.7	1025.9	1758.2	2124.2	2233.1	2450.7	2613.9	2569.3
105°	345.2	424.1	503.0	522.8	1054.6	1763.7	2118.2	2362.1	2850.0	3215.9	3192.0
107.5°	425.5	499.0	572.6	591.0	1059.9	1685.2	1997.8	2338.1	3018.6	3529.0	3534.8
110°	479.7	546.1	612.6	629.2	1051.9	1615.6	1897.5	2277.9	3038.7	3609.2	3634.2



TEST NUMBER: P938200

CATALOG NUMBER: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	532.9	596.1	659.5	675.3	1052.2	1554.9	1806.1	2195.5	2974.1	3558.1	3596.4
115°	613.1	671.5	729.9	744.5	1061.9	1485.2	1696.8	2071.8	2821.9	3384.5	3437.7
117.5°	692.4	745.5	798.5	811.7	1081.7	1441.6	1621.5	1960.0	2636.9	3144.7	3203.7
120°	738.5	788.5	838.4	850.9	1097.7	1426.9	1591.4	1900.7	2519.2	2983.2	3040.4
122.5°	783.6	834.0	884.4	897.0	1120.7	1419.1	1568.3	1846.8	2403.9	2821.6	2878.1
125°	852.9	898.8	944.8	956.2	1151.9	1412.8	1543.2	1779.9	2253.0	2607.9	2659.9
127.5°	909.1	955.5	1001.8	1013.5	1183.1	1409.1	1522.2	1725.3	2131.6	2436.3	2480.2
130°	939.2	989.2	1039.1	1051.6	1205.7	1411.3	1514.2	1695.0	2056.7	2327.9	2368.5
132.5°	970.3	1020.3	1070.2	1082.7	1224.1	1412.8	1507.1	1669.0	1992.7	2235.6	2271.9
135°	1016.5	1061.9	1107.5	1118.8	1244.2	1411.4	1495.1	1630.6	1901.8	2105.2	2136.5
137.5°	1063.6	1108.6	1153.7	1164.9	1274.3	1420.2	1493.0	1607.7	1836.9	2008.8	2034.5
140°	1102.7	1144.2	1185.7	1196.0	1292.7	1421.6	1486.1	1585.1	1783.1	1931.6	1955.5
142.5°	1132.9	1171.2	1209.5	1219.1	1308.1	1426.8	1486.1	1573.0	1746.9	1877.3	1898.0
145°	1179.0	1212.4	1245.9	1254.3	1328.2	1426.8	1476.0	1547.1	1689.5	1796.1	1811.7
147.5°	1225.2	1257.8	1290.3	1298.5	1357.7	1436.5	1476.0	1532.0	1643.9	1727.9	1740.8
150°	1255.2	1284.7	1314.2	1321.5	1373.0	1441.7	1476.0	1523.3	1617.8	1688.8	1699.2
152.5°	1286.3	1308.6	1330.9	1336.5	1383.1	1445.0	1476.0	1516.4	1597.1	1657.7	1665.6
155°	1332.6	1349.0	1365.5	1369.7	1405.1	1452.3	1476.0	1508.2	1572.4	1620.6	1625.8
157.5°	1366.7	1382.7	1398.8	1402.7	1427.1	1459.7	1476.0	1501.0	1550.9	1588.4	1592.1
160°	1389.7	1402.2	1414.7	1417.8	1437.2	1463.1	1476.0	1497.4	1540.2	1572.3	1574.4
162.5°	1412.8	1422.1	1431.5	1433.8	1447.9	1466.6	1476.0	1494.0	1530.1	1557.3	1559.3
165°	1437.9	1446.4	1454.9	1457.0	1463.3	1471.7	1476.0	1489.0	1514.8	1534.2	1536.3
167.5°	1461.0	1464.9	1469.0	1470.0	1475.3	1482.5	1486.1	1494.5	1511.4	1524.1	1525.0
170°	1476.0	1480.1	1484.1	1485.1	1485.4	1485.9	1486.1	1494.5	1511.4	1524.1	1524.1
172.5°	1484.0	1484.9	1485.9	1486.1	1486.1	1486.1	1486.1	1492.7	1506.1	1516.2	1515.4
175°	1495.1	1495.1	1495.1	1495.1	1492.1	1488.1	1486.1	1490.3	1498.8	1505.1	1505.1
177.5°	1495.1	1495.1	1495.1	1495.1	1492.7	1489.6	1488.1	1491.4	1498.1	1503.1	1502.2
180°	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1	1495.1



TEST NUMBER: P938200

CATALOG NUMBER: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1020.0	1020.0
2.5°	1088.9	1082.3
5°	1400.4	1407.0
7.5°	1885.8	1882.6
10°	2345.0	2374.5
12.5°	2679.5	2686.1
15°	2882.9	2896.0
17.5°	2961.6	2964.8
20°	2964.8	2958.3
22.5°	2928.8	2922.2
25°	2886.2	2882.9
27.5°	2846.7	2850.0
30°	2830.4	2840.2
32.5°	2830.4	2846.7
35°	2836.9	2853.3
37.5°	2833.6	2853.3
40°	2820.6	2843.5
42.5°	2784.4	2800.9
45°	2728.7	2748.4
47.5°	2656.5	2669.7
50°	2564.7	2577.8
52.5°	2449.9	2453.2
55°	2312.1	2325.3
57.5°	2164.6	2167.8
60°	2000.6	2010.5
62.5°	1826.8	1826.8
65°	1643.1	1649.7
67.5°	1452.9	1469.3
70°	1259.4	1262.7
72.5°	1069.2	1069.2
75°	872.4	875.7
77.5°	685.5	685.5
80°	508.3	511.6
82.5°	351.0	357.5
85°	219.8	219.8
87.5°	101.6	91.9
90°	38.1	38.1
92.5°	152.7	122.4
95°	532.4	440.5
97.5°	1275.6	1100.8
100°	1837.8	1629.6
102.5°	2390.9	2212.5
105°	3096.1	3000.2
107.5°	3558.0	3581.1
110°	3734.1	3834.0



TEST NUMBER: P938200

CATALOG NUMBER: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	3749.8	3903.2
115°	3650.4	3863.1
117.5°	3439.6	3675.5
120°	3269.7	3498.9
122.5°	3104.3	3330.4
125°	2868.2	3076.5
127.5°	2655.9	2831.6
130°	2530.8	2693.1
132.5°	2417.4	2562.7
135°	2261.8	2387.1
137.5°	2137.0	2239.6
140°	2051.5	2147.3
142.5°	1980.4	2063.0
145°	1874.1	1936.5
147.5°	1792.6	1844.3
150°	1741.2	1783.1
152.5°	1697.2	1728.9
155°	1646.7	1667.6
157.5°	1606.8	1621.5
160°	1582.9	1591.4
162.5°	1567.4	1575.4
165°	1544.8	1553.3
167.5°	1528.6	1532.2
170°	1524.1	1524.1
172.5°	1512.2	1509.1
175°	1505.1	1505.1
177.5°	1498.7	1495.1
180°	1495.1	1495.1



TEST NUMBER: P938200
 CATALOG NUMBER: SQ4-FB-125U-125D-B35-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.92	6.77	6.91	7.78	9.12	19.10	19.95	20.09	20.96	22.30
	3H	6.63	7.39	7.63	8.41	9.77	20.94	21.70	21.94	22.72	24.08
	4H	6.92	7.65	7.94	8.67	10.04	21.58	22.31	22.60	23.33	24.70
	6H	7.17	7.84	8.20	8.87	10.25	22.01	22.68	23.04	23.71	25.09
	8H	7.24	7.88	8.27	8.92	10.30	22.13	22.77	23.17	23.81	25.19
	12H	7.26	7.86	8.30	8.90	10.30	22.20	22.81	23.24	23.84	25.24
4H	2H	13.13	13.86	14.16	14.88	16.25	19.37	20.10	20.39	21.12	22.49
	3H	14.70	15.31	15.73	16.36	17.74	21.42	22.02	22.45	23.07	24.45
	4H	14.80	15.35	15.83	16.39	17.80	22.18	22.74	23.22	23.78	25.18
	6H	14.81	15.29	15.85	16.35	17.75	22.72	23.20	23.77	24.27	25.67
	8H	14.78	15.23	15.83	16.29	17.70	22.88	23.33	23.93	24.39	25.80
	12H	14.74	15.14	15.81	16.22	17.64	22.98	23.38	24.05	24.45	25.88
8H	4H	16.24	16.69	17.29	17.75	19.16	22.24	22.69	23.29	23.75	25.16
	6H	16.48	16.85	17.56	17.95	19.36	22.87	23.24	23.95	24.34	25.75
	8H	16.50	16.83	17.58	17.91	19.34	23.09	23.42	24.17	24.50	25.93
	12H	16.47	16.75	17.55	17.83	19.30	23.24	23.52	24.32	24.60	26.07
12H	4H	16.38	16.79	17.45	17.86	19.28	22.20	22.60	23.26	23.67	25.09
	6H	16.74	17.07	17.82	18.15	19.58	22.86	23.18	23.94	24.26	25.70
	8H	16.81	17.10	17.89	18.17	19.65	23.08	23.37	24.17	24.45	25.92