

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936402

Luminaire Tested: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936402  
REPORT IS A COMBINATION OF REPORTS P933438 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3222.1 lumens  
Efficiency: N/A  
Efficacy: 107.4 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 30  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936402  
CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

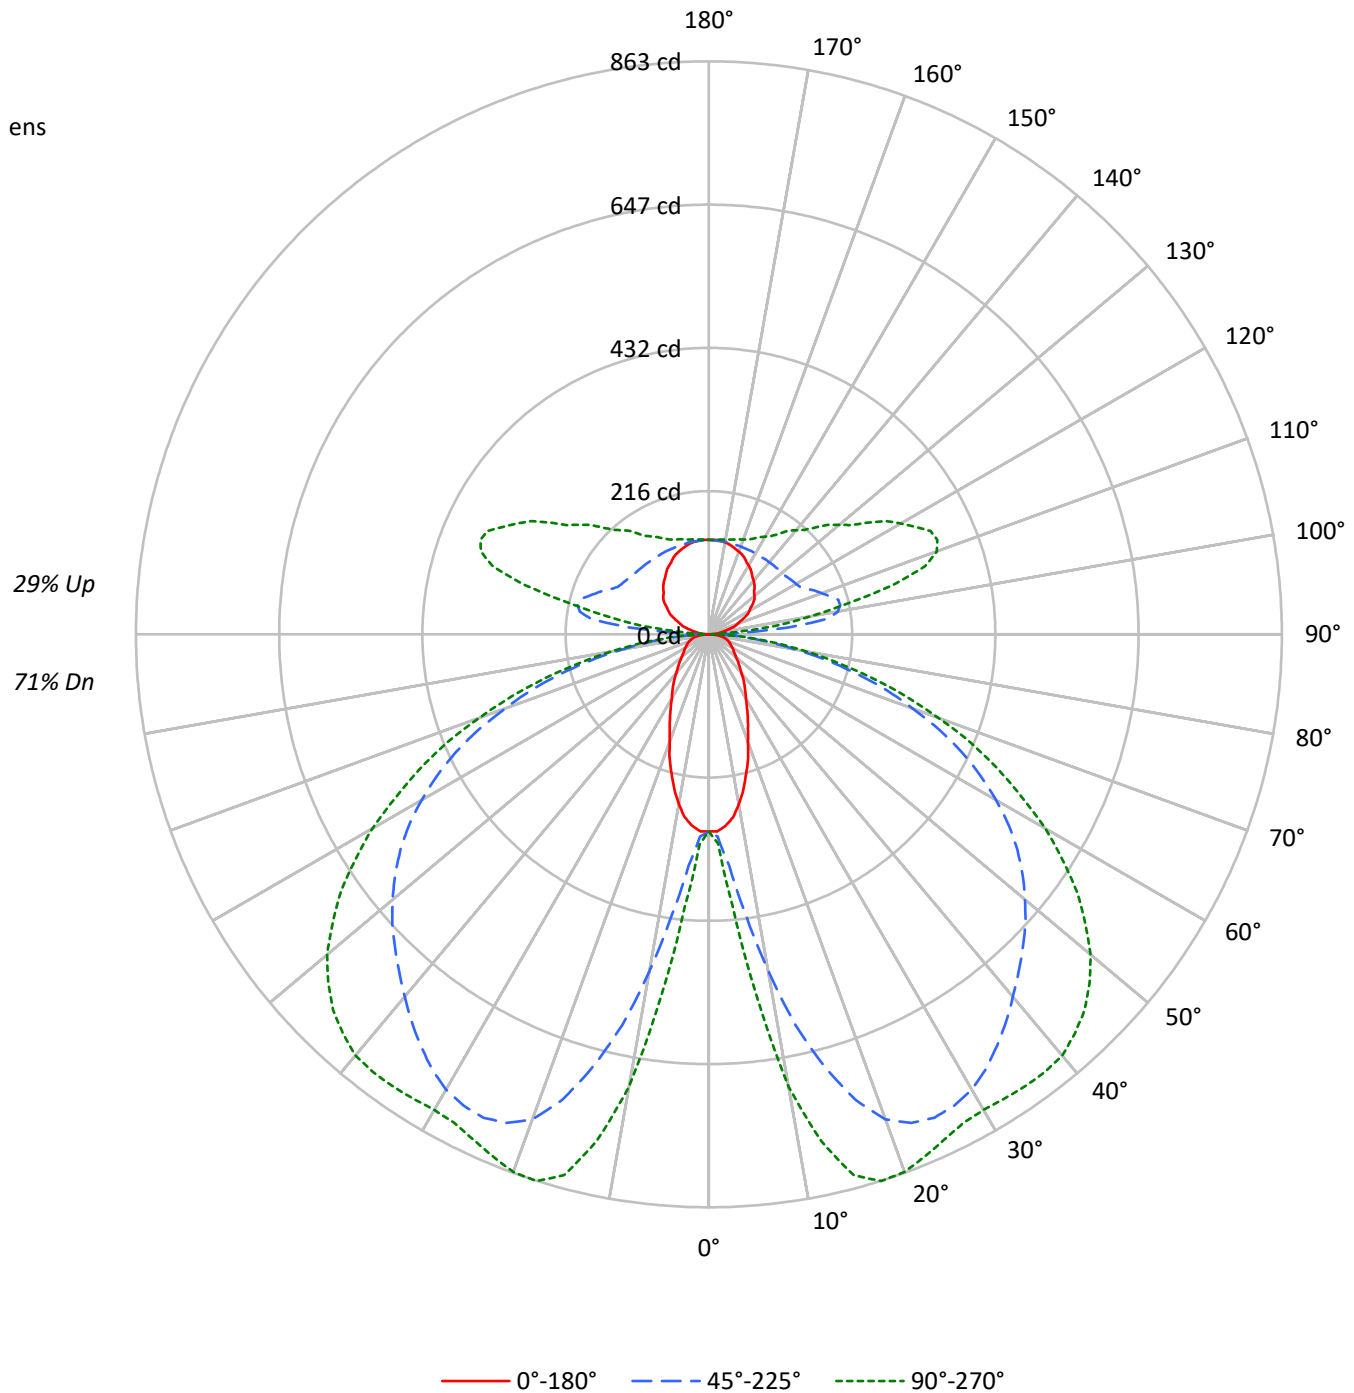



TEST NUMBER: P936402

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	71
1	102	97	93	89	96	92	88	85	82	79	77	74	71	69	66	64	62	62	62	62	58
2	92	84	77	71	87	79	73	68	71	66	62	64	60	57	57	54	51	51	51	51	48
3	83	73	65	58	79	69	62	56	62	56	51	56	51	47	50	46	43	43	43	43	39
4	76	64	55	49	71	61	53	47	55	48	43	49	44	39	44	40	36	36	36	36	33
5	69	57	48	41	65	54	46	40	49	42	37	44	38	34	39	34	31	31	31	31	28
6	64	51	42	35	60	48	40	34	43	37	32	39	33	29	35	30	27	27	27	27	24
7	59	45	37	31	55	43	35	30	39	32	27	35	30	25	32	27	23	23	23	23	21
8	54	41	33	27	51	39	31	26	36	29	24	32	26	22	29	24	21	21	21	21	18
9	51	37	29	24	48	36	28	23	32	26	21	29	24	20	26	22	18	18	18	18	16
10	47	34	26	21	45	33	25	21	30	23	19	27	22	18	24	20	16	16	16	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2756	2756	2756
5°	2690	3183	3704
10°	2437	4636	6141
15°	2069	6053	7416
20°	1682	7009	7558
25°	1402	7330	7404
30°	1180	7370	7390
35°	1042	7242	7581
40°	906	7077	7779
45°	819	6954	7809
50°	750	6842	7680
55°	715	6682	7340
60°	731	6380	6802
65°	756	5925	6064
70°	800	5156	5123
75°	876	4193	3998
80°	941	2899	2694
85°	787	1529	1379

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 7809 cd/sqm



TEST NUMBER: P936402

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	38.4	1.2
10°-20°	170.3	5.3
20°-30°	297.8	9.2
30°-40°	383.4	11.9
40°-50°	428.2	13.3
50°-60°	410.2	12.7
60°-70°	325.1	10.1
70°-80°	191.1	5.9
80°-90°	53.6	1.7
90°-100°	69.5	2.2
100°-110°	182.7	5.7
110°-120°	189.4	5.9
120°-130°	151.9	4.7
130°-140°	119.2	3.7
140°-150°	91.5	2.8
150°-160°	65.9	2.0
160°-170°	40.3	1.3
170°-180°	13.6	0.4
0°-30°	506.5	15.7
0°-40°	889.9	27.6
0°-60°	1728.3	53.6
0°-90°	2298.2	71.3
90°-120°	441.5	13.7
90°-150°	804.1	25.0
90°-180°	924.0	28.7
0°-180°	3222.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	297	297	297	297	297	
5°	289	310	350	395	410	27
15°	217	400	674	818	843	60
25°	138	454	803	838	839	64
35°	94	434	756	799	831	58
45°	64	346	668	766	800	50
55°	46	220	567	659	677	42
65°	36	116	421	474	480	36
75°	27	72	231	254	255	28
85°	10	22	57	63	64	10
90°	1	3	7	4	4	1
95°	9	36	120	62	42	10
105°	33	50	202	307	286	35
115°	58	71	162	323	368	58
125°	81	91	147	249	293	72
135°	97	107	142	201	228	75
145°	112	120	141	171	185	70
155°	127	130	141	154	159	58
165°	137	139	141	146	148	39
175°	142	142	142	143	143	14
180°	142	142	142	142	142	



TEST NUMBER: P936402  
 CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	297.0	297.0	297.0	297.0	297.0	297.0	297.0	297.0	297.0	297.0	297.0
2.5°	297.0	297.0	298.9	299.9	301.8	302.7	304.6	306.6	312.3	313.2	315.2
5°	289.4	293.2	305.6	310.4	323.7	341.9	349.5	361.9	387.7	395.4	400.1
7.5°	277.9	286.5	317.1	324.7	358.1	405.9	425.9	452.7	493.7	513.8	530.0
10°	259.8	277.9	332.3	350.5	404.9	477.5	514.7	552.0	614.1	641.8	652.3
12.5°	239.7	269.3	348.6	373.4	451.7	557.7	602.6	643.7	714.3	751.6	757.3
15°	216.8	256.9	363.9	400.1	501.4	624.6	674.2	724.8	790.7	817.5	824.2
17.5°	196.7	247.3	378.2	416.4	539.6	684.7	735.4	777.4	830.8	849.0	853.8
20°	171.9	232.1	387.7	437.4	579.7	728.7	777.4	809.8	846.1	857.6	859.5
22.5°	153.8	215.8	393.5	445.0	606.4	755.4	796.5	822.3	847.1	850.9	851.9
25°	138.5	197.7	392.5	453.6	629.3	771.6	803.2	822.3	836.6	838.5	838.5
27.5°	124.2	177.6	388.7	455.5	646.5	775.5	800.3	813.7	820.3	824.2	824.2
30°	111.7	158.5	379.1	451.7	654.2	771.6	791.7	798.4	805.1	810.8	813.7
32.5°	102.2	140.4	364.8	444.1	655.1	762.1	776.4	780.2	789.8	803.2	807.9
35°	93.6	122.2	348.6	433.6	649.4	746.8	756.4	760.2	779.3	799.3	806.0
37.5°	85.0	108.9	327.6	415.4	640.8	728.7	735.4	742.0	771.6	795.5	803.2
40°	76.4	97.4	302.7	395.4	627.4	706.7	712.4	722.9	762.1	789.8	797.4
42.5°	69.7	87.9	276.0	374.4	610.2	681.9	690.5	705.7	750.6	780.2	788.8
45°	64.0	78.3	247.3	345.7	588.3	656.1	668.5	689.5	737.3	765.9	773.6
47.5°	58.3	71.6	217.7	316.1	564.4	630.3	646.5	670.4	719.1	746.8	753.5
50°	53.5	64.9	188.1	284.6	538.6	602.6	621.7	646.5	696.2	722.0	730.6
52.5°	49.7	59.2	160.4	253.1	509.0	574.0	595.9	621.7	668.5	693.3	699.1
55°	45.8	54.4	136.6	219.6	478.5	543.4	567.3	592.1	637.9	658.9	662.8
57.5°	43.9	50.6	116.5	188.1	446.0	509.0	535.8	558.7	601.6	617.9	621.7
60°	41.1	47.8	101.2	161.4	410.6	476.5	499.5	522.4	558.7	572.0	574.9
62.5°	38.2	45.8	89.8	135.6	374.4	438.3	461.3	482.3	512.8	522.4	526.2
65°	36.3	43.9	81.2	116.5	337.1	398.2	421.2	439.3	464.1	473.7	475.6
67.5°	34.4	42.0	74.5	100.3	299.9	358.1	375.3	392.5	411.6	421.2	422.1
70°	31.5	40.1	68.8	88.8	261.7	312.3	326.6	344.8	360.0	364.8	367.7
72.5°	29.6	37.2	64.9	80.2	222.5	268.4	281.7	292.2	305.6	310.4	310.4
75°	26.7	33.4	61.1	71.6	182.4	219.6	231.1	241.6	252.1	254.0	251.2
77.5°	23.9	29.6	52.5	60.2	142.3	173.8	183.4	189.1	197.7	199.6	200.5
80°	20.1	25.8	41.1	46.8	103.1	128.0	134.7	139.4	147.1	147.1	149.0
82.5°	15.3	20.1	29.6	33.4	69.7	87.9	93.6	96.5	101.2	101.2	101.2
85°	9.5	12.4	19.1	22.0	42.0	53.5	57.3	58.3	62.1	63.0	63.0
87.5°	4.8	6.7	12.4	13.4	22.0	27.7	27.7	29.6	29.6	28.6	27.7
90°	1.0	1.7	2.5	2.7	4.2	6.2	7.3	6.5	4.9	3.6	3.6
92.5°	3.8	10.3	16.8	18.4	26.0	36.0	41.0	35.9	25.8	18.1	17.4
95°	9.2	21.1	33.0	36.0	63.9	101.0	119.7	106.8	81.0	61.7	59.5
97.5°	15.9	26.4	36.9	39.5	86.0	148.0	179.1	170.9	154.6	142.4	138.2
100°	21.0	30.6	40.1	42.5	94.1	162.9	197.3	197.9	199.1	200.0	195.0
102.5°	25.4	34.3	43.3	45.5	97.8	167.6	202.5	212.9	233.6	249.2	244.9
105°	32.9	40.5	47.9	49.9	100.6	168.1	201.9	225.2	271.7	306.6	304.3
107.5°	40.6	47.6	54.6	56.3	101.0	160.6	190.4	222.9	287.7	336.4	337.0
110°	45.7	52.0	58.4	60.0	100.3	154.0	180.9	217.2	289.7	344.1	346.5



TEST NUMBER: P936402

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	50.8	56.8	62.8	64.4	100.3	148.2	172.2	209.3	283.5	339.2	342.8
115°	58.4	64.0	69.5	71.0	101.2	141.6	161.8	197.5	269.0	322.6	327.7
117.5°	66.0	71.1	76.1	77.4	103.1	137.4	154.6	186.9	251.4	299.8	305.4
120°	70.4	75.2	79.9	81.1	104.6	136.0	151.7	181.2	240.2	284.4	289.8
122.5°	74.7	79.5	84.2	85.5	106.8	135.2	149.5	176.0	229.1	268.9	274.3
125°	81.3	85.7	90.1	91.2	109.8	134.7	147.1	169.6	214.8	248.6	253.6
127.5°	86.6	91.1	95.5	96.6	112.8	134.3	145.1	164.5	203.2	232.3	236.5
130°	89.5	94.3	99.0	100.3	115.0	134.6	144.3	161.6	196.1	221.9	225.8
132.5°	92.5	97.3	102.1	103.2	116.7	134.7	143.6	159.1	189.9	213.2	216.6
135°	96.9	101.2	105.6	106.7	118.6	134.6	142.5	155.4	181.3	200.6	203.6
137.5°	101.4	105.7	110.0	111.1	121.5	135.3	142.3	153.2	175.1	191.5	194.0
140°	105.1	109.1	113.1	114.0	123.2	135.5	141.6	151.1	170.0	184.1	186.4
142.5°	108.0	111.6	115.3	116.2	124.7	136.0	141.6	149.9	166.6	179.0	181.0
145°	112.4	115.6	118.8	119.6	126.6	136.0	140.7	147.5	161.0	171.2	172.8
147.5°	116.8	119.9	123.0	123.8	129.4	136.9	140.7	146.0	156.7	164.7	166.0
150°	119.7	122.4	125.3	126.0	130.8	137.4	140.7	145.2	154.2	161.0	162.0
152.5°	122.6	124.7	126.8	127.4	131.8	137.7	140.7	144.5	152.2	158.1	158.8
155°	127.0	128.5	130.2	130.5	133.9	138.4	140.7	143.7	149.9	154.5	155.0
157.5°	130.3	131.8	133.3	133.7	136.0	139.1	140.7	143.1	147.8	151.4	151.7
160°	132.5	133.6	134.8	135.1	136.9	139.4	140.7	142.7	146.8	149.8	150.0
162.5°	134.7	135.5	136.5	136.7	138.0	139.8	140.7	142.4	145.8	148.4	148.6
165°	137.0	137.8	138.7	138.9	139.4	140.3	140.7	141.9	144.4	146.2	146.4
167.5°	139.2	139.6	140.0	140.1	140.6	141.2	141.6	142.4	144.0	145.3	145.4
170°	140.7	141.1	141.4	141.5	141.5	141.6	141.6	142.4	144.0	145.3	145.3
172.5°	141.4	141.5	141.6	141.6	141.6	141.6	141.6	142.3	143.5	144.5	144.4
175°	142.5	142.5	142.5	142.5	142.2	141.8	141.6	142.0	142.9	143.4	143.4
177.5°	142.5	142.5	142.5	142.5	142.3	142.0	141.8	142.1	142.8	143.2	143.2
180°	142.5	142.5	142.5	142.5	142.5	142.5	142.5	142.5	142.5	142.5	142.5



TEST NUMBER: P936402

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	297.0	297.0
2.5°	317.1	315.2
5°	407.8	409.7
7.5°	549.1	548.2
10°	682.8	691.4
12.5°	780.2	782.1
15°	839.4	843.3
17.5°	862.4	863.3
20°	863.3	861.4
22.5°	852.8	850.9
25°	840.4	839.4
27.5°	828.9	829.9
30°	824.2	827.0
32.5°	824.2	828.9
35°	826.1	830.8
37.5°	825.1	830.8
40°	821.3	828.0
42.5°	810.8	815.6
45°	794.6	800.3
47.5°	773.6	777.4
50°	746.8	750.6
52.5°	713.4	714.3
55°	673.3	677.1
57.5°	630.3	631.3
60°	582.6	585.4
62.5°	531.9	531.9
65°	478.5	480.4
67.5°	423.1	427.8
70°	366.7	367.7
72.5°	311.3	311.3
75°	254.0	255.0
77.5°	199.6	199.6
80°	148.0	149.0
82.5°	102.2	104.1
85°	64.0	64.0
87.5°	29.6	26.7
90°	3.6	3.6
92.5°	14.5	11.7
95°	50.8	42.0
97.5°	121.6	105.0
100°	175.2	155.4
102.5°	227.9	210.9
105°	295.2	286.0
107.5°	339.2	341.4
110°	355.9	365.5





TEST NUMBER: P936402

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	357.5	372.1
115°	348.0	368.2
117.5°	327.9	350.4
120°	311.7	333.5
122.5°	295.9	317.4
125°	273.4	293.3
127.5°	253.2	269.9
130°	241.2	256.7
132.5°	230.4	244.3
135°	215.6	227.6
137.5°	203.7	213.5
140°	195.5	204.7
142.5°	188.8	196.6
145°	178.7	184.6
147.5°	170.8	175.8
150°	166.0	170.0
152.5°	161.8	164.8
155°	157.0	159.0
157.5°	153.2	154.6
160°	150.9	151.7
162.5°	149.4	150.1
165°	147.3	148.0
167.5°	145.6	146.0
170°	145.3	145.3
172.5°	144.1	143.8
175°	143.4	143.4
177.5°	142.9	142.5
180°	142.5	142.5



TEST NUMBER: P936402  
 CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.25	7.41	6.99	8.18	9.10	19.39	20.55	20.13	21.32	22.24
	3H	6.98	8.02	7.73	8.80	9.76	21.24	22.28	21.99	23.06	24.01
	4H	7.29	8.28	8.06	9.06	10.03	21.89	22.87	22.66	23.66	24.63
	6H	7.56	8.47	8.34	9.27	10.25	22.32	23.23	23.10	24.03	25.01
	8H	7.64	8.50	8.43	9.32	10.31	22.44	23.31	23.24	24.13	25.11
	12H	7.66	8.49	8.46	9.30	10.32	22.51	23.34	23.32	24.15	25.17
4H	2H	13.48	14.46	14.25	15.25	16.22	19.70	20.69	20.48	21.48	22.44
	3H	15.08	15.90	15.86	16.72	17.71	21.76	22.59	22.55	23.41	24.39
	4H	15.18	15.94	15.99	16.76	17.77	22.53	23.28	23.33	24.10	25.12
	6H	15.21	15.87	16.03	16.71	17.73	23.07	23.73	23.89	24.57	25.59
	8H	15.20	15.81	16.02	16.65	17.68	23.24	23.85	24.06	24.69	25.72
	12H	15.17	15.72	16.01	16.58	17.62	23.34	23.89	24.18	24.75	25.79
8H	4H	16.64	17.26	17.47	18.10	19.13	22.62	23.23	23.44	24.07	25.10
	6H	16.90	17.41	17.75	18.29	19.32	23.25	23.76	24.10	24.64	25.67
	8H	16.92	17.37	17.79	18.25	19.30	23.46	23.92	24.33	24.79	25.84
	12H	16.90	17.30	17.77	18.17	19.28	23.61	24.01	24.48	24.88	25.99
12H	4H	16.80	17.35	17.64	18.21	19.25	22.58	23.14	23.43	24.00	25.04
	6H	17.16	17.61	18.02	18.49	19.54	23.23	23.69	24.10	24.57	25.61
	8H	17.24	17.64	18.11	18.51	19.62	23.47	23.87	24.34	24.74	25.84