

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936403

Luminaire Tested: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936403  
REPORT IS A COMBINATION OF REPORTS P933446 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4833.2 lumens  
Efficiency: N/A  
Efficacy: 107.4 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 45  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936403  
CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6

### Luminous Intensity Polar Plot

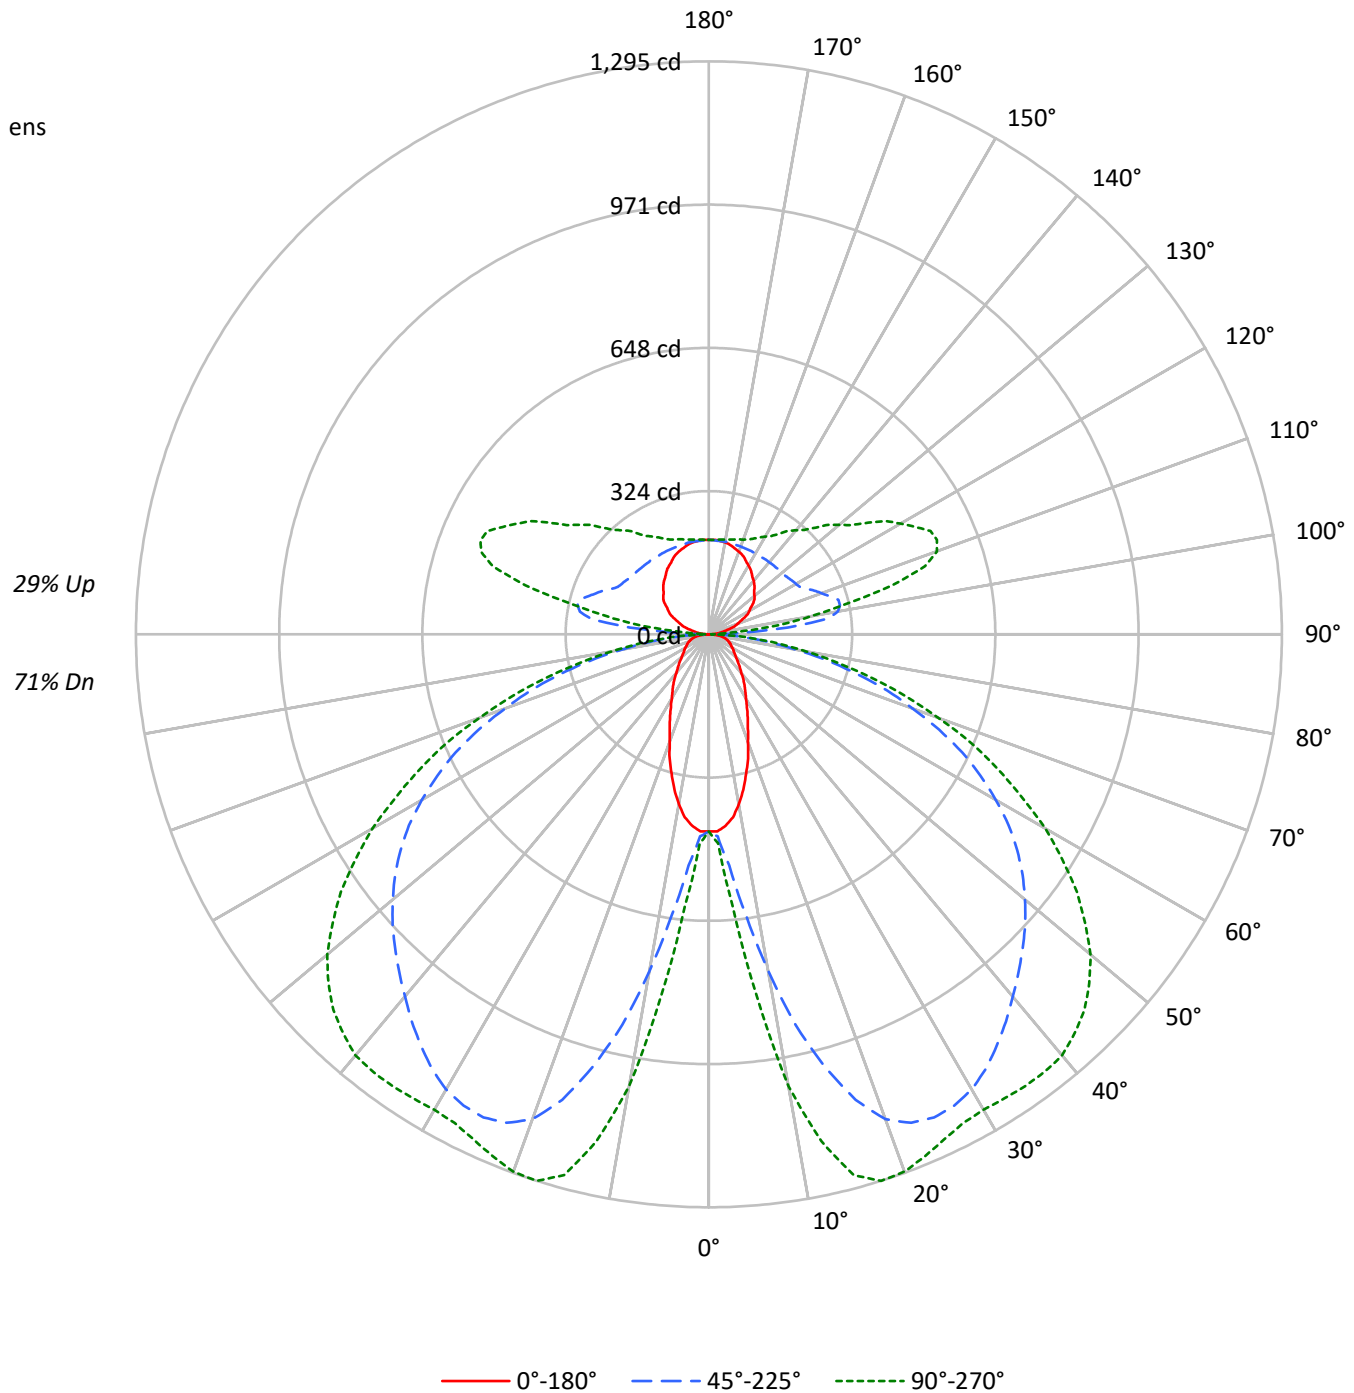



TEST NUMBER: P936403

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	71
1	102	97	93	89	96	92	88	85	82	79	77	74	71	69	66	64	62	62	62	62	58
2	92	84	77	71	87	79	73	68	71	66	62	64	60	57	57	54	51	51	51	51	48
3	83	73	65	58	79	69	62	56	62	56	51	56	51	47	50	46	43	43	43	43	39
4	76	64	55	49	71	61	53	47	55	48	43	49	44	39	44	40	36	36	36	36	33
5	69	57	48	41	65	54	46	40	49	42	37	44	38	34	39	34	31	31	31	31	28
6	64	51	42	35	60	48	40	34	43	37	32	39	33	29	35	30	27	27	27	27	24
7	59	45	37	31	55	43	35	30	39	32	27	35	30	25	32	27	23	23	23	23	21
8	54	41	33	27	51	39	31	26	36	29	24	32	26	22	29	24	21	21	21	21	18
9	51	37	29	24	48	36	28	23	32	26	21	29	24	20	26	22	18	18	18	18	16
10	47	34	26	21	45	33	25	21	30	23	19	27	22	18	24	20	16	16	16	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2756	2756	2756
5°	2691	3185	3704
10°	2440	4641	6141
15°	2073	6062	7416
20°	1687	7024	7558
25°	1407	7348	7405
30°	1186	7392	7390
35°	1048	7268	7582
40°	913	7105	7780
45°	826	6987	7810
50°	757	6880	7680
55°	725	6723	7339
60°	741	6425	6802
65°	769	5973	6063
70°	818	5205	5122
75°	902	4241	3998
80°	980	2938	2694
85°	853	1557	1379

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 7810 cd/sqm



TEST NUMBER: P936403

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	57.6	1.2
10°-20°	255.4	5.3
20°-30°	446.8	9.2
30°-40°	575.1	11.9
40°-50°	642.4	13.3
50°-60°	615.2	12.7
60°-70°	487.6	10.1
70°-80°	286.7	5.9
80°-90°	80.5	1.7
90°-100°	104.2	2.2
100°-110°	274.0	5.7
110°-120°	284.1	5.9
120°-130°	227.9	4.7
130°-140°	178.8	3.7
140°-150°	137.2	2.8
150°-160°	98.8	2.0
160°-170°	60.5	1.3
170°-180°	20.4	0.4
0°-30°	759.8	15.7
0°-40°	1335.0	27.6
0°-60°	2592.6	53.6
0°-90°	3447.3	71.3
90°-120°	662.2	13.7
90°-150°	1206.1	25.0
90°-180°	1386.0	28.7
0°-180°	4833.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	446	446	446	446	446	
5°	434	466	524	593	614	40
15°	325	600	1011	1226	1265	90
25°	208	680	1205	1258	1259	96
35°	140	650	1135	1199	1246	88
45°	96	519	1003	1149	1200	74
55°	69	330	851	988	1016	63
65°	54	175	632	710	720	54
75°	40	107	347	381	382	42
85°	14	33	86	94	96	15
90°	1	4	11	5	5	2
95°	14	54	179	92	63	15
105°	49	75	303	460	429	52
115°	88	106	243	484	552	87
125°	122	137	221	373	440	108
135°	145	160	214	301	341	112
145°	169	179	211	257	277	106
155°	190	196	211	232	238	88
165°	206	208	211	219	222	58
175°	214	214	212	215	215	20
180°	214	214	214	214	214	



TEST NUMBER: P936403  
 CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	445.5	445.5	445.5	445.5	445.5	445.5	445.5	445.5	445.5	445.5	445.5
2.5°	445.5	445.5	448.4	449.8	452.7	454.1	457.0	459.8	468.4	469.9	472.7
5°	434.0	439.8	458.4	465.6	485.6	512.8	524.3	542.9	581.6	593.1	600.2
7.5°	416.9	429.8	475.6	487.0	537.2	608.8	638.9	679.0	740.6	770.7	795.0
10°	389.6	416.9	498.5	525.7	607.4	716.2	772.1	828.0	921.1	962.6	978.4
12.5°	359.6	404.0	522.9	560.1	677.6	836.6	903.9	965.5	1071.5	1127.5	1136.1
15°	325.2	385.3	545.8	600.2	752.1	936.9	1011.3	1087.4	1186.2	1226.3	1236.3
17.5°	295.1	371.0	567.3	624.6	809.4	1027.1	1103.1	1166.2	1246.4	1273.6	1280.8
20°	257.8	348.1	581.6	656.1	869.5	1093.1	1166.2	1214.9	1269.3	1286.5	1289.3
22.5°	230.6	323.7	590.2	667.5	909.6	1133.2	1194.8	1233.5	1270.7	1276.5	1277.9
25°	207.7	296.5	588.8	680.4	944.0	1157.6	1204.8	1233.5	1255.0	1257.8	1257.8
27.5°	186.2	266.4	583.0	683.3	969.8	1163.3	1200.5	1220.6	1230.6	1236.3	1236.3
30°	167.6	237.8	568.7	677.6	981.3	1157.6	1187.6	1197.7	1207.7	1216.3	1220.6
32.5°	153.3	210.6	547.2	666.1	982.7	1143.2	1164.7	1170.4	1184.8	1204.8	1212.0
35°	140.4	183.4	522.9	650.4	974.1	1120.3	1134.6	1140.4	1169.0	1199.1	1209.1
37.5°	127.5	163.3	491.3	623.1	961.2	1093.1	1103.1	1113.1	1157.6	1193.4	1204.8
40°	114.6	146.1	454.1	593.1	941.2	1060.0	1068.6	1084.4	1143.2	1184.8	1196.2
42.5°	104.6	131.8	414.0	561.5	915.4	1022.8	1035.7	1058.6	1126.0	1170.4	1183.3
45°	96.0	117.5	371.0	518.6	882.4	984.1	1002.8	1034.3	1106.0	1149.0	1160.4
47.5°	87.4	107.4	326.6	474.2	846.6	945.4	969.8	1005.6	1078.7	1120.3	1130.3
50°	80.2	97.4	282.2	426.9	807.9	903.9	932.6	969.8	1044.3	1083.0	1096.0
52.5°	74.5	88.8	240.7	379.6	763.5	860.9	893.9	932.6	1002.8	1040.0	1048.6
55°	68.8	81.7	204.8	329.5	717.7	815.1	850.9	888.2	956.9	988.4	994.2
57.5°	65.9	75.9	174.8	282.2	669.0	763.5	803.6	838.0	902.5	926.8	932.6
60°	61.6	71.6	151.8	242.1	616.0	714.8	749.2	783.6	838.0	858.1	862.4
62.5°	57.3	68.8	134.7	203.4	561.5	657.5	691.9	723.4	769.3	783.6	789.3
65°	54.4	65.9	121.8	174.8	505.7	597.4	631.7	658.9	696.2	710.5	713.4
67.5°	51.6	63.0	111.7	150.4	449.8	537.2	563.0	588.8	617.4	631.7	633.2
70°	47.3	60.2	103.1	133.2	392.5	468.4	489.9	517.1	540.1	547.2	551.5
72.5°	44.4	55.9	97.4	120.3	333.8	402.5	422.6	438.3	458.4	465.6	465.6
75°	40.1	50.1	91.7	107.4	273.6	329.5	346.7	362.4	378.2	381.0	376.7
77.5°	35.8	44.4	78.8	90.2	213.4	260.7	275.0	283.6	296.5	299.4	300.8
80°	30.1	38.7	61.6	70.2	154.7	192.0	202.0	209.1	220.6	220.6	223.5
82.5°	22.9	30.1	44.4	50.1	104.6	131.8	140.4	144.7	151.8	151.8	151.8
85°	14.3	18.6	28.6	32.9	63.0	80.2	86.0	87.4	93.1	94.5	94.5
87.5°	7.2	10.0	18.6	20.1	32.9	41.5	41.5	44.4	44.4	43.0	41.5
90°	1.4	2.6	3.7	4.0	6.3	9.4	10.9	9.6	7.3	5.4	5.4
92.5°	5.7	15.5	25.2	27.7	39.0	54.0	61.4	53.8	38.6	27.2	26.2
95°	13.8	31.6	49.5	54.0	95.8	151.6	179.4	160.2	121.5	92.5	89.3
97.5°	23.8	39.5	55.3	59.2	129.0	222.0	268.5	256.3	232.0	213.6	207.4
100°	31.6	45.8	60.2	63.7	141.1	244.4	296.0	296.8	298.6	300.0	292.5
102.5°	38.2	51.6	64.8	68.2	146.7	251.4	303.7	319.3	350.4	373.8	367.4
105°	49.4	60.6	71.9	74.8	150.8	252.1	302.8	337.7	407.5	459.8	456.4
107.5°	60.8	71.3	81.8	84.5	151.6	240.9	285.6	334.3	431.7	504.6	505.5
110°	68.6	78.1	87.6	90.0	150.4	231.0	271.3	325.8	434.5	516.1	519.6



TEST NUMBER: P936403

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	76.2	85.3	94.3	96.6	150.4	222.3	258.2	313.9	425.3	508.7	514.2
115°	87.7	96.1	104.4	106.5	151.8	212.3	242.6	296.2	403.5	483.9	491.5
117.5°	99.0	106.6	114.1	116.0	154.6	206.1	231.9	280.3	377.0	449.6	458.0
120°	105.6	112.8	119.9	121.7	157.0	204.1	227.6	271.8	360.2	426.6	434.8
122.5°	112.0	119.3	126.4	128.3	160.2	202.9	224.2	264.1	343.7	403.5	411.6
125°	122.0	128.5	135.1	136.8	164.7	202.1	220.7	254.5	322.2	372.9	380.4
127.5°	130.0	136.6	143.2	144.9	169.1	201.5	217.6	246.7	304.8	348.4	354.7
130°	134.3	141.4	148.5	150.3	172.4	201.8	216.5	242.4	294.0	332.8	338.6
132.5°	138.8	145.9	153.0	154.8	175.1	202.1	215.5	238.7	285.0	319.6	324.8
135°	145.4	151.8	158.3	160.0	177.9	201.9	213.8	233.2	272.0	301.0	305.5
137.5°	152.1	158.5	164.9	166.6	182.2	203.1	213.5	230.0	262.7	287.3	290.9
140°	157.7	163.6	169.5	171.0	184.9	203.3	212.5	226.6	255.0	276.2	279.6
142.5°	162.0	167.4	173.0	174.3	187.0	204.0	212.5	224.9	249.8	268.5	271.4
145°	168.6	173.3	178.1	179.3	189.9	204.0	211.1	221.2	241.5	256.8	259.0
147.5°	175.1	179.8	184.5	185.7	194.2	205.4	211.1	219.1	235.0	247.1	248.9
150°	179.4	183.6	187.9	189.0	196.3	206.2	211.1	217.8	231.3	241.4	243.0
152.5°	183.9	187.1	190.3	191.1	197.8	206.7	211.1	216.8	228.3	237.0	238.2
155°	190.5	192.9	195.3	195.9	200.9	207.7	211.1	215.6	224.8	231.7	232.4
157.5°	195.4	197.7	200.0	200.5	204.1	208.8	211.1	214.6	221.8	227.1	227.7
160°	198.7	200.5	202.3	202.7	205.5	209.2	211.1	214.1	220.2	224.8	225.1
162.5°	202.0	203.3	204.7	205.0	207.0	209.7	211.1	213.6	218.8	222.7	223.0
165°	205.6	206.8	208.0	208.3	209.2	210.5	211.1	212.9	216.6	219.4	219.6
167.5°	208.9	209.4	210.0	210.2	211.0	212.0	212.5	213.7	216.1	217.9	218.0
170°	211.1	211.6	212.2	212.3	212.4	212.5	212.5	213.7	216.1	217.9	217.9
172.5°	212.2	212.3	212.5	212.5	212.5	212.5	212.5	213.4	215.4	216.8	216.7
175°	213.8	213.8	213.8	213.8	213.3	212.8	212.5	213.1	214.3	215.3	215.3
177.5°	213.8	213.8	213.8	213.8	213.4	213.0	212.8	213.3	214.2	215.0	214.9
180°	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8



TEST NUMBER: P936403

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	445.5	445.5
2.5°	475.6	472.7
5°	611.7	614.5
7.5°	823.7	822.3
10°	1024.2	1037.1
12.5°	1170.4	1173.3
15°	1259.3	1265.0
17.5°	1293.6	1295.1
20°	1295.1	1292.2
22.5°	1279.3	1276.5
25°	1260.7	1259.3
27.5°	1243.5	1244.9
30°	1236.3	1240.6
32.5°	1236.3	1243.5
35°	1239.2	1246.4
37.5°	1237.8	1246.4
40°	1232.0	1242.1
42.5°	1216.3	1223.5
45°	1191.9	1200.5
47.5°	1160.4	1166.2
50°	1120.3	1126.0
52.5°	1070.1	1071.5
55°	1009.9	1015.6
57.5°	945.4	946.9
60°	873.8	878.1
62.5°	797.9	797.9
65°	717.7	720.5
67.5°	634.6	641.8
70°	550.1	551.5
72.5°	467.0	467.0
75°	381.0	382.5
77.5°	299.4	299.4
80°	222.0	223.5
82.5°	153.3	156.1
85°	96.0	96.0
87.5°	44.4	40.1
90°	5.4	5.4
92.5°	21.8	17.5
95°	76.1	63.0
97.5°	182.4	157.4
100°	262.8	233.0
102.5°	341.9	316.4
105°	442.7	429.0
107.5°	508.7	512.1
110°	533.9	548.3





TEST NUMBER: P936403

CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	536.1	558.1
115°	521.9	552.4
117.5°	491.8	525.5
120°	467.6	500.3
122.5°	443.9	476.2
125°	410.1	439.9
127.5°	379.8	404.9
130°	361.8	385.1
132.5°	345.6	366.4
135°	323.4	341.3
137.5°	305.6	320.2
140°	293.3	307.0
142.5°	283.2	295.0
145°	268.0	277.0
147.5°	256.3	263.7
150°	249.0	255.0
152.5°	242.7	247.2
155°	235.4	238.5
157.5°	229.8	231.9
160°	226.3	227.6
162.5°	224.1	225.3
165°	220.9	222.1
167.5°	218.6	219.1
170°	217.9	217.9
172.5°	216.2	215.8
175°	215.3	215.3
177.5°	214.3	213.8
180°	213.8	213.8



TEST NUMBER: P936403  
 CATALOG NUMBER: SQ4-FB-025U-075D-B40-1D-UNV-STD-W-6

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.26	7.42	7.01	8.19	9.11	19.43	20.58	20.17	21.35	22.28
	3H	6.99	8.03	7.74	8.81	9.77	21.28	22.33	22.04	23.10	24.06
	4H	7.30	8.29	8.07	9.07	10.04	21.94	22.92	22.71	23.71	24.68
	6H	7.57	8.48	8.35	9.27	10.26	22.38	23.29	23.17	24.09	25.07
	8H	7.64	8.51	8.44	9.33	10.31	22.51	23.38	23.30	24.19	25.18
	12H	7.67	8.50	8.47	9.31	10.32	22.58	23.41	23.39	24.22	25.24
4H	2H	13.50	14.49	14.28	15.28	16.25	19.74	20.72	20.51	21.51	22.48
	3H	15.10	15.93	15.89	16.75	17.73	21.80	22.63	22.59	23.45	24.44
	4H	15.21	15.96	16.01	16.78	17.80	22.58	23.33	23.38	24.16	25.17
	6H	15.24	15.89	16.06	16.74	17.75	23.13	23.79	23.95	24.63	25.65
	8H	15.22	15.83	16.04	16.67	17.71	23.30	23.91	24.13	24.76	25.79
	12H	15.19	15.74	16.04	16.61	17.65	23.41	23.96	24.25	24.82	25.86
8H	4H	16.67	17.29	17.50	18.13	19.16	22.67	23.28	23.49	24.12	25.15
	6H	16.93	17.44	17.78	18.32	19.35	23.31	23.81	24.16	24.70	25.73
	8H	16.95	17.40	17.82	18.28	19.33	23.53	23.98	24.39	24.86	25.91
	12H	16.93	17.33	17.80	18.20	19.31	23.68	24.08	24.55	24.95	26.06
12H	4H	16.83	17.38	17.68	18.25	19.28	22.63	23.19	23.48	24.05	25.09
	6H	17.19	17.64	18.05	18.52	19.57	23.29	23.75	24.16	24.62	25.67
	8H	17.27	17.67	18.14	18.55	19.65	23.53	23.93	24.40	24.80	25.91