

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936802

Luminaire Tested: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936802
REPORT IS A COMBINATION OF REPORTS P933470 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4200.0 lumens
Efficiency: N/A
Efficacy: 115.4 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 36.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936802
CATALOG NUMBER: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

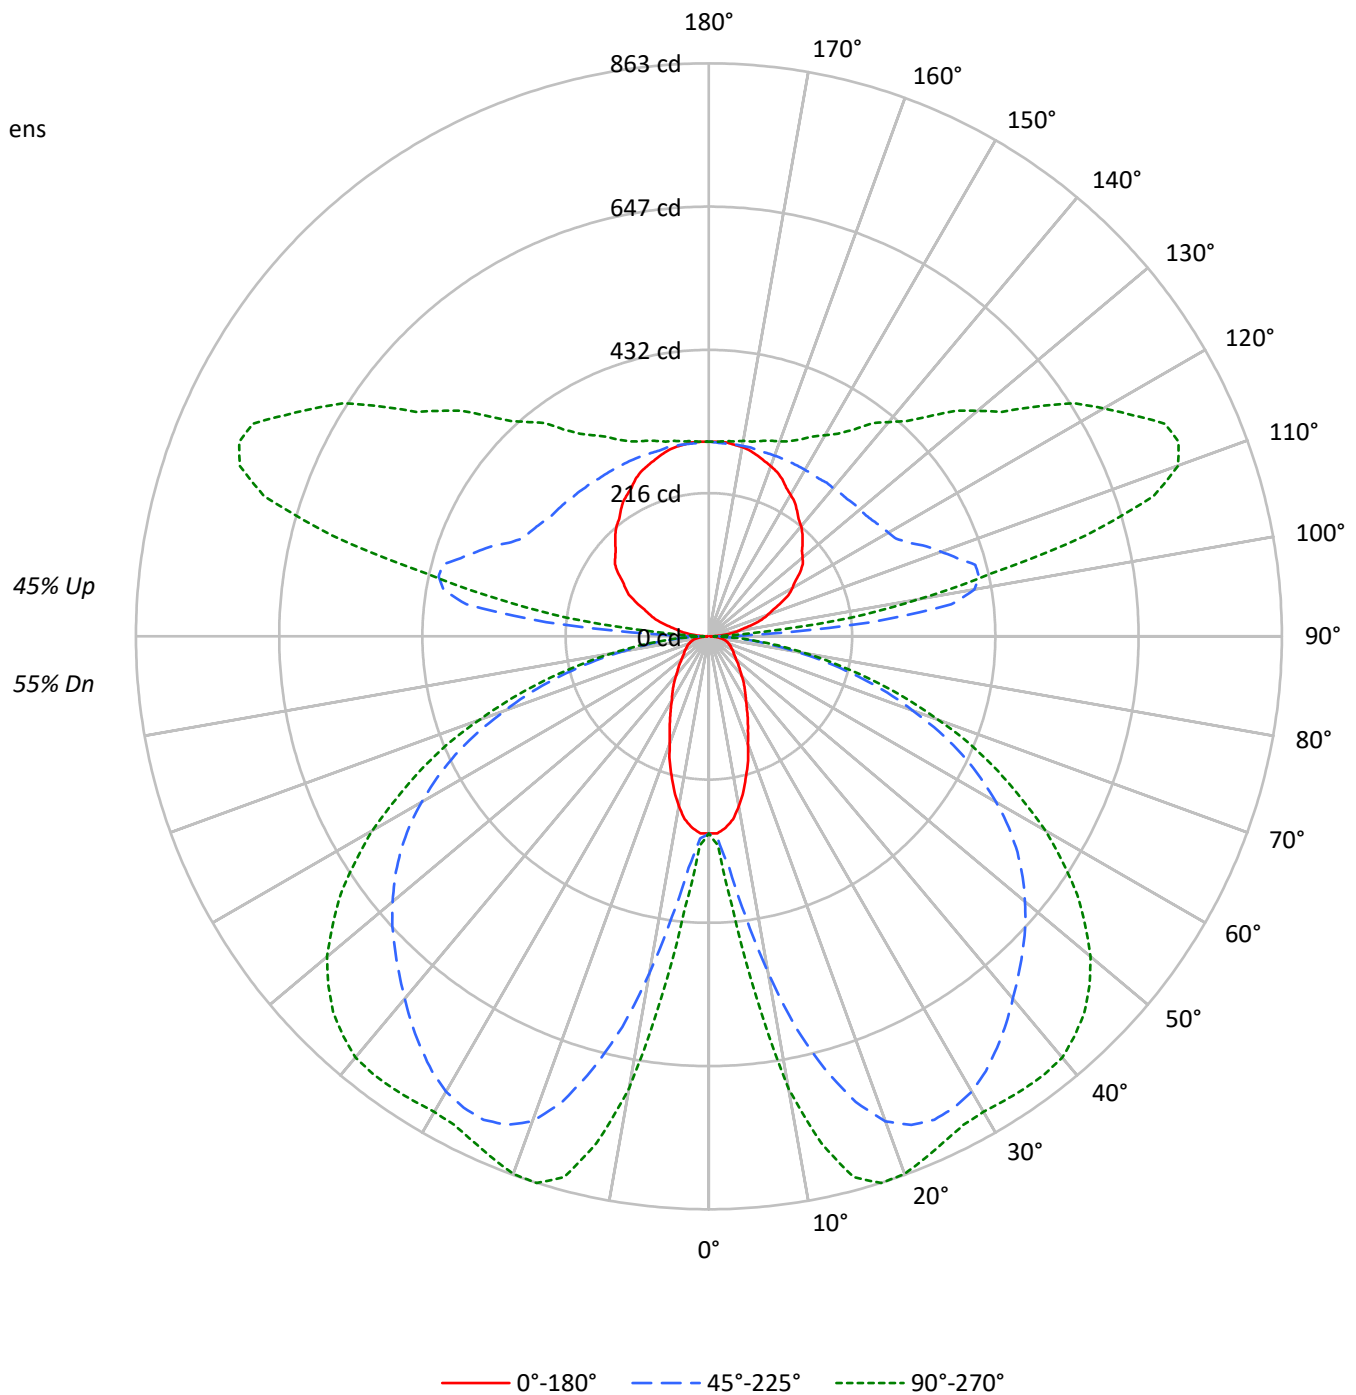



TEST NUMBER: P936802

CATALOG NUMBER: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	60	60	60	55
1	98	94	89	86	91	87	83	80	75	72	69	63	61	59	53	51	50	50	50	50	45
2	89	81	74	69	82	75	70	65	65	60	56	55	51	49	45	43	41	41	41	41	37
3	81	71	63	57	74	66	59	53	56	51	47	48	44	40	40	37	34	34	34	34	30
4	73	62	54	47	68	58	50	45	50	44	39	42	38	34	35	32	29	29	29	29	25
5	67	55	46	40	62	51	44	38	44	38	33	37	33	29	31	28	25	25	25	25	21
6	62	49	40	34	57	46	38	32	39	33	29	33	29	25	28	24	21	21	21	21	18
7	57	44	36	30	52	41	34	28	35	29	25	30	25	22	25	22	19	19	19	19	16
8	53	40	32	26	49	37	30	25	32	26	22	27	23	19	23	19	16	16	16	16	14
9	49	36	28	23	45	34	27	22	29	23	19	25	20	17	21	17	15	15	15	15	12
10	46	33	25	20	42	31	24	19	27	21	17	23	18	15	19	16	13	13	13	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2756	2756	2756
5°	2690	3183	3704
10°	2437	4636	6141
15°	2069	6053	7416
20°	1682	7009	7558
25°	1402	7330	7404
30°	1180	7370	7390
35°	1042	7242	7581
40°	906	7077	7779
45°	819	6954	7809
50°	750	6842	7680
55°	715	6682	7340
60°	731	6380	6802
65°	756	5925	6064
70°	800	5156	5123
75°	876	4193	3998
80°	941	2899	2694
85°	787	1529	1379

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 7809 cd/sqm



TEST NUMBER: P936802

CATALOG NUMBER: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.4	0.9
10°-20°	170.3	4.1
20°-30°	297.8	7.1
30°-40°	383.4	9.1
40°-50°	428.2	10.2
50°-60°	410.2	9.8
60°-70°	325.1	7.7
70°-80°	191.1	4.6
80°-90°	54.2	1.3
90°-100°	142.9	3.4
100°-110°	375.9	8.9
110°-120°	389.7	9.3
120°-130°	312.6	7.4
130°-140°	245.3	5.8
140°-150°	188.3	4.5
150°-160°	135.6	3.2
160°-170°	83.0	2.0
170°-180°	28.0	0.7
0°-30°	506.5	12.1
0°-40°	889.9	21.2
0°-60°	1728.3	41.2
0°-90°	2298.7	54.7
90°-120°	908.5	21.6
90°-150°	1654.7	39.4
90°-180°	1901.0	45.3
0°-180°	4200.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	297	297	297	297	297	
5°	289	310	350	395	410	27
15°	217	400	674	818	843	60
25°	138	454	803	838	839	64
35°	94	434	756	799	831	58
45°	64	346	668	766	800	50
55°	46	220	567	659	677	42
65°	36	116	421	474	480	36
75°	27	72	231	254	255	28
85°	10	22	57	63	64	10
90°	2	6	15	7	7	2
95°	19	74	246	127	86	21
105°	68	103	416	631	589	72
115°	120	146	333	664	758	119
125°	167	188	303	512	604	149
135°	199	220	293	413	468	154
145°	231	246	290	352	380	145
155°	261	269	290	318	327	120
165°	282	286	290	301	305	80
175°	293	293	292	295	295	28
180°	293	293	293	293	293	



TEST NUMBER: P936802

CATALOG NUMBER: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	297.0	297.0	297.0	297.0	297.0	297.0	297.0	297.0	297.0	297.0	297.0
2.5°	297.0	297.0	298.9	299.9	301.8	302.7	304.6	306.6	312.3	313.2	315.2
5°	289.4	293.2	305.6	310.4	323.7	341.9	349.5	361.9	387.7	395.4	400.1
7.5°	277.9	286.5	317.1	324.7	358.1	405.9	425.9	452.7	493.7	513.8	530.0
10°	259.8	277.9	332.3	350.5	404.9	477.5	514.7	552.0	614.1	641.8	652.3
12.5°	239.7	269.3	348.6	373.4	451.7	557.7	602.6	643.7	714.3	751.6	757.3
15°	216.8	256.9	363.9	400.1	501.4	624.6	674.2	724.8	790.7	817.5	824.2
17.5°	196.7	247.3	378.2	416.4	539.6	684.7	735.4	777.4	830.8	849.0	853.8
20°	171.9	232.1	387.7	437.4	579.7	728.7	777.4	809.8	846.1	857.6	859.5
22.5°	153.8	215.8	393.5	445.0	606.4	755.4	796.5	822.3	847.1	850.9	851.9
25°	138.5	197.7	392.5	453.6	629.3	771.6	803.2	822.3	836.6	838.5	838.5
27.5°	124.2	177.6	388.7	455.5	646.5	775.5	800.3	813.7	820.3	824.2	824.2
30°	111.7	158.5	379.1	451.7	654.2	771.6	791.7	798.4	805.1	810.8	813.7
32.5°	102.2	140.4	364.8	444.1	655.1	762.1	776.4	780.2	789.8	803.2	807.9
35°	93.6	122.2	348.6	433.6	649.4	746.8	756.4	760.2	779.3	799.3	806.0
37.5°	85.0	108.9	327.6	415.4	640.8	728.7	735.4	742.0	771.6	795.5	803.2
40°	76.4	97.4	302.7	395.4	627.4	706.7	712.4	722.9	762.1	789.8	797.4
42.5°	69.7	87.9	276.0	374.4	610.2	681.9	690.5	705.7	750.6	780.2	788.8
45°	64.0	78.3	247.3	345.7	588.3	656.1	668.5	689.5	737.3	765.9	773.6
47.5°	58.3	71.6	217.7	316.1	564.4	630.3	646.5	670.4	719.1	746.8	753.5
50°	53.5	64.9	188.1	284.6	538.6	602.6	621.7	646.5	696.2	722.0	730.6
52.5°	49.7	59.2	160.4	253.1	509.0	574.0	595.9	621.7	668.5	693.3	699.1
55°	45.8	54.4	136.6	219.6	478.5	543.4	567.3	592.1	637.9	658.9	662.8
57.5°	43.9	50.6	116.5	188.1	446.0	509.0	535.8	558.7	601.6	617.9	621.7
60°	41.1	47.8	101.2	161.4	410.6	476.5	499.5	522.4	558.7	572.0	574.9
62.5°	38.2	45.8	89.8	135.6	374.4	438.3	461.3	482.3	512.8	522.4	526.2
65°	36.3	43.9	81.2	116.5	337.1	398.2	421.2	439.3	464.1	473.7	475.6
67.5°	34.4	42.0	74.5	100.3	299.9	358.1	375.3	392.5	411.6	421.2	422.1
70°	31.5	40.1	68.8	88.8	261.7	312.3	326.6	344.8	360.0	364.8	367.7
72.5°	29.6	37.2	64.9	80.2	222.5	268.4	281.7	292.2	305.6	310.4	310.4
75°	26.7	33.4	61.1	71.6	182.4	219.6	231.1	241.6	252.1	254.0	251.2
77.5°	23.9	29.6	52.5	60.2	142.3	173.8	183.4	189.1	197.7	199.6	200.5
80°	20.1	25.8	41.1	46.8	103.1	128.0	134.7	139.4	147.1	147.1	149.0
82.5°	15.3	20.1	29.6	33.4	69.7	87.9	93.6	96.5	101.2	101.2	101.2
85°	9.5	12.4	19.1	22.0	42.0	53.5	57.3	58.3	62.1	63.0	63.0
87.5°	4.8	6.7	12.4	13.4	22.0	27.7	27.7	29.6	29.6	28.6	27.7
90°	2.0	3.5	5.2	5.5	8.7	12.9	15.0	13.3	9.9	7.4	7.4
92.5°	7.8	21.2	34.7	38.0	53.4	73.9	84.2	73.8	53.0	37.4	35.9
95°	18.9	43.4	67.9	74.0	131.4	207.9	246.2	219.6	166.6	126.9	122.4
97.5°	32.7	54.2	75.8	81.3	177.0	304.6	368.4	351.7	318.2	293.1	284.5
100°	43.3	62.8	82.5	87.4	193.6	335.2	406.1	407.3	409.8	411.6	401.4
102.5°	52.3	70.7	88.9	93.5	201.2	344.9	416.7	438.1	480.7	512.7	504.0
105°	67.7	83.2	98.7	102.6	206.9	346.0	415.5	463.4	559.1	630.9	626.2
107.5°	83.5	97.9	112.3	115.9	207.9	330.6	391.9	458.7	592.2	692.3	693.4
110°	94.1	107.1	120.1	123.4	206.4	317.0	372.3	446.8	596.1	708.0	712.9



TEST NUMBER: P936802

CATALOG NUMBER: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	104.5	116.9	129.3	132.5	206.4	305.0	354.3	430.7	583.4	698.0	705.6
115°	120.2	131.7	143.2	146.0	208.3	291.3	332.8	406.4	553.5	663.9	674.3
117.5°	135.8	146.2	156.6	159.2	212.2	282.8	318.1	384.5	517.2	616.8	628.4
120°	144.9	154.7	164.5	166.9	215.4	279.9	312.2	372.8	494.2	585.2	596.5
122.5°	153.8	163.7	173.5	176.0	219.8	278.4	307.6	362.2	471.6	553.5	564.6
125°	167.3	176.3	185.3	187.6	226.0	277.1	302.7	349.1	442.0	511.6	521.8
127.5°	178.3	187.5	196.5	198.8	232.1	276.5	298.6	338.5	418.1	477.9	486.5
130°	184.2	194.1	203.8	206.3	236.6	276.9	297.0	332.5	403.5	456.7	464.6
132.5°	190.3	200.2	209.9	212.4	240.2	277.1	295.7	327.4	390.9	438.5	445.7
135°	199.4	208.3	217.3	219.5	244.1	276.9	293.3	319.8	373.0	412.9	419.1
137.5°	208.7	217.5	226.3	228.5	250.0	278.6	292.9	315.3	360.3	394.0	399.1
140°	216.3	224.4	232.6	234.6	253.6	278.9	291.5	310.9	349.8	378.9	383.6
142.5°	222.2	229.8	237.2	239.1	256.6	279.8	291.5	308.6	342.7	368.2	372.3
145°	231.3	237.8	244.4	246.0	260.5	279.9	289.6	303.5	331.4	352.3	355.4
147.5°	240.4	246.8	253.1	254.7	266.3	281.8	289.6	300.5	322.5	338.9	341.5
150°	246.2	251.9	257.8	259.2	269.3	282.8	289.6	298.8	317.3	331.3	333.4
152.5°	252.3	256.7	261.1	262.1	271.3	283.4	289.6	297.5	313.3	325.2	326.7
155°	261.4	264.6	267.9	268.6	275.6	284.9	289.6	295.9	308.5	317.9	319.0
157.5°	268.1	271.2	274.4	275.1	279.9	286.3	289.6	294.4	304.3	311.6	312.4
160°	272.7	275.0	277.5	278.1	281.9	287.0	289.6	293.8	302.2	308.5	308.8
162.5°	277.1	279.0	280.8	281.2	284.0	287.7	289.6	293.1	300.2	305.5	305.9
165°	282.1	283.7	285.4	285.8	287.1	288.7	289.6	292.0	297.1	300.9	301.3
167.5°	286.6	287.4	288.1	288.3	289.4	290.8	291.5	293.2	296.5	299.0	299.2
170°	289.6	290.3	291.1	291.3	291.4	291.5	291.5	293.2	296.5	299.0	299.0
172.5°	291.1	291.3	291.5	291.5	291.5	291.5	291.5	292.8	295.4	297.4	297.2
175°	293.3	293.3	293.3	293.3	292.7	291.8	291.5	292.3	294.0	295.3	295.3
177.5°	293.3	293.3	293.3	293.3	292.8	292.2	291.9	292.6	293.9	294.9	294.7
180°	293.3	293.3	293.3	293.3	293.3	293.3	293.3	293.3	293.3	293.3	293.3



TEST NUMBER: P936802

CATALOG NUMBER: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	297.0	297.0
2.5°	317.1	315.2
5°	407.8	409.7
7.5°	549.1	548.2
10°	682.8	691.4
12.5°	780.2	782.1
15°	839.4	843.3
17.5°	862.4	863.3
20°	863.3	861.4
22.5°	852.8	850.9
25°	840.4	839.4
27.5°	828.9	829.9
30°	824.2	827.0
32.5°	824.2	828.9
35°	826.1	830.8
37.5°	825.1	830.8
40°	821.3	828.0
42.5°	810.8	815.6
45°	794.6	800.3
47.5°	773.6	777.4
50°	746.8	750.6
52.5°	713.4	714.3
55°	673.3	677.1
57.5°	630.3	631.3
60°	582.6	585.4
62.5°	531.9	531.9
65°	478.5	480.4
67.5°	423.1	427.8
70°	366.7	367.7
72.5°	311.3	311.3
75°	254.0	255.0
77.5°	199.6	199.6
80°	148.0	149.0
82.5°	102.2	104.1
85°	64.0	64.0
87.5°	29.6	26.7
90°	7.4	7.4
92.5°	30.0	24.0
95°	104.4	86.4
97.5°	250.2	215.9
100°	360.5	319.6
102.5°	469.0	434.0
105°	607.4	588.6
107.5°	697.9	702.5
110°	732.5	752.1



TEST NUMBER: P936802

CATALOG NUMBER: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	735.6	765.7
115°	716.1	757.8
117.5°	674.7	721.0
120°	641.4	686.4
122.5°	609.0	653.3
125°	562.6	603.5
127.5°	521.0	555.4
130°	496.5	528.3
132.5°	474.2	502.7
135°	443.7	468.2
137.5°	419.1	439.3
140°	402.4	421.3
142.5°	388.5	404.7
145°	367.7	379.9
147.5°	351.6	361.8
150°	341.6	349.8
152.5°	332.9	339.1
155°	323.1	327.2
157.5°	315.2	318.1
160°	310.6	312.2
162.5°	307.5	309.0
165°	303.0	304.7
167.5°	299.9	300.5
170°	299.0	299.0
172.5°	296.6	296.0
175°	295.3	295.3
177.5°	294.0	293.3
180°	293.3	293.3



TEST NUMBER: P936802
 CATALOG NUMBER: SQ4-FB-050U-075D-B40-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.93	5.88	5.84	6.81	8.01	18.07	19.02	18.98	19.95	21.15
	3H	5.65	6.50	6.56	7.44	8.66	19.90	20.76	20.82	21.70	22.92
	4H	5.95	6.76	6.88	7.70	8.93	20.54	21.35	21.48	22.30	23.53
	6H	6.20	6.95	7.15	7.90	9.15	20.97	21.71	21.91	22.66	23.91
	8H	6.28	6.99	7.23	7.96	9.20	21.08	21.79	22.03	22.76	24.01
	12H	6.30	6.97	7.25	7.94	9.21	21.15	21.82	22.10	22.79	24.06
4H	2H	12.14	12.94	13.07	13.89	15.12	18.36	19.17	19.30	20.11	21.35
	3H	13.71	14.39	14.66	15.37	16.61	20.40	21.08	21.35	22.05	23.30
	4H	13.81	14.43	14.77	15.40	16.67	21.16	21.78	22.12	22.75	24.02
	6H	13.83	14.36	14.80	15.36	16.63	21.69	22.23	22.66	23.22	24.49
	8H	13.81	14.31	14.78	15.30	16.58	21.85	22.35	22.82	23.34	24.62
	12H	13.77	14.22	14.76	15.23	16.52	21.94	22.39	22.93	23.39	24.69
8H	4H	15.25	15.76	16.23	16.74	18.03	21.23	21.73	22.20	22.72	24.00
	6H	15.50	15.92	16.50	16.95	18.23	21.85	22.26	22.85	23.29	24.58
	8H	15.52	15.89	16.53	16.90	18.21	22.06	22.43	23.07	23.45	24.75
	12H	15.49	15.82	16.51	16.83	18.17	22.20	22.52	23.22	23.54	24.88
12H	4H	15.40	15.85	16.39	16.86	18.15	21.18	21.64	22.18	22.64	23.93
	6H	15.76	16.12	16.77	17.14	18.44	21.83	22.20	22.84	23.22	24.52
	8H	15.83	16.15	16.84	17.17	18.51	22.06	22.38	23.07	23.39	24.74