

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937803

Luminaire Tested: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937803
REPORT IS A COMBINATION OF REPORTS P933576 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11590.8 lumens
Efficiency: N/A
Efficacy: 112.3 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 103.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937803
CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6

Luminous Intensity Polar Plot

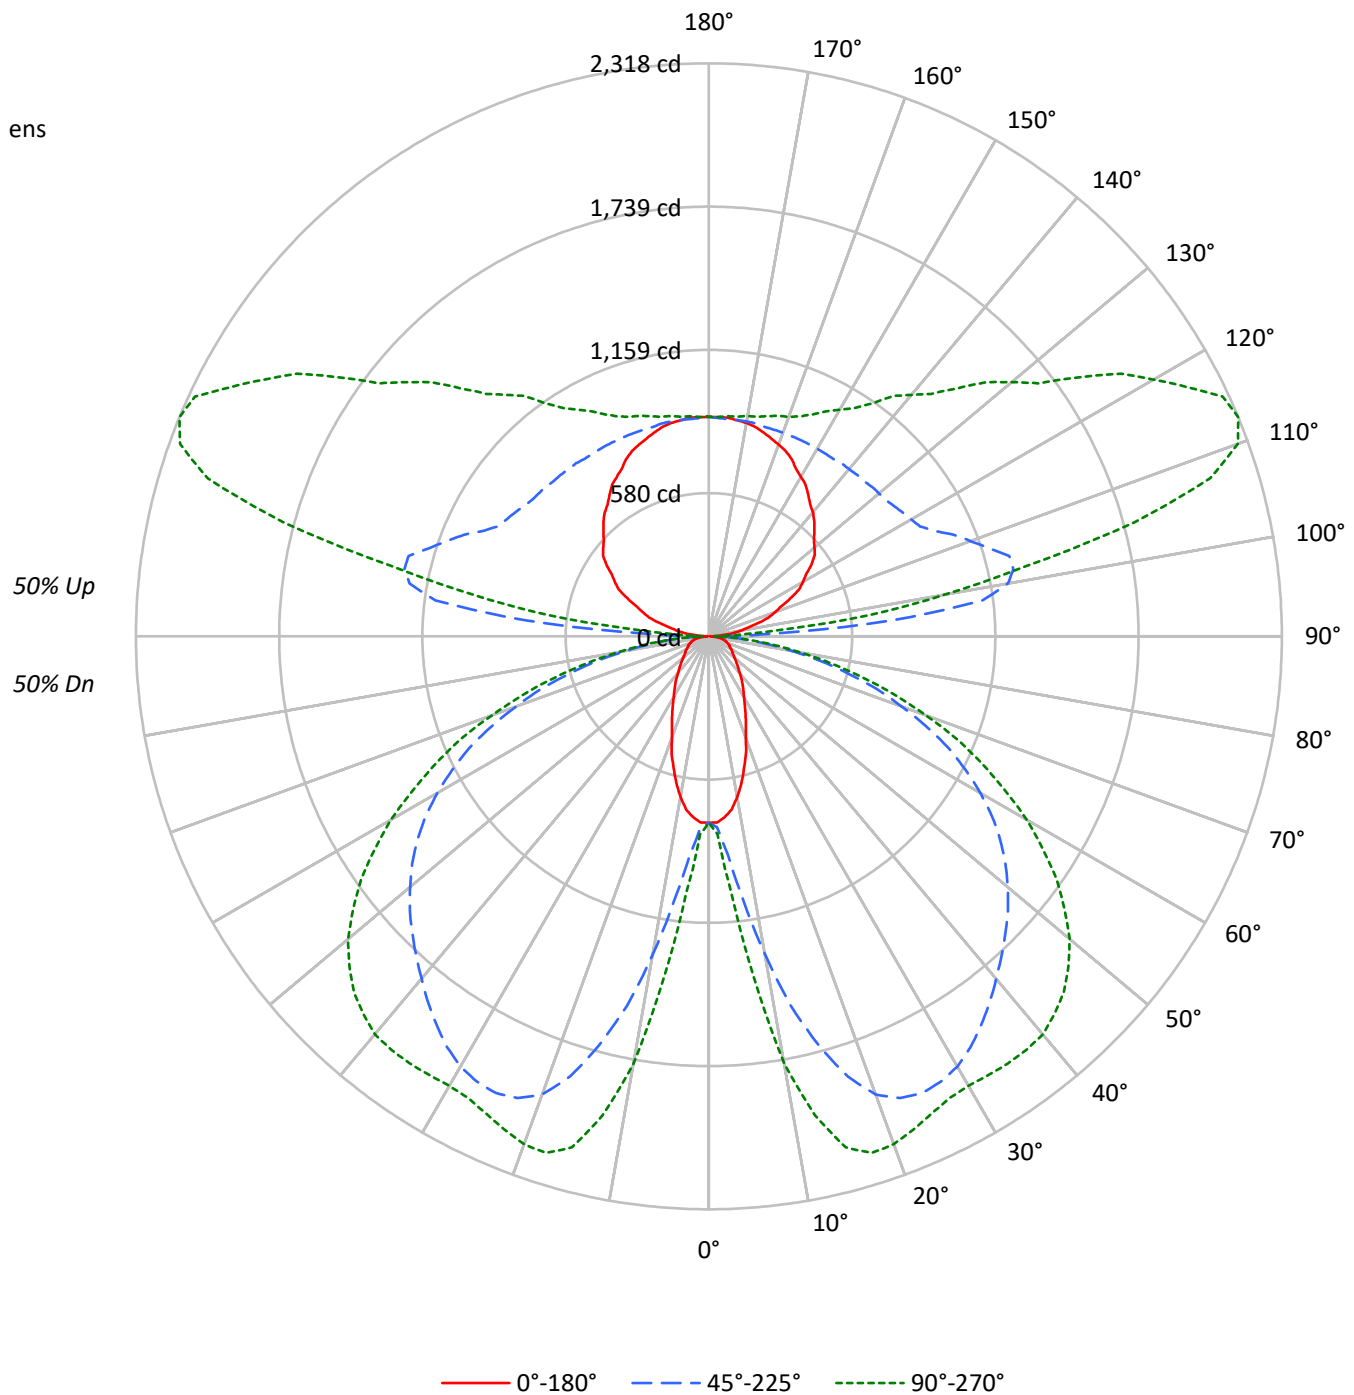



TEST NUMBER: P937803

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	84	84	84	69	69	69	56	56	56	56	56	56	50
1	97	93	89	85	90	86	82	79	72	70	67	60	58	57	49	48	47	49	48	47	41
2	88	80	74	68	81	74	69	64	63	59	55	52	49	46	42	40	38	42	40	38	34
3	80	70	62	56	73	65	58	53	55	50	45	46	42	39	37	34	32	37	34	32	28
4	73	62	53	47	67	57	50	44	48	43	38	40	36	32	33	30	27	33	30	27	23
5	67	54	46	40	61	50	43	37	43	37	32	36	31	28	29	26	23	29	26	23	20
6	61	49	40	34	56	45	37	32	38	32	28	32	27	24	26	23	20	26	23	20	17
7	56	44	35	30	52	40	33	28	34	29	24	29	24	21	24	20	17	24	20	17	15
8	52	39	31	26	48	37	29	24	31	25	21	26	22	18	22	18	15	22	18	15	13
9	48	36	28	23	44	33	26	21	28	23	19	24	19	16	20	16	14	20	16	14	11
10	45	33	25	20	41	30	24	19	26	21	17	22	18	15	18	15	12	18	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4664	4664	4664
5°	4554	5389	6269
10°	4129	7854	10393
15°	3509	10258	12549
20°	2855	11884	12790
25°	2381	12433	12529
30°	2006	12509	12506
35°	1774	12298	12829
40°	1545	12025	13163
45°	1397	11823	13215
50°	1281	11641	12996
55°	1225	11377	12420
60°	1253	10873	11511
65°	1303	10107	10260
70°	1384	8808	8668
75°	1528	7177	6764
80°	1657	4971	4559
85°	1449	2632	2333

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 13215 cd/sqm



TEST NUMBER: P937803

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.5	0.8
10°-20°	432.2	3.7
20°-30°	756.0	6.5
30°-40°	973.2	8.4
40°-50°	1087.0	9.4
50°-60°	1041.1	9.0
60°-70°	825.1	7.1
70°-80°	485.2	4.2
80°-90°	138.2	1.2
90°-100°	432.8	3.7
100°-110°	1137.7	9.8
110°-120°	1179.7	10.2
120°-130°	946.3	8.2
130°-140°	742.5	6.4
140°-150°	569.9	4.9
150°-160°	410.4	3.5
160°-170°	251.1	2.2
170°-180°	84.8	0.7
0°-30°	1285.7	11.1
0°-40°	2259.0	19.5
0°-60°	4387.1	37.8
0°-90°	5835.6	50.3
90°-120°	2750.2	23.7
90°-150°	5008.9	43.2
90°-180°	5755.0	49.7
0°-180°	11590.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	754	754	754	754	754	
5°	734	788	887	1004	1040	68
15°	550	1016	1712	2075	2140	153
25°	352	1151	2039	2128	2131	162
35°	238	1100	1920	2029	2109	148
45°	162	878	1697	1944	2031	126
55°	116	558	1440	1673	1719	106
65°	92	296	1069	1202	1219	91
75°	68	182	587	645	647	71
85°	24	56	145	160	162	26
90°	6	17	45	23	23	7
95°	57	224	745	384	262	64
105°	205	310	1258	1910	1782	217
115°	364	442	1008	2010	2294	360
125°	506	568	916	1549	1827	450
135°	604	664	888	1250	1418	467
145°	700	745	876	1066	1150	439
155°	791	813	876	962	990	364
165°	854	865	876	911	922	241
175°	888	888	882	894	894	84
180°	888	888	888	888	888	



TEST NUMBER: P937803

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	753.9	753.9	753.9	753.9	753.9	753.9	753.9	753.9	753.9	753.9	753.9
2.5°	753.9	753.9	758.7	761.1	766.0	768.5	773.3	778.1	792.6	795.1	800.0
5°	734.5	744.2	775.7	787.9	821.8	867.8	887.2	918.7	984.2	1003.6	1015.7
7.5°	705.5	727.2	804.8	824.2	909.1	1030.3	1081.2	1149.1	1253.2	1304.1	1345.4
10°	659.3	705.5	843.6	889.7	1027.9	1212.1	1306.6	1401.2	1558.8	1629.0	1655.7
12.5°	608.4	683.6	884.8	947.8	1146.6	1415.7	1529.6	1633.8	1813.3	1907.8	1922.3
15°	550.3	652.1	923.6	1015.7	1272.6	1585.4	1711.5	1839.9	2007.2	2075.0	2092.0
17.5°	499.4	627.8	960.0	1056.9	1369.7	1738.1	1866.5	1973.2	2109.0	2155.1	2167.2
20°	436.3	589.0	984.2	1110.3	1471.5	1849.6	1973.2	2055.6	2147.8	2176.8	2181.7
22.5°	390.3	547.9	998.7	1129.7	1539.4	1917.4	2021.7	2087.2	2150.2	2159.9	2162.3
25°	351.5	501.8	996.4	1151.4	1597.5	1958.7	2038.7	2087.2	2123.5	2128.4	2128.4
27.5°	315.2	450.9	986.6	1156.3	1641.2	1968.4	2031.4	2065.4	2082.3	2092.0	2092.0
30°	283.6	402.4	962.4	1146.6	1660.6	1958.7	2009.6	2026.6	2043.5	2058.1	2065.4
32.5°	259.4	356.3	926.0	1127.2	1662.9	1934.4	1970.8	1980.5	2004.7	2038.7	2050.8
35°	237.6	310.3	884.8	1100.5	1648.4	1895.7	1919.9	1929.6	1978.1	2029.0	2046.0
37.5°	215.7	276.4	831.5	1054.5	1626.6	1849.6	1866.5	1883.5	1958.7	2019.3	2038.7
40°	194.0	247.2	768.5	1003.6	1592.7	1793.9	1808.4	1835.0	1934.4	2004.7	2024.1
42.5°	177.0	223.0	700.6	950.2	1549.0	1730.8	1752.6	1791.4	1905.3	1980.5	2002.3
45°	162.4	198.7	627.8	877.5	1493.2	1665.3	1696.8	1750.2	1871.4	1944.2	1963.6
47.5°	147.8	181.8	552.7	802.4	1432.7	1599.9	1641.2	1701.7	1825.4	1895.7	1912.7
50°	135.7	164.8	477.6	722.4	1367.2	1529.6	1578.1	1641.2	1767.2	1832.6	1854.4
52.5°	126.1	150.3	407.2	642.4	1292.0	1456.9	1512.6	1578.1	1696.8	1759.9	1774.5
55°	116.3	138.2	346.7	557.5	1214.5	1379.3	1439.9	1503.0	1619.3	1672.7	1682.3
57.5°	111.5	128.4	295.8	477.6	1132.1	1292.0	1359.9	1418.1	1527.2	1568.4	1578.1
60°	104.2	121.2	257.0	409.7	1042.4	1209.6	1267.9	1326.0	1418.1	1452.1	1459.3
62.5°	96.9	116.3	227.9	344.2	950.2	1112.7	1170.8	1224.2	1301.8	1326.0	1335.7
65°	92.2	111.5	206.1	295.8	855.7	1010.9	1069.0	1115.1	1178.1	1202.3	1207.2
67.5°	87.3	106.7	189.1	254.5	761.1	909.1	952.7	996.4	1044.8	1069.0	1071.5
70°	80.0	101.8	174.6	225.5	664.2	792.6	829.0	875.1	913.9	926.0	933.3
72.5°	75.2	94.5	164.8	203.6	564.8	681.2	715.1	741.7	775.7	787.9	787.9
75°	67.9	84.8	155.2	181.8	463.0	557.5	586.7	613.3	639.9	644.8	637.6
77.5°	60.6	75.2	133.3	152.7	361.2	441.2	465.5	480.0	501.8	506.6	509.1
80°	50.9	65.4	104.2	118.8	261.8	324.8	341.8	353.9	373.3	373.3	378.2
82.5°	38.8	50.9	75.2	84.8	177.0	223.0	237.6	244.9	257.0	257.0	257.0
85°	24.3	31.5	48.5	55.8	106.7	135.7	145.4	147.8	157.6	160.0	160.0
87.5°	12.1	17.0	31.5	33.9	55.8	70.3	70.3	75.2	75.2	72.8	70.3
90°	5.9	10.7	15.5	16.7	26.3	39.0	45.3	40.2	30.2	22.6	22.6
92.5°	23.9	64.4	104.9	115.0	161.7	223.9	255.0	223.5	160.4	113.2	108.7
95°	57.2	131.3	205.5	224.0	397.9	629.5	745.4	665.2	504.6	384.3	370.6
97.5°	98.9	164.4	229.8	246.1	535.9	922.2	1115.4	1064.7	963.3	887.2	861.2
100°	131.1	190.4	249.7	264.5	586.1	1014.8	1229.2	1232.9	1240.4	1245.9	1215.0
102.5°	158.5	213.9	269.2	283.1	609.2	1044.0	1261.4	1326.0	1455.2	1552.2	1525.7
105°	204.9	251.8	298.7	310.5	626.3	1047.3	1257.8	1402.7	1692.4	1909.6	1895.4
107.5°	252.6	296.3	340.1	351.0	629.4	1000.6	1186.3	1388.4	1792.4	2095.6	2099.0
110°	284.8	324.2	363.8	373.6	624.7	959.4	1126.7	1352.6	1804.4	2143.2	2158.0



TEST NUMBER: P937803

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	316.4	354.0	391.6	401.0	624.9	923.3	1072.5	1303.7	1766.1	2112.8	2135.6
115°	364.0	398.7	433.4	442.1	630.6	881.8	1007.5	1230.2	1675.7	2009.8	2041.4
117.5°	411.1	442.6	474.2	482.0	642.2	856.0	962.8	1163.9	1565.8	1867.3	1902.4
120°	438.5	468.2	497.8	505.3	651.9	847.3	945.0	1128.6	1495.9	1771.4	1805.4
122.5°	465.4	495.3	525.2	532.7	665.5	842.7	931.3	1096.7	1427.4	1675.5	1709.1
125°	506.4	533.7	561.1	567.8	684.1	839.0	916.4	1056.9	1337.9	1548.6	1579.6
127.5°	539.9	567.4	595.0	601.8	702.5	836.8	903.9	1024.5	1265.8	1446.7	1472.8
130°	557.7	587.4	617.0	624.5	716.1	838.1	899.1	1006.5	1221.3	1382.4	1406.4
132.5°	576.2	605.9	635.5	642.9	726.9	839.0	894.9	991.1	1183.3	1327.5	1349.1
135°	603.6	630.6	657.6	664.4	738.9	838.1	887.8	968.3	1129.3	1250.1	1268.7
137.5°	631.5	658.3	685.1	691.8	756.7	843.4	886.6	954.7	1090.8	1192.9	1208.1
140°	654.8	679.5	704.1	710.2	767.6	844.1	882.4	941.2	1058.8	1147.0	1161.2
142.5°	672.7	695.5	718.3	724.0	776.8	847.2	882.4	934.1	1037.3	1114.8	1127.0
145°	700.1	720.0	739.8	744.8	788.7	847.3	876.5	918.7	1003.2	1066.5	1075.8
147.5°	727.5	746.8	766.1	771.0	806.1	853.0	876.5	909.7	976.2	1026.1	1033.7
150°	745.4	762.9	780.3	784.7	815.3	856.1	876.5	904.6	960.6	1002.8	1009.0
152.5°	763.9	777.2	790.4	793.7	821.3	858.1	876.5	900.5	948.4	984.3	989.0
155°	791.3	801.1	810.8	813.3	834.4	862.5	876.5	895.6	933.7	962.3	965.4
157.5°	811.6	821.1	830.6	833.0	847.5	866.9	876.5	891.3	921.0	943.3	945.4
160°	825.2	832.7	840.1	841.9	853.5	868.9	876.5	889.2	914.6	933.7	934.9
162.5°	839.0	844.5	850.0	851.5	859.8	871.0	876.5	887.2	908.7	924.7	925.9
165°	853.9	858.8	863.9	865.1	869.0	874.0	876.5	884.1	899.5	911.1	912.3
167.5°	867.5	869.9	872.3	872.9	876.0	880.3	882.4	887.5	897.5	905.1	905.6
170°	876.5	878.9	881.3	881.8	882.0	882.3	882.4	887.5	897.5	905.1	905.1
172.5°	881.3	881.8	882.3	882.4	882.4	882.4	882.4	886.4	894.4	900.3	899.8
175°	887.8	887.8	887.8	887.8	886.0	883.6	882.4	884.9	890.0	893.8	893.8
177.5°	887.8	887.8	887.8	887.8	886.4	884.6	883.7	885.7	889.6	892.5	892.0
180°	887.8	887.8	887.8	887.8	887.8	887.8	887.8	887.8	887.8	887.8	887.8



TEST NUMBER: P937803

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	753.9	753.9
2.5°	804.8	800.0
5°	1035.1	1040.0
7.5°	1393.9	1391.4
10°	1733.2	1755.1
12.5°	1980.5	1985.3
15°	2130.8	2140.5
17.5°	2189.0	2191.4
20°	2191.4	2186.6
22.5°	2164.7	2159.9
25°	2133.2	2130.8
27.5°	2104.2	2106.5
30°	2092.0	2099.3
32.5°	2092.0	2104.2
35°	2096.9	2109.0
37.5°	2094.4	2109.0
40°	2084.8	2101.7
42.5°	2058.1	2070.2
45°	2016.9	2031.4
47.5°	1963.6	1973.2
50°	1895.7	1905.3
52.5°	1810.8	1813.3
55°	1709.0	1718.7
57.5°	1599.9	1602.3
60°	1478.7	1486.0
62.5°	1350.3	1350.3
65°	1214.5	1219.3
67.5°	1073.9	1086.0
70°	930.8	933.3
72.5°	790.3	790.3
75°	644.8	647.2
77.5°	506.6	506.6
80°	375.7	378.2
82.5°	259.4	264.2
85°	162.4	162.4
87.5°	75.2	67.9
90°	22.6	22.6
92.5°	90.6	72.7
95°	316.1	261.6
97.5°	757.4	653.6
100°	1091.3	967.6
102.5°	1419.7	1313.8
105°	1838.5	1781.6
107.5°	2112.8	2126.6
110°	2217.4	2276.7



TEST NUMBER: P937803

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	2226.7	2317.8
115°	2167.7	2294.0
117.5°	2042.5	2182.6
120°	1941.6	2077.7
122.5°	1843.3	1977.6
125°	1703.1	1826.8
127.5°	1577.2	1681.5
130°	1502.9	1599.2
132.5°	1435.5	1521.8
135°	1343.1	1417.5
137.5°	1269.0	1329.9
140°	1218.2	1275.1
142.5°	1176.1	1225.1
145°	1113.0	1150.0
147.5°	1064.4	1095.2
150°	1033.9	1058.8
152.5°	1007.8	1026.6
155°	977.8	990.2
157.5°	954.1	962.8
160°	940.0	945.0
162.5°	930.6	935.4
165°	917.4	922.3
167.5°	907.7	909.8
170°	905.1	905.1
172.5°	898.0	896.2
175°	893.8	893.8
177.5°	889.9	887.8
180°	887.8	887.8



TEST NUMBER: P937803
 CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-6

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.38	7.29	7.33	8.25	9.52	19.55	20.45	20.49	21.42	22.68
	3H	7.09	7.90	8.05	8.88	10.17	21.39	22.20	22.34	23.17	24.46
	4H	7.39	8.16	8.36	9.14	10.44	22.03	22.80	23.00	23.78	25.07
	6H	7.65	8.36	8.63	9.34	10.65	22.46	23.17	23.44	24.15	25.46
	8H	7.71	8.39	8.70	9.39	10.70	22.58	23.25	23.57	24.26	25.56
	12H	7.73	8.38	8.73	9.38	10.71	22.64	23.29	23.64	24.29	25.62
4H	2H	13.59	14.36	14.57	15.35	16.64	19.83	20.60	20.80	21.58	22.87
	3H	15.17	15.81	16.15	16.82	18.13	21.87	22.52	22.86	23.53	24.83
	4H	15.26	15.85	16.26	16.86	18.19	22.64	23.23	23.63	24.23	25.56
	6H	15.28	15.79	16.28	16.81	18.14	23.17	23.68	24.18	24.71	26.04
	8H	15.26	15.73	16.26	16.75	18.10	23.34	23.81	24.35	24.83	26.18
	12H	15.21	15.64	16.24	16.68	18.03	23.43	23.86	24.46	24.89	26.24
8H	4H	16.71	17.18	17.72	18.21	19.55	22.70	23.18	23.71	24.20	25.54
	6H	16.95	17.35	17.99	18.41	19.75	23.33	23.72	24.36	24.79	26.13
	8H	16.97	17.32	18.01	18.37	19.73	23.55	23.89	24.59	24.94	26.30
	12H	16.94	17.25	17.99	18.29	19.69	23.69	24.00	24.74	25.04	26.44
12H	4H	16.85	17.28	17.88	18.32	19.67	22.66	23.09	23.69	24.12	25.47
	6H	17.21	17.56	18.25	18.61	19.97	23.31	23.66	24.35	24.71	26.07
	8H	17.28	17.59	18.33	18.63	20.03	23.54	23.85	24.59	24.89	26.29