

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938302

Luminaire Tested: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P938302  
REPORT IS A COMBINATION OF REPORTS P933629 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7298.1 lumens  
Efficiency: N/A  
Efficacy: 131.3 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 55.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P938302  
CATALOG NUMBER: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

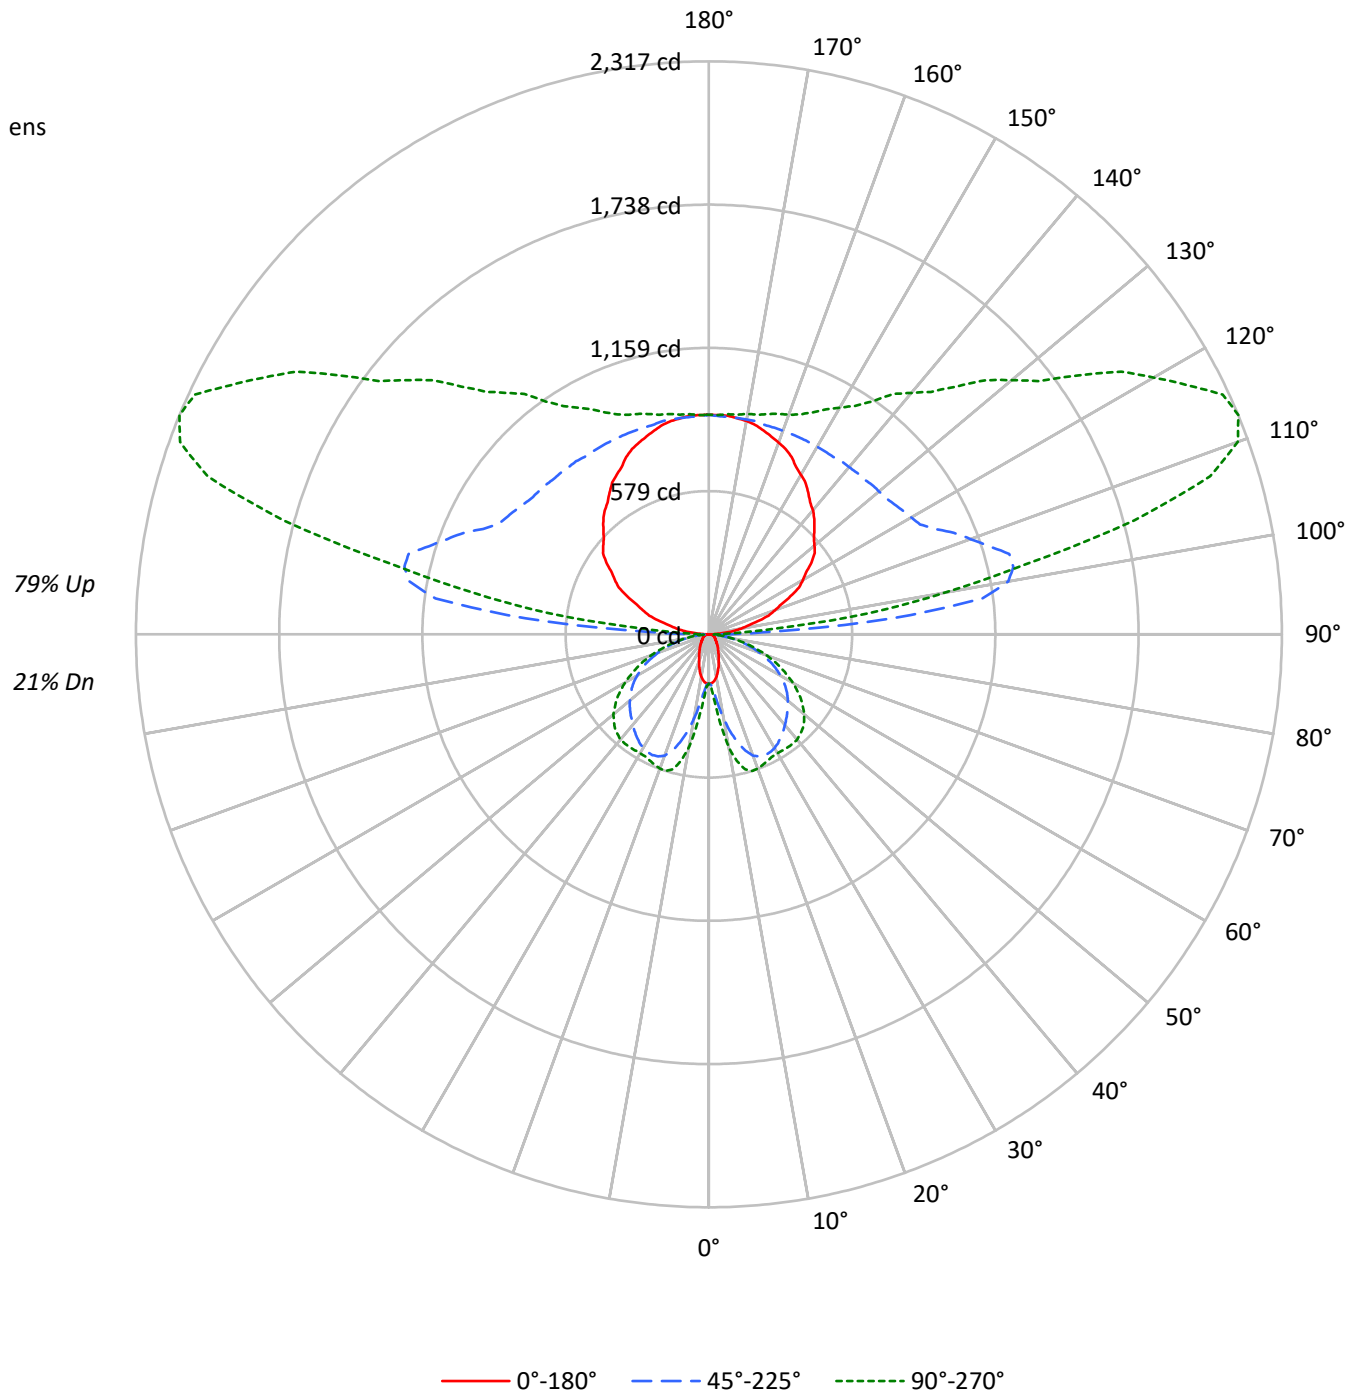



TEST NUMBER: P938302

CATALOG NUMBER: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	100	100	100	100	89	89	89	89	67	67	67	48	48	48	30	30	30	30	30	30	21
1	91	87	83	80	80	77	74	71	58	56	54	41	40	39	26	25	24	24	24	24	17
2	83	75	70	65	73	67	62	58	51	48	45	36	34	32	22	21	20	20	20	20	14
3	75	66	59	53	66	59	53	48	45	40	37	32	29	27	20	18	17	17	17	17	12
4	69	58	50	45	60	52	45	40	39	35	31	28	25	23	17	16	14	14	14	14	10
5	63	51	44	38	55	46	39	34	35	30	27	25	22	19	15	14	12	12	12	12	8
6	57	46	38	32	51	41	34	29	31	26	23	22	19	17	14	12	11	11	11	11	7
7	53	41	33	28	47	37	30	25	28	23	20	20	17	14	12	11	9	9	9	9	6
8	49	37	30	24	43	33	27	22	25	21	17	18	15	13	11	9	8	8	8	8	5
9	45	34	26	21	40	30	24	19	23	18	15	17	13	11	10	9	7	7	7	7	5
10	42	31	24	19	37	27	21	17	21	17	14	15	12	10	10	8	6	6	6	6	4

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1848	1848	1848
5°	1805	2135	2485
10°	1635	3110	4120
15°	1388	4061	4975
20°	1129	4702	5070
25°	940	4917	4968
30°	792	4944	4958
35°	698	4858	5085
40°	609	4748	5218
45°	549	4666	5239
50°	503	4589	5153
55°	481	4483	4923
60°	489	4280	4563
65°	508	3974	4067
70°	536	3459	3437
75°	590	2812	2681
80°	632	1943	1808
85°	530	1028	924

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 5239 cd/sqm



TEST NUMBER: P938302

CATALOG NUMBER: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	25.8	0.4
10°-20°	114.2	1.6
20°-30°	199.8	2.7
30°-40°	257.2	3.5
40°-50°	287.3	3.9
50°-60°	275.2	3.8
60°-70°	218.1	3.0
70°-80°	128.2	1.8
80°-90°	39.0	0.5
90°-100°	432.6	5.9
100°-110°	1137.4	15.6
110°-120°	1179.3	16.2
120°-130°	946.0	13.0
130°-140°	742.2	10.2
140°-150°	569.7	7.8
150°-160°	410.3	5.6
160°-170°	251.0	3.4
170°-180°	84.8	1.2
0°-30°	339.8	4.7
0°-40°	597.0	8.2
0°-60°	1159.5	15.9
0°-90°	1544.8	21.2
90°-120°	2749.3	37.7
90°-150°	5007.2	68.6
90°-180°	5753.0	78.8
0°-180°	7298.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	199	199	199	199	199	
5°	194	208	234	265	275	18
15°	145	268	452	548	566	40
25°	93	304	539	562	563	43
35°	63	291	507	536	557	39
45°	43	232	448	514	537	33
55°	31	147	381	442	454	28
65°	24	78	282	318	322	24
75°	18	48	155	170	171	19
85°	6	15	38	42	43	7
90°	6	17	45	23	23	5
95°	57	224	745	384	262	63
105°	205	310	1257	1909	1781	217
115°	364	442	1007	2009	2293	359
125°	506	568	916	1548	1826	449
135°	603	664	888	1250	1417	467
145°	700	744	876	1066	1150	438
155°	791	813	876	962	990	363
165°	854	865	876	911	922	241
175°	888	888	882	894	894	84
180°	888	888	888	888	888	



TEST NUMBER: P938302  
 CATALOG NUMBER: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	199.2	199.2	199.2	199.2	199.2	199.2	199.2	199.2	199.2	199.2	199.2
2.5°	199.2	199.2	200.5	201.1	202.5	203.1	204.4	205.6	209.5	210.1	211.4
5°	194.2	196.7	205.0	208.2	217.2	229.4	234.5	242.9	260.1	265.2	268.5
7.5°	186.4	192.2	212.7	217.8	240.3	272.3	285.7	303.7	331.2	344.7	355.5
10°	174.3	186.4	223.0	235.1	271.6	320.3	345.3	370.3	412.0	430.5	437.6
12.5°	160.8	180.7	233.9	250.5	303.0	374.2	404.3	431.9	479.2	504.2	508.1
15°	145.4	172.4	244.1	268.5	336.4	419.0	452.3	486.3	530.5	548.4	552.8
17.5°	132.0	166.0	253.7	279.3	361.9	459.4	493.4	521.5	557.3	569.6	572.7
20°	115.4	155.7	260.1	293.5	388.9	488.9	521.5	543.3	567.7	575.3	576.6
22.5°	103.1	144.8	264.0	298.5	406.8	506.7	534.3	551.6	568.2	570.8	571.5
25°	92.9	132.6	263.3	304.4	422.2	517.6	538.8	551.6	561.3	562.5	562.5
27.5°	83.3	119.2	260.7	305.6	433.8	520.2	536.9	545.9	550.4	552.8	552.8
30°	75.0	106.4	254.3	303.0	438.8	517.6	531.1	535.6	540.1	544.0	545.9
32.5°	68.6	94.2	244.8	297.9	439.5	511.2	520.9	523.4	529.8	538.8	542.0
35°	62.7	82.0	233.9	290.9	435.7	501.0	507.4	510.0	522.8	536.2	540.7
37.5°	57.0	73.1	219.7	278.7	429.8	488.9	493.4	497.8	517.6	533.7	538.8
40°	51.3	65.3	203.1	265.2	421.0	474.1	478.0	484.9	511.2	529.8	535.0
42.5°	46.8	58.9	185.2	251.2	409.4	457.4	463.2	473.5	503.6	523.4	529.2
45°	42.9	52.5	166.0	231.9	394.6	440.2	448.5	462.6	494.6	513.8	518.9
47.5°	39.1	48.0	146.1	212.1	378.7	422.9	433.8	449.7	482.5	501.0	505.5
50°	35.9	43.5	126.3	190.9	361.4	404.3	417.0	433.8	467.1	484.4	490.1
52.5°	33.3	39.7	107.6	169.8	341.5	385.1	399.8	417.0	448.5	465.1	469.0
55°	30.8	36.5	91.6	147.4	321.0	364.5	380.6	397.2	427.9	442.1	444.6
57.5°	29.5	34.0	78.1	126.3	299.2	341.5	359.4	374.7	403.6	414.5	417.0
60°	27.5	32.0	67.9	108.3	275.5	319.7	335.1	350.5	374.7	383.7	385.7
62.5°	25.6	30.8	60.3	91.0	251.2	294.0	309.4	323.6	344.0	350.5	353.0
65°	24.4	29.5	54.4	78.1	226.1	267.1	282.5	294.7	311.3	317.7	319.1
67.5°	23.1	28.2	49.9	67.2	201.1	240.3	251.7	263.3	276.1	282.5	283.2
70°	21.1	26.9	46.1	59.6	175.5	209.5	219.1	231.3	241.5	244.8	246.7
72.5°	19.9	25.0	43.5	53.9	149.3	180.0	189.0	196.1	205.0	208.2	208.2
75°	18.0	22.4	41.0	48.0	122.3	147.4	155.0	162.1	169.1	170.4	168.5
77.5°	16.0	19.9	35.2	40.4	95.5	116.6	123.0	126.8	132.6	133.9	134.6
80°	13.5	17.3	27.5	31.4	69.2	85.9	90.3	93.5	98.7	98.7	100.0
82.5°	10.2	13.5	19.9	22.4	46.8	58.9	62.7	64.7	67.9	67.9	67.9
85°	6.4	8.3	12.8	14.7	28.2	35.9	38.5	39.1	41.6	42.3	42.3
87.5°	3.2	4.5	8.3	9.0	14.7	18.6	18.6	19.9	19.9	19.2	18.6
90°	5.9	10.7	15.5	16.7	26.3	39.0	45.3	40.2	30.2	22.6	22.6
92.5°	23.8	64.3	104.9	115.0	161.6	223.8	254.9	223.4	160.4	113.2	108.7
95°	57.2	131.3	205.4	223.9	397.7	629.3	745.2	665.0	504.5	384.2	370.5
97.5°	98.8	164.3	229.7	246.0	535.7	922.0	1115.1	1064.3	962.9	886.9	860.9
100°	131.0	190.3	249.6	264.4	585.9	1014.5	1228.8	1232.5	1240.0	1245.5	1214.6
102.5°	158.4	213.8	269.1	283.0	609.0	1043.6	1261.0	1325.5	1454.8	1551.7	1525.2
105°	204.9	251.8	298.6	310.4	626.0	1046.9	1257.4	1402.1	1691.8	1909.0	1894.8
107.5°	252.6	296.2	340.0	350.9	629.2	1000.4	1185.9	1387.9	1791.9	2094.9	2098.3
110°	284.7	324.1	363.7	373.5	624.5	959.0	1126.3	1352.2	1803.8	2142.5	2157.3



TEST NUMBER: P938302

CATALOG NUMBER: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	316.3	353.9	391.6	400.9	624.7	923.0	1072.2	1303.3	1765.5	2112.2	2134.9
115°	364.0	398.6	433.3	442.0	630.4	881.7	1007.2	1229.8	1675.2	2009.1	2040.7
117.5°	411.0	442.5	474.1	481.9	642.1	855.8	962.5	1163.5	1565.3	1866.7	1901.8
120°	438.3	468.0	497.7	505.1	651.6	847.0	944.7	1128.2	1495.4	1770.9	1804.9
122.5°	465.2	495.1	525.1	532.5	665.3	842.5	931.0	1096.3	1427.0	1675.0	1708.5
125°	506.3	533.6	560.9	567.7	683.8	838.7	916.1	1056.5	1337.4	1548.1	1579.0
127.5°	539.7	567.2	594.7	601.6	702.2	836.5	903.6	1024.2	1265.4	1446.3	1472.3
130°	557.5	587.1	616.7	624.2	715.8	837.8	898.8	1006.2	1220.9	1381.9	1406.0
132.5°	576.0	605.7	635.3	642.7	726.7	838.7	894.6	990.7	1183.0	1327.1	1348.7
135°	603.4	630.4	657.3	664.1	738.6	837.8	887.5	968.0	1128.9	1249.6	1268.2
137.5°	631.4	658.1	684.8	691.5	756.5	843.1	886.3	954.3	1090.4	1192.5	1207.7
140°	654.7	679.3	703.9	710.0	767.4	843.9	882.1	940.9	1058.4	1146.6	1160.8
142.5°	672.5	695.2	718.0	723.7	776.5	846.9	882.1	933.8	1037.0	1114.5	1126.7
145°	699.9	719.8	739.6	744.5	788.4	847.0	876.2	918.4	1002.8	1066.2	1075.4
147.5°	727.2	746.6	765.9	770.8	805.9	852.8	876.2	909.4	975.8	1025.7	1033.3
150°	745.2	762.7	780.0	784.4	815.0	855.8	876.2	904.3	960.3	1002.5	1008.7
152.5°	763.6	776.9	790.1	793.4	821.0	857.8	876.2	900.2	948.1	984.0	988.7
155°	791.0	800.9	810.6	813.1	834.1	862.2	876.2	895.3	933.4	962.0	965.1
157.5°	811.3	820.8	830.3	832.7	847.2	866.6	876.2	891.0	920.6	942.9	945.1
160°	824.9	832.4	839.8	841.6	853.2	868.6	876.2	888.9	914.3	933.3	934.6
162.5°	838.7	844.2	849.8	851.2	859.5	870.7	876.2	886.9	908.4	924.4	925.6
165°	853.6	858.5	863.6	864.8	868.7	873.7	876.2	883.9	899.2	910.7	911.9
167.5°	867.2	869.6	872.0	872.6	875.7	880.0	882.1	887.2	897.2	904.8	905.3
170°	876.2	878.6	881.0	881.6	881.8	882.0	882.1	887.2	897.2	904.8	904.8
172.5°	881.0	881.5	882.0	882.1	882.1	882.1	882.1	886.1	894.1	900.0	899.5
175°	887.5	887.5	887.5	887.5	885.7	883.3	882.1	884.6	889.7	893.5	893.5
177.5°	887.5	887.5	887.5	887.5	886.1	884.3	883.4	885.4	889.3	892.3	891.7
180°	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5



TEST NUMBER: P938302

CATALOG NUMBER: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	199.2	199.2
2.5°	212.7	211.4
5°	273.6	274.8
7.5°	368.3	367.8
10°	458.1	463.8
12.5°	523.4	524.7
15°	563.2	565.7
17.5°	578.5	579.2
20°	579.2	577.9
22.5°	572.1	570.8
25°	563.8	563.2
27.5°	556.1	556.8
30°	552.8	554.9
32.5°	552.8	556.1
35°	554.2	557.3
37.5°	553.5	557.3
40°	550.9	555.4
42.5°	544.0	547.1
45°	533.0	536.9
47.5°	518.9	521.5
50°	501.0	503.6
52.5°	478.6	479.2
55°	451.7	454.2
57.5°	422.9	423.4
60°	390.8	392.7
62.5°	356.9	356.9
65°	321.0	322.2
67.5°	283.8	287.0
70°	246.0	246.7
72.5°	208.9	208.9
75°	170.4	171.0
77.5°	133.9	133.9
80°	99.3	100.0
82.5°	68.6	69.8
85°	42.9	42.9
87.5°	19.9	18.0
90°	22.6	22.6
92.5°	90.6	72.7
95°	316.0	261.5
97.5°	757.2	653.4
100°	1091.0	967.3
102.5°	1419.3	1313.4
105°	1837.9	1781.0
107.5°	2112.1	2125.8
110°	2216.7	2276.0





TEST NUMBER: P938302

CATALOG NUMBER: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	2226.0	2317.0
115°	2167.0	2293.2
117.5°	2041.8	2181.8
120°	1940.9	2077.0
122.5°	1842.8	1976.9
125°	1702.6	1826.2
127.5°	1576.6	1680.9
130°	1502.3	1598.7
132.5°	1434.9	1521.2
135°	1342.6	1417.0
137.5°	1268.6	1329.5
140°	1217.7	1274.6
142.5°	1175.7	1224.6
145°	1112.6	1149.6
147.5°	1064.1	1094.8
150°	1033.6	1058.4
152.5°	1007.5	1026.2
155°	977.5	990.0
157.5°	953.8	962.5
160°	939.6	944.7
162.5°	930.4	935.1
165°	917.0	922.1
167.5°	907.4	909.5
170°	904.8	904.8
172.5°	897.7	895.9
175°	893.5	893.5
177.5°	889.6	887.5
180°	887.5	887.5



TEST NUMBER: P938302  
 CATALOG NUMBER: SQ4-FB-150U-050D-B40-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.21	0.71	1.37	3.00	12.69	13.35	13.86	14.51	16.14
	3H	0.24	0.83	1.41	2.00	3.64	14.50	15.09	15.67	16.26	17.90
	4H	0.53	1.10	1.71	2.26	3.91	15.12	15.69	16.31	16.85	18.50
	6H	0.77	1.29	1.96	2.46	4.11	15.53	16.05	16.72	17.22	18.88
	8H	0.83	1.33	2.02	2.51	4.16	15.64	16.14	16.83	17.32	18.97
	12H	0.84	1.31	2.04	2.49	4.16	15.69	16.17	16.89	17.34	19.01
4H	2H	6.72	7.28	7.91	8.45	10.09	12.94	13.51	14.13	14.67	16.32
	3H	8.27	8.74	9.46	9.93	11.59	14.95	15.43	16.15	16.61	18.27
	4H	8.35	8.79	9.55	9.97	11.64	15.70	16.14	16.90	17.31	18.99
	6H	8.35	8.73	9.55	9.92	11.59	16.22	16.59	17.42	17.79	19.45
	8H	8.33	8.67	9.52	9.86	11.55	16.37	16.71	17.56	17.90	19.59
	12H	8.27	8.59	9.49	9.79	11.48	16.44	16.76	17.66	17.96	19.65
8H	4H	9.77	10.12	10.97	11.31	12.99	15.74	16.09	16.94	17.28	18.97
	6H	10.00	10.29	11.22	11.52	13.20	16.35	16.64	17.57	17.87	19.55
	8H	10.02	10.27	11.24	11.48	13.18	16.56	16.81	17.78	18.02	19.72
	12H	9.98	10.20	11.21	11.40	13.14	16.69	16.91	17.91	18.11	19.84
12H	4H	9.90	10.22	11.12	11.42	13.11	15.69	16.00	16.90	17.20	18.89
	6H	10.26	10.51	11.48	11.72	13.42	16.33	16.58	17.56	17.79	19.49
	8H	10.32	10.54	11.54	11.74	13.47	16.55	16.77	17.77	17.97	19.70