

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938502

Luminaire Tested: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P938502  
REPORT IS A COMBINATION OF REPORTS P933631 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8792.7 lumens  
Efficiency: N/A  
Efficacy: 121.4 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 72.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P938502  
CATALOG NUMBER: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

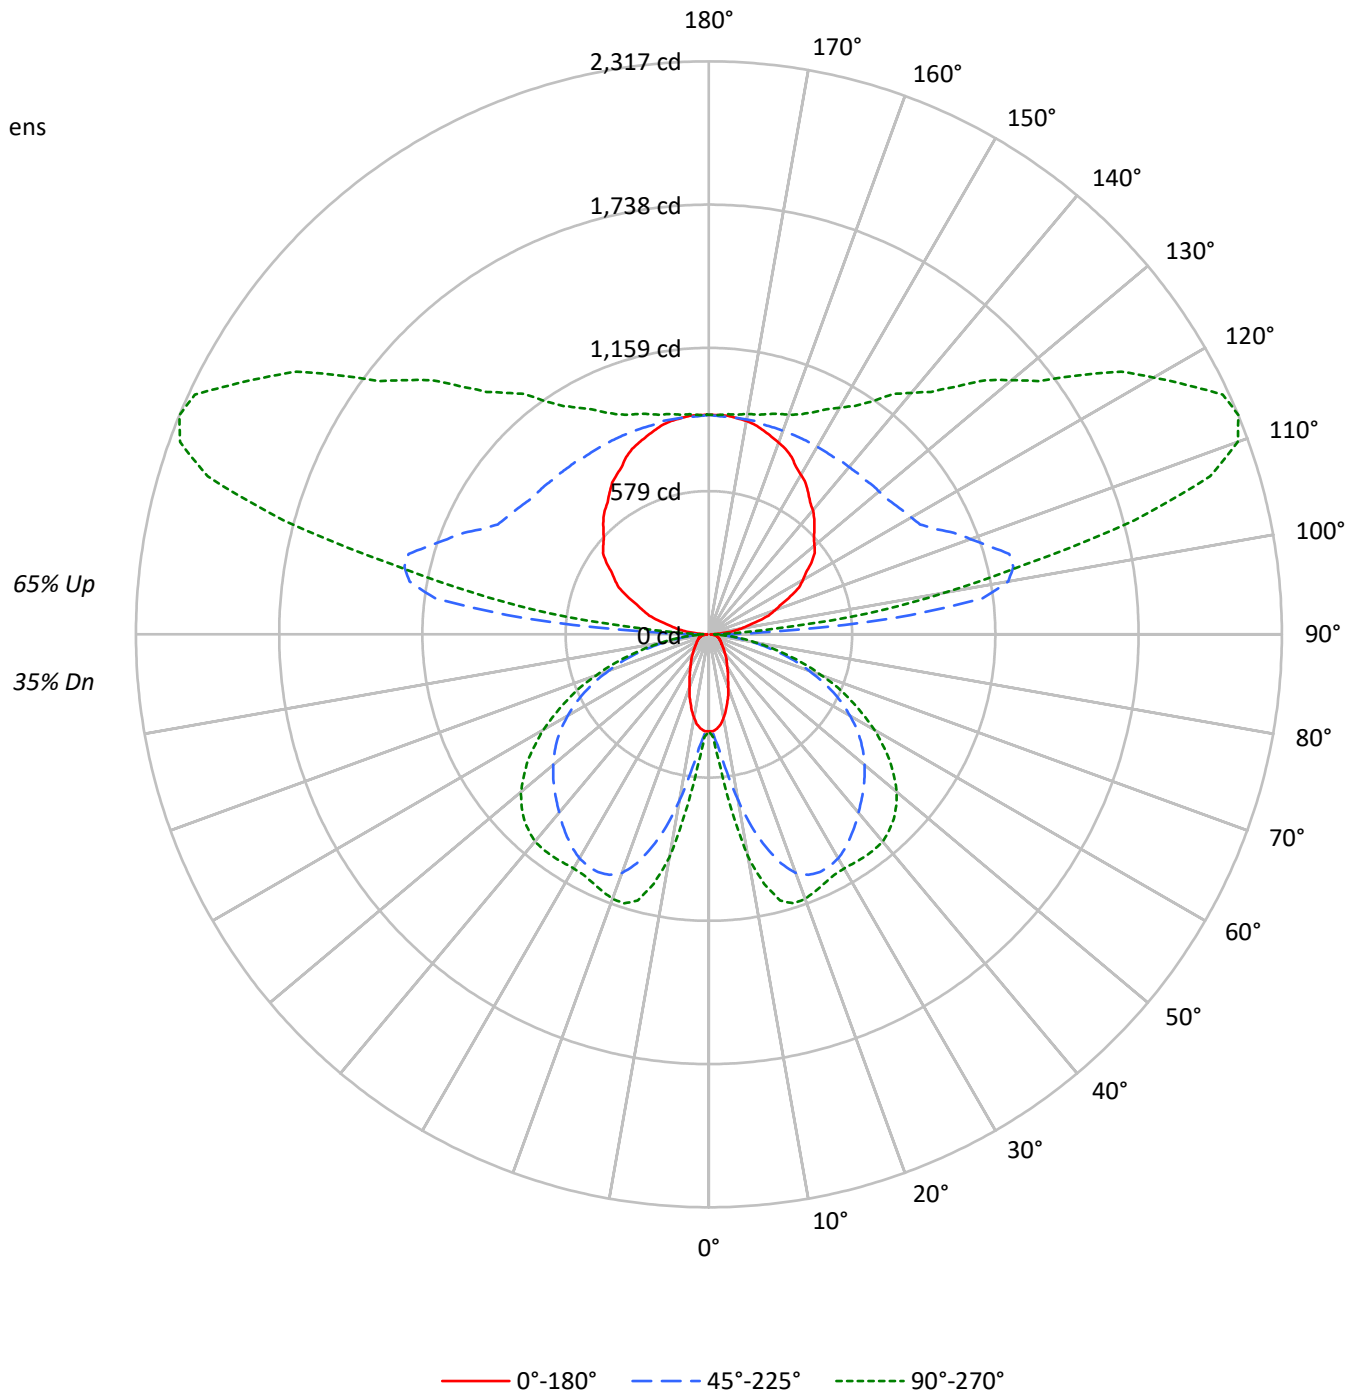



TEST NUMBER: P938502

CATALOG NUMBER: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	75	75	75	58	58	58	42	42	42	35				35
1	94	90	86	82	85	81	78	75	65	63	60	50	49	47	36	35	35	28				28
2	85	78	72	66	77	70	65	61	56	53	49	43	41	39	32	30	29	23				23
3	77	68	61	55	69	61	55	50	49	45	41	38	35	32	28	26	24	19				19
4	71	60	52	46	63	54	47	42	43	38	34	34	30	27	24	22	20	16				16
5	64	53	45	39	58	48	41	36	39	33	29	30	26	23	22	19	17	14				14
6	59	47	39	33	53	43	36	30	34	29	25	27	23	20	19	17	15	12				12
7	54	42	34	29	49	38	31	26	31	26	22	24	20	17	18	15	13	10				10
8	50	38	30	25	45	35	28	23	28	23	19	22	18	15	16	13	11	9				9
9	47	35	27	22	42	31	25	20	26	20	17	20	16	14	15	12	10	8				8
10	43	31	24	20	39	29	22	18	23	18	15	18	15	12	13	11	9	7				7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3641	3641	3641
5°	3554	4205	4895
10°	3220	6127	8115
15°	2733	7998	9798
20°	2222	9262	9986
25°	1852	9684	9783
30°	1559	9738	9765
35°	1377	9569	10018
40°	1197	9350	10278
45°	1082	9189	10319
50°	991	9041	10148
55°	945	8829	9697
60°	964	8430	8988
65°	998	7829	8011
70°	1056	6814	6768
75°	1158	5541	5282
80°	1240	3828	3558
85°	1043	2020	1821

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 10319 cd/sqm



TEST NUMBER: P938502

CATALOG NUMBER: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	50.8	0.6
10°-20°	225.0	2.6
20°-30°	393.5	4.5
30°-40°	506.6	5.8
40°-50°	565.9	6.4
50°-60°	542.0	6.2
60°-70°	429.5	4.9
70°-80°	252.6	2.9
80°-90°	73.6	0.8
90°-100°	432.6	4.9
100°-110°	1137.4	12.9
110°-120°	1179.3	13.4
120°-130°	946.0	10.8
130°-140°	742.2	8.4
140°-150°	569.7	6.5
150°-160°	410.3	4.7
160°-170°	251.0	2.9
170°-180°	84.8	1.0
0°-30°	669.3	7.6
0°-40°	1175.9	13.4
0°-60°	2283.7	26.0
0°-90°	3039.3	34.6
90°-120°	2749.3	31.3
90°-150°	5007.2	56.9
90°-180°	5753.0	65.4
0°-180°	8792.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	392	392	392	392	392	
5°	382	410	462	522	541	35
15°	286	529	891	1080	1114	80
25°	183	599	1061	1108	1109	84
35°	124	573	999	1056	1098	77
45°	84	457	883	1012	1058	65
55°	60	290	750	871	895	55
65°	48	154	556	626	635	48
75°	35	95	305	336	337	37
85°	13	29	76	83	84	13
90°	6	17	45	23	23	6
95°	57	224	745	384	262	63
105°	205	310	1257	1909	1781	217
115°	364	442	1007	2009	2293	359
125°	506	568	916	1548	1826	449
135°	603	664	888	1250	1417	467
145°	700	744	876	1066	1150	438
155°	791	813	876	962	990	363
165°	854	865	876	911	922	241
175°	888	888	882	894	894	84
180°	888	888	888	888	888	



TEST NUMBER: P938502  
 CATALOG NUMBER: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	392.4	392.4	392.4	392.4	392.4	392.4	392.4	392.4	392.4	392.4	392.4
2.5°	392.4	392.4	395.0	396.2	398.7	400.0	402.5	405.0	412.7	413.9	416.4
5°	382.4	387.4	403.8	410.1	427.7	451.7	461.8	478.3	512.4	522.4	528.7
7.5°	367.2	378.6	419.0	429.1	473.2	536.3	562.8	598.1	652.4	678.9	700.3
10°	343.2	367.2	439.1	463.1	535.0	631.0	680.2	729.3	811.4	847.9	861.9
12.5°	316.8	355.8	460.6	493.4	596.9	737.0	796.3	850.5	943.9	993.1	1000.6
15°	286.4	339.4	480.7	528.7	662.5	825.3	890.9	957.8	1044.9	1080.2	1089.0
17.5°	260.0	326.8	499.7	550.2	713.0	904.8	971.6	1027.2	1097.9	1121.8	1128.1
20°	227.1	306.7	512.4	578.0	766.0	962.8	1027.2	1070.1	1118.0	1133.2	1135.7
22.5°	203.1	285.2	519.9	588.0	801.2	998.2	1052.4	1086.5	1119.3	1124.3	1125.6
25°	183.0	261.2	518.7	599.4	831.6	1019.6	1061.2	1086.5	1105.4	1107.9	1107.9
27.5°	164.1	234.7	513.6	601.9	854.2	1024.6	1057.5	1075.1	1083.9	1089.0	1089.0
30°	147.6	209.4	501.0	596.9	864.4	1019.6	1046.1	1054.9	1063.8	1071.3	1075.1
32.5°	135.0	185.5	482.1	586.8	865.6	1007.0	1025.9	1030.9	1043.5	1061.2	1067.6
35°	123.7	161.5	460.6	572.9	858.1	986.8	999.4	1004.5	1029.7	1056.2	1065.0
37.5°	112.3	143.8	432.8	548.9	846.7	962.8	971.6	980.5	1019.6	1051.2	1061.2
40°	100.9	128.7	400.0	522.4	829.0	933.8	941.3	955.3	1007.0	1043.5	1053.7
42.5°	92.2	116.1	364.7	494.7	806.3	900.9	912.3	932.6	991.9	1030.9	1042.3
45°	84.5	103.4	326.8	456.8	777.3	866.9	883.3	911.1	974.2	1012.0	1022.1
47.5°	77.0	94.6	287.7	417.7	745.8	832.9	854.2	885.9	950.2	986.8	995.6
50°	70.7	85.9	248.6	376.1	711.7	796.3	821.5	854.2	920.0	953.9	965.3
52.5°	65.6	78.2	212.0	334.4	672.6	758.4	787.4	821.5	883.3	916.1	923.7
55°	60.5	71.9	180.5	290.2	632.2	718.0	749.6	782.3	843.0	870.7	875.7
57.5°	58.1	66.8	153.9	248.6	589.3	672.6	707.9	738.2	794.9	816.4	821.5
60°	54.2	63.1	133.8	213.3	542.6	629.6	660.0	690.3	738.2	755.9	759.6
62.5°	50.5	60.5	118.6	179.2	494.7	579.2	609.5	637.3	677.7	690.3	695.3
65°	47.9	58.1	107.2	153.9	445.4	526.2	556.5	580.4	613.3	625.9	628.4
67.5°	45.5	55.5	98.5	132.5	396.2	473.2	495.9	518.7	543.9	556.5	557.7
70°	41.6	53.0	90.8	117.4	345.7	412.7	431.6	455.5	475.7	482.1	485.8
72.5°	39.2	49.2	85.9	106.0	294.0	354.6	372.3	386.1	403.8	410.1	410.1
75°	35.3	44.1	80.8	94.6	241.0	290.2	305.4	319.3	333.1	335.7	331.9
77.5°	31.5	39.2	69.4	79.5	188.0	229.7	242.3	249.8	261.2	263.8	265.0
80°	26.5	34.1	54.2	61.8	136.3	169.1	177.9	184.2	194.3	194.3	196.8
82.5°	20.2	26.5	39.2	44.1	92.2	116.1	123.7	127.5	133.8	133.8	133.8
85°	12.6	16.4	25.2	29.0	55.5	70.7	75.7	77.0	82.0	83.3	83.3
87.5°	6.3	8.8	16.4	17.7	29.0	36.6	36.6	39.2	39.2	37.8	36.6
90°	5.9	10.7	15.5	16.7	26.3	39.0	45.3	40.2	30.2	22.6	22.6
92.5°	23.8	64.3	104.9	115.0	161.6	223.8	254.9	223.4	160.4	113.2	108.7
95°	57.2	131.3	205.4	223.9	397.7	629.3	745.2	665.0	504.5	384.2	370.5
97.5°	98.8	164.3	229.7	246.0	535.7	922.0	1115.1	1064.3	962.9	886.9	860.9
100°	131.0	190.3	249.6	264.4	585.9	1014.5	1228.8	1232.5	1240.0	1245.5	1214.6
102.5°	158.4	213.8	269.1	283.0	609.0	1043.6	1261.0	1325.5	1454.8	1551.7	1525.2
105°	204.9	251.8	298.6	310.4	626.0	1046.9	1257.4	1402.1	1691.8	1909.0	1894.8
107.5°	252.6	296.2	340.0	350.9	629.2	1000.4	1185.9	1387.9	1791.9	2094.9	2098.3
110°	284.7	324.1	363.7	373.5	624.5	959.0	1126.3	1352.2	1803.8	2142.5	2157.3



TEST NUMBER: P938502

CATALOG NUMBER: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	316.3	353.9	391.6	400.9	624.7	923.0	1072.2	1303.3	1765.5	2112.2	2134.9
115°	364.0	398.6	433.3	442.0	630.4	881.7	1007.2	1229.8	1675.2	2009.1	2040.7
117.5°	411.0	442.5	474.1	481.9	642.1	855.8	962.5	1163.5	1565.3	1866.7	1901.8
120°	438.3	468.0	497.7	505.1	651.6	847.0	944.7	1128.2	1495.4	1770.9	1804.9
122.5°	465.2	495.1	525.1	532.5	665.3	842.5	931.0	1096.3	1427.0	1675.0	1708.5
125°	506.3	533.6	560.9	567.7	683.8	838.7	916.1	1056.5	1337.4	1548.1	1579.0
127.5°	539.7	567.2	594.7	601.6	702.2	836.5	903.6	1024.2	1265.4	1446.3	1472.3
130°	557.5	587.1	616.7	624.2	715.8	837.8	898.8	1006.2	1220.9	1381.9	1406.0
132.5°	576.0	605.7	635.3	642.7	726.7	838.7	894.6	990.7	1183.0	1327.1	1348.7
135°	603.4	630.4	657.3	664.1	738.6	837.8	887.5	968.0	1128.9	1249.6	1268.2
137.5°	631.4	658.1	684.8	691.5	756.5	843.1	886.3	954.3	1090.4	1192.5	1207.7
140°	654.7	679.3	703.9	710.0	767.4	843.9	882.1	940.9	1058.4	1146.6	1160.8
142.5°	672.5	695.2	718.0	723.7	776.5	846.9	882.1	933.8	1037.0	1114.5	1126.7
145°	699.9	719.8	739.6	744.5	788.4	847.0	876.2	918.4	1002.8	1066.2	1075.4
147.5°	727.2	746.6	765.9	770.8	805.9	852.8	876.2	909.4	975.8	1025.7	1033.3
150°	745.2	762.7	780.0	784.4	815.0	855.8	876.2	904.3	960.3	1002.5	1008.7
152.5°	763.6	776.9	790.1	793.4	821.0	857.8	876.2	900.2	948.1	984.0	988.7
155°	791.0	800.9	810.6	813.1	834.1	862.2	876.2	895.3	933.4	962.0	965.1
157.5°	811.3	820.8	830.3	832.7	847.2	866.6	876.2	891.0	920.6	942.9	945.1
160°	824.9	832.4	839.8	841.6	853.2	868.6	876.2	888.9	914.3	933.3	934.6
162.5°	838.7	844.2	849.8	851.2	859.5	870.7	876.2	886.9	908.4	924.4	925.6
165°	853.6	858.5	863.6	864.8	868.7	873.7	876.2	883.9	899.2	910.7	911.9
167.5°	867.2	869.6	872.0	872.6	875.7	880.0	882.1	887.2	897.2	904.8	905.3
170°	876.2	878.6	881.0	881.6	881.8	882.0	882.1	887.2	897.2	904.8	904.8
172.5°	881.0	881.5	882.0	882.1	882.1	882.1	882.1	886.1	894.1	900.0	899.5
175°	887.5	887.5	887.5	887.5	885.7	883.3	882.1	884.6	889.7	893.5	893.5
177.5°	887.5	887.5	887.5	887.5	886.1	884.3	883.4	885.4	889.3	892.3	891.7
180°	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5



TEST NUMBER: P938502

CATALOG NUMBER: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	392.4	392.4
2.5°	419.0	416.4
5°	538.8	541.4
7.5°	725.6	724.3
10°	902.3	913.6
12.5°	1030.9	1033.5
15°	1109.2	1114.2
17.5°	1139.5	1140.7
20°	1140.7	1138.2
22.5°	1126.9	1124.3
25°	1110.5	1109.2
27.5°	1095.3	1096.5
30°	1089.0	1092.8
32.5°	1089.0	1095.3
35°	1091.6	1097.9
37.5°	1090.2	1097.9
40°	1085.3	1094.0
42.5°	1071.3	1077.6
45°	1049.9	1057.5
47.5°	1022.1	1027.2
50°	986.8	991.9
52.5°	942.6	943.9
55°	889.6	894.6
57.5°	832.9	834.1
60°	769.7	773.6
62.5°	702.9	702.9
65°	632.2	634.7
67.5°	559.1	565.4
70°	484.6	485.8
72.5°	411.4	411.4
75°	335.7	336.9
77.5°	263.8	263.8
80°	195.6	196.8
82.5°	135.0	137.5
85°	84.5	84.5
87.5°	39.2	35.3
90°	22.6	22.6
92.5°	90.6	72.7
95°	316.0	261.5
97.5°	757.2	653.4
100°	1091.0	967.3
102.5°	1419.3	1313.4
105°	1837.9	1781.0
107.5°	2112.1	2125.8
110°	2216.7	2276.0





TEST NUMBER: P938502

CATALOG NUMBER: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	2226.0	2317.0
115°	2167.0	2293.2
117.5°	2041.8	2181.8
120°	1940.9	2077.0
122.5°	1842.8	1976.9
125°	1702.6	1826.2
127.5°	1576.6	1680.9
130°	1502.3	1598.7
132.5°	1434.9	1521.2
135°	1342.6	1417.0
137.5°	1268.6	1329.5
140°	1217.7	1274.6
142.5°	1175.7	1224.6
145°	1112.6	1149.6
147.5°	1064.1	1094.8
150°	1033.6	1058.4
152.5°	1007.5	1026.2
155°	977.5	990.0
157.5°	953.8	962.5
160°	939.6	944.7
162.5°	930.4	935.1
165°	917.0	922.1
167.5°	907.4	909.5
170°	904.8	904.8
172.5°	897.7	895.9
175°	893.5	893.5
177.5°	889.6	887.5
180°	887.5	887.5



TEST NUMBER: P938502  
 CATALOG NUMBER: SQ4-FB-150U-100D-B40-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	3.87	4.63	4.94	5.71	7.18	17.01	17.77	18.09	18.85	20.33
	3H	4.57	5.25	5.65	6.34	7.83	18.83	19.51	19.91	20.60	22.09
	4H	4.86	5.51	5.96	6.60	8.10	19.46	20.11	20.55	21.20	22.69
	6H	5.11	5.71	6.21	6.80	8.31	19.87	20.47	20.97	21.56	23.07
	8H	5.18	5.74	6.28	6.85	8.36	19.98	20.55	21.09	21.66	23.16
	12H	5.19	5.73	6.30	6.83	8.36	20.04	20.58	21.15	21.68	23.21
4H	2H	11.05	11.70	12.15	12.79	14.29	17.28	17.93	18.38	19.01	20.51
	3H	12.61	13.16	13.72	14.27	15.78	19.30	19.84	20.40	20.96	22.47
	4H	12.70	13.20	13.81	14.31	15.84	20.05	20.55	21.16	21.65	23.18
	6H	12.71	13.14	13.83	14.26	15.79	20.57	21.00	21.69	22.13	23.65
	8H	12.68	13.08	13.80	14.20	15.74	20.72	21.12	21.84	22.24	23.78
	12H	12.63	13.00	13.77	14.13	15.67	20.80	21.17	21.94	22.30	23.84
8H	4H	14.13	14.53	15.25	15.65	17.19	20.10	20.50	21.22	21.62	23.16
	6H	14.37	14.70	15.51	15.86	17.40	20.71	21.05	21.86	22.21	23.74
	8H	14.38	14.67	15.53	15.82	17.37	20.92	21.22	22.07	22.36	23.91
	12H	14.35	14.60	15.50	15.74	17.33	21.06	21.31	22.21	22.45	24.04
12H	4H	14.26	14.63	15.40	15.76	17.30	20.05	20.41	21.19	21.55	23.09
	6H	14.62	14.91	15.77	16.05	17.61	20.70	20.99	21.84	22.13	23.68
	8H	14.68	14.94	15.84	16.08	17.67	20.91	21.17	22.07	22.31	23.90