

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937108

Luminaire Tested: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P937108  
REPORT IS A COMBINATION OF REPORTS P933517 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8610.6 lumens  
Efficiency: N/A  
Efficacy: 125.2 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 68.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P937108  
CATALOG NUMBER: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8

### Luminous Intensity Polar Plot

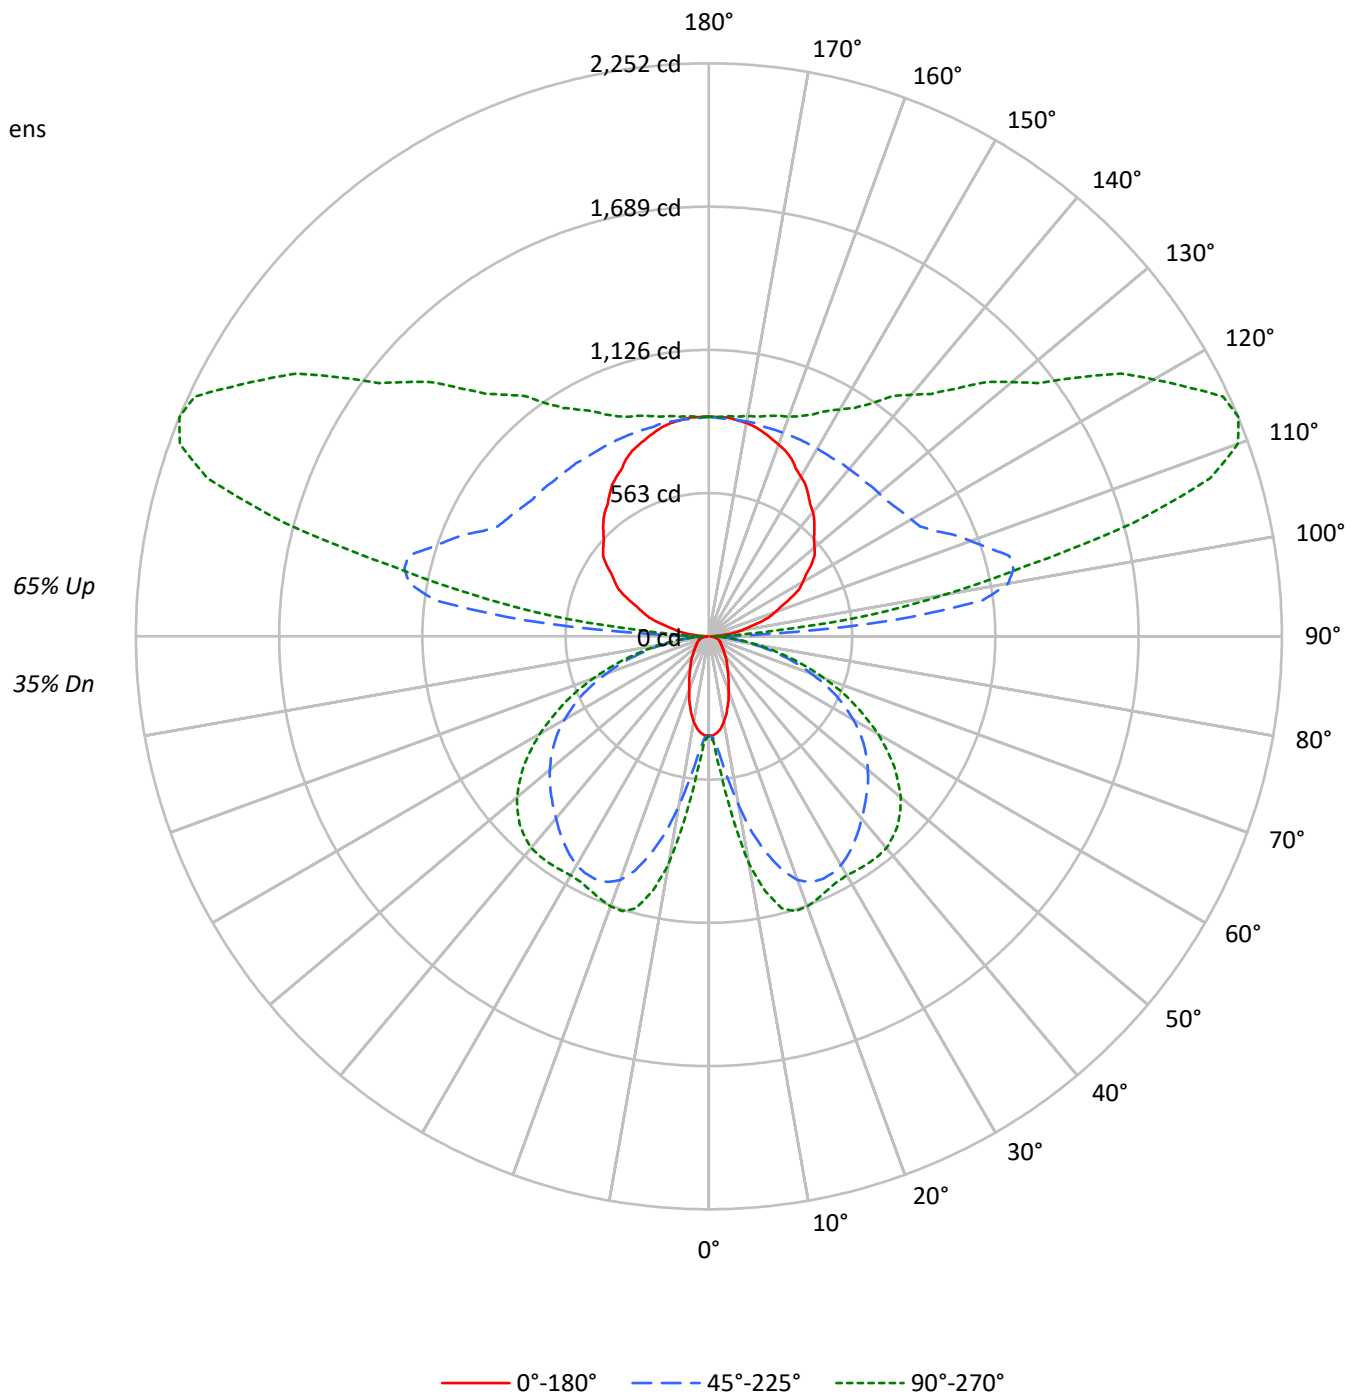



TEST NUMBER: P937108

CATALOG NUMBER: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	42	42	42	35				35
1	94	90	86	82	85	81	78	75	65	63	61	50	49	47	37	36	35	29				29
2	85	78	72	66	77	70	65	61	57	53	50	44	41	39	32	30	29	23				23
3	77	68	61	55	70	62	55	50	49	45	41	38	35	32	28	26	24	19				19
4	71	60	52	46	63	54	47	42	44	39	35	34	30	27	25	22	20	16				16
5	65	53	45	39	58	48	41	36	39	33	29	30	26	23	22	19	17	14				14
6	59	47	39	33	53	43	36	31	35	29	25	27	23	20	20	17	15	12				12
7	55	42	34	29	49	38	31	26	31	26	22	24	20	17	18	15	13	10				10
8	50	38	30	25	45	35	28	23	28	23	19	22	18	15	16	14	12	9				9
9	47	35	27	22	42	32	25	20	26	21	17	20	16	14	15	12	10	8				8
10	44	32	24	20	39	29	22	18	23	18	15	18	15	12	14	11	9	7				7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1808	1808	1808
5°	1766	2089	2430
10°	1602	3046	4028
15°	1361	3979	4864
20°	1108	4611	4957
25°	925	4825	4856
30°	779	4855	4847
35°	689	4775	4973
40°	601	4670	5102
45°	544	4593	5122
50°	499	4525	5037
55°	478	4423	4814
60°	490	4229	4461
65°	509	3934	3977
70°	543	3430	3360
75°	601	2797	2622
80°	656	1939	1766
85°	582	1030	905

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 5122 cd/sqm



TEST NUMBER: P937108

CATALOG NUMBER: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	50.4	0.6
10°-20°	223.4	2.6
20°-30°	390.7	4.5
30°-40°	502.9	5.8
40°-50°	561.8	6.5
50°-60°	538.1	6.2
60°-70°	426.4	5.0
70°-80°	250.7	2.9
80°-90°	73.0	0.8
90°-100°	420.6	4.9
100°-110°	1105.7	12.8
110°-120°	1146.5	13.3
120°-130°	919.6	10.7
130°-140°	721.6	8.4
140°-150°	553.9	6.4
150°-160°	398.9	4.6
160°-170°	244.0	2.8
170°-180°	82.5	1.0
0°-30°	664.5	7.7
0°-40°	1167.4	13.6
0°-60°	2267.2	26.3
0°-90°	3017.3	35.0
90°-120°	2672.8	31.0
90°-150°	4867.9	56.5
90°-180°	5593.0	65.0
0°-180°	8610.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	390	390	390	390	390	
5°	380	407	458	519	537	35
15°	284	525	884	1072	1106	79
25°	182	595	1054	1100	1101	84
35°	123	569	992	1049	1090	77
45°	84	454	877	1005	1050	65
55°	60	288	744	864	888	55
65°	48	153	552	621	630	47
75°	35	94	303	333	334	37
85°	12	29	75	83	84	13
90°	6	16	44	22	22	6
95°	56	218	724	374	254	62
105°	199	302	1222	1856	1731	211
115°	354	430	979	1953	2229	349
125°	492	552	891	1505	1775	437
135°	587	646	863	1215	1378	454
145°	680	724	852	1037	1118	426
155°	769	790	852	935	962	353
165°	830	841	852	885	896	234
175°	863	863	858	869	869	82
180°	863	863	863	863	863	



TEST NUMBER: P937108

CATALOG NUMBER: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	389.6	389.6	389.6	389.6	389.6	389.6	389.6	389.6	389.6	389.6	389.6
2.5°	389.6	389.6	392.1	393.4	395.8	397.1	399.7	402.2	409.7	410.9	413.4
5°	379.6	384.6	400.9	407.1	424.7	448.5	458.5	474.8	508.7	518.7	524.9
7.5°	364.5	375.8	415.9	425.9	469.8	532.4	558.7	593.8	647.6	674.0	695.3
10°	340.7	364.5	436.0	459.8	531.2	626.3	675.3	724.1	805.5	841.8	855.6
12.5°	314.5	353.2	457.3	489.8	592.5	731.6	790.5	844.3	937.1	985.9	993.4
15°	284.4	337.0	477.3	524.9	657.7	819.3	884.5	950.8	1037.3	1072.3	1081.1
17.5°	258.1	324.5	496.1	546.2	707.8	898.2	964.6	1019.7	1089.9	1113.7	1120.0
20°	225.5	304.4	508.7	573.8	760.5	955.9	1019.7	1062.3	1110.0	1125.0	1127.5
22.5°	201.7	283.1	516.1	583.8	795.5	991.0	1044.8	1078.7	1111.2	1116.2	1117.4
25°	181.7	259.3	514.9	595.1	825.6	1012.3	1053.6	1078.7	1097.4	1100.0	1100.0
27.5°	162.9	233.0	509.9	597.6	848.2	1017.2	1049.8	1067.4	1076.2	1081.1	1081.1
30°	146.5	208.0	497.4	592.5	858.2	1012.3	1038.5	1047.3	1056.1	1063.6	1067.4
32.5°	134.0	184.2	478.6	582.5	859.4	999.7	1018.5	1023.5	1036.0	1053.6	1059.8
35°	122.7	160.4	457.3	568.7	851.9	979.7	992.2	997.2	1022.3	1048.6	1057.3
37.5°	111.5	142.8	429.7	545.0	840.6	955.9	964.6	973.4	1012.3	1043.6	1053.6
40°	100.2	127.8	397.1	518.7	823.0	927.1	934.6	948.4	999.7	1036.0	1046.1
42.5°	91.4	115.3	362.0	491.1	800.5	894.5	905.8	925.8	984.7	1023.5	1034.8
45°	84.0	102.7	324.5	453.5	771.7	860.7	876.9	904.5	967.2	1004.7	1014.7
47.5°	76.4	94.0	285.6	414.7	740.4	826.9	848.2	879.5	943.3	979.7	988.5
50°	70.1	85.2	246.8	373.3	706.6	790.5	815.6	848.2	913.3	947.1	958.4
52.5°	65.1	77.7	210.4	331.9	667.7	752.9	781.8	815.6	876.9	909.5	917.0
55°	60.1	71.5	179.1	288.1	627.6	712.8	744.1	776.7	836.9	864.4	869.5
57.5°	57.6	66.4	152.8	246.8	585.1	667.7	702.8	732.9	789.2	810.5	815.6
60°	53.9	62.7	132.8	211.7	538.7	625.1	655.2	685.3	732.9	750.4	754.2
62.5°	50.2	60.1	117.8	177.9	491.1	575.1	605.0	632.7	672.8	685.3	690.3
65°	47.6	57.6	106.5	152.8	442.2	522.4	552.5	576.3	608.9	621.4	623.9
67.5°	45.1	55.1	97.7	131.5	393.4	469.8	492.3	514.9	539.9	552.5	553.7
70°	41.4	52.6	90.2	116.5	343.2	409.7	428.4	452.2	472.3	478.6	482.3
72.5°	38.9	48.8	85.2	105.3	291.9	352.0	369.6	383.3	400.9	407.1	407.1
75°	35.1	43.8	80.1	94.0	239.3	288.1	303.2	316.9	330.7	333.3	329.5
77.5°	31.3	38.9	68.9	78.9	186.7	228.0	240.5	248.1	259.3	261.8	263.1
80°	26.3	33.8	53.9	61.4	135.3	167.8	176.6	182.9	193.0	193.0	195.4
82.5°	20.1	26.3	38.9	43.8	91.4	115.3	122.7	126.6	132.8	132.8	132.8
85°	12.5	16.3	25.0	28.8	55.1	70.1	75.2	76.4	81.4	82.7	82.7
87.5°	6.3	8.8	16.3	17.6	28.8	36.3	36.3	38.9	38.9	37.5	36.3
90°	5.8	10.5	15.1	16.3	25.5	37.8	44.0	39.1	29.3	22.0	22.0
92.5°	23.2	62.6	102.0	111.8	157.2	217.6	247.9	217.2	156.0	110.0	105.6
95°	55.6	127.7	199.7	217.7	386.6	611.8	724.4	646.4	490.4	373.5	360.2
97.5°	96.1	159.7	223.3	239.2	520.8	896.3	1084.0	1034.7	936.1	862.3	837.1
100°	127.4	185.0	242.7	257.1	569.6	986.3	1194.6	1198.2	1205.4	1210.8	1180.8
102.5°	154.0	207.8	261.6	275.1	592.0	1014.6	1225.9	1288.6	1414.3	1508.5	1482.7
105°	199.2	244.8	290.3	301.7	608.6	1017.8	1222.4	1363.2	1644.7	1855.9	1842.0
107.5°	245.5	288.0	330.4	341.1	611.7	972.5	1152.9	1349.3	1742.0	2036.6	2039.9
110°	276.8	315.1	353.4	363.0	607.0	932.3	1095.0	1314.5	1753.6	2082.9	2097.3



TEST NUMBER: P937108

CATALOG NUMBER: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	307.5	344.0	380.5	389.7	607.2	897.3	1042.3	1267.1	1716.4	2053.4	2075.5
115°	353.8	387.5	421.2	429.6	612.8	857.0	979.2	1195.6	1628.5	1953.2	1983.9
117.5°	399.6	430.2	460.8	468.5	624.3	831.9	935.8	1131.1	1521.8	1814.8	1848.8
120°	426.2	455.0	483.8	491.0	633.4	823.4	918.4	1096.9	1453.9	1721.5	1754.6
122.5°	452.2	481.4	510.4	517.7	646.8	818.9	905.0	1065.8	1387.3	1628.3	1660.9
125°	492.2	518.7	545.2	551.8	664.7	815.3	890.6	1027.1	1300.1	1505.0	1535.0
127.5°	524.6	551.4	578.1	584.9	682.8	813.2	878.4	995.6	1230.1	1406.0	1431.3
130°	542.0	570.8	599.6	606.8	695.8	814.5	873.9	978.2	1186.9	1343.5	1366.9
132.5°	559.9	588.8	617.7	624.8	706.5	815.3	869.7	963.1	1150.0	1290.1	1311.1
135°	586.6	612.8	639.1	645.7	718.1	814.5	862.8	941.1	1097.5	1214.9	1233.0
137.5°	613.8	639.8	665.8	672.3	735.4	819.6	861.6	927.7	1060.1	1159.3	1174.0
140°	636.4	660.3	684.2	690.2	746.0	820.4	857.6	914.8	1029.0	1114.7	1128.6
142.5°	653.8	675.9	698.1	703.6	755.0	823.4	857.6	907.8	1008.2	1083.4	1095.3
145°	680.4	699.8	719.0	723.8	766.5	823.4	851.8	892.9	975.0	1036.6	1045.5
147.5°	707.0	725.8	744.7	749.3	783.5	829.0	851.8	884.1	948.7	997.1	1004.6
150°	724.4	741.4	758.4	762.6	792.3	832.0	851.8	879.1	933.6	974.5	980.6
152.5°	742.3	755.2	768.1	771.3	798.1	833.9	851.8	875.1	921.7	956.6	961.2
155°	769.0	778.5	788.0	790.4	810.9	838.2	851.8	870.3	907.4	935.2	938.2
157.5°	788.7	797.9	807.2	809.5	823.6	842.4	851.8	866.2	895.1	916.6	918.8
160°	802.0	809.2	816.4	818.2	829.4	844.3	851.8	864.1	888.9	907.4	908.6
162.5°	815.3	820.7	826.1	827.5	835.6	846.4	851.8	862.3	883.1	898.7	899.8
165°	829.8	834.6	839.6	840.8	844.4	849.4	851.8	859.3	874.2	885.4	886.6
167.5°	843.1	845.5	847.8	848.4	851.4	855.5	857.6	862.5	872.3	879.6	880.1
170°	851.8	854.1	856.5	857.0	857.2	857.5	857.6	862.5	872.3	879.6	879.6
172.5°	856.5	856.9	857.5	857.6	857.6	857.6	857.6	861.4	869.2	875.0	874.5
175°	862.8	862.8	862.8	862.8	861.1	858.7	857.6	860.0	865.0	868.6	868.6
177.5°	862.8	862.8	862.8	862.8	861.4	859.7	858.7	860.7	864.5	867.4	866.9
180°	862.8	862.8	862.8	862.8	862.8	862.8	862.8	862.8	862.8	862.8	862.8



TEST NUMBER: P937108

CATALOG NUMBER: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	389.6	389.6
2.5°	415.9	413.4
5°	534.9	537.4
7.5°	720.3	719.1
10°	895.7	907.0
12.5°	1023.5	1026.0
15°	1101.2	1106.2
17.5°	1131.3	1132.5
20°	1132.5	1130.0
22.5°	1118.7	1116.2
25°	1102.4	1101.2
27.5°	1087.4	1088.7
30°	1081.1	1084.9
32.5°	1081.1	1087.4
35°	1083.6	1089.9
37.5°	1082.4	1089.9
40°	1077.4	1086.1
42.5°	1063.6	1069.9
45°	1042.3	1049.8
47.5°	1014.7	1019.7
50°	979.7	984.7
52.5°	935.8	937.1
55°	883.2	888.2
57.5°	826.9	828.1
60°	764.2	767.9
62.5°	697.8	697.8
65°	627.6	630.2
67.5°	555.0	561.2
70°	481.1	482.3
72.5°	408.4	408.4
75°	333.3	334.5
77.5°	261.8	261.8
80°	194.2	195.4
82.5°	134.0	136.6
85°	84.0	84.0
87.5°	38.9	35.1
90°	22.0	22.0
92.5°	88.2	70.6
95°	307.3	254.2
97.5°	736.1	635.2
100°	1060.7	940.4
102.5°	1379.8	1276.9
105°	1786.6	1731.4
107.5°	2053.3	2066.7
110°	2155.0	2212.6





TEST NUMBER: P937108

CATALOG NUMBER: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	2164.0	2252.5
115°	2106.6	2229.4
117.5°	1984.9	2121.1
120°	1887.0	2019.2
122.5°	1791.4	1921.9
125°	1655.2	1775.4
127.5°	1532.7	1634.1
130°	1460.5	1554.2
132.5°	1395.0	1478.9
135°	1305.3	1377.6
137.5°	1233.3	1292.5
140°	1183.9	1239.2
142.5°	1142.9	1190.6
145°	1081.6	1117.6
147.5°	1034.4	1064.3
150°	1004.8	1029.0
152.5°	979.4	997.7
155°	950.3	962.4
157.5°	927.3	935.8
160°	913.5	918.4
162.5°	904.5	909.2
165°	891.5	896.4
167.5°	882.2	884.2
170°	879.6	879.6
172.5°	872.7	871.0
175°	868.6	868.6
177.5°	864.9	862.8
180°	862.8	862.8



TEST NUMBER: P937108  
 CATALOG NUMBER: SQ4-FB-075U-050D-B50-1D-UNV-STD-W-8

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	1.51	2.28	2.58	3.35	4.82	14.69	15.46	15.76	16.53	18.00
	3H	2.21	2.90	3.29	3.98	5.46	16.52	17.21	17.60	18.29	19.78
	4H	2.50	3.15	3.59	4.24	5.73	17.16	17.82	18.25	18.90	20.39
	6H	2.75	3.35	3.85	4.44	5.94	17.59	18.19	18.69	19.28	20.78
	8H	2.81	3.39	3.92	4.49	5.99	17.71	18.28	18.81	19.38	20.88
	12H	2.83	3.37	3.93	4.47	5.99	17.77	18.32	18.88	19.41	20.94
4H	2H	8.71	9.37	9.81	10.45	11.94	14.95	15.61	16.05	16.69	18.18
	3H	10.27	10.82	11.38	11.93	13.44	16.99	17.54	18.09	18.65	20.15
	4H	10.36	10.87	11.47	11.97	13.49	17.75	18.25	18.86	19.36	20.88
	6H	10.37	10.80	11.49	11.93	13.44	18.29	18.72	19.40	19.84	21.36
	8H	10.34	10.75	11.46	11.86	13.40	18.45	18.85	19.56	19.97	21.50
	12H	10.29	10.66	11.43	11.79	13.33	18.53	18.90	19.67	20.03	21.57
8H	4H	11.80	12.20	12.92	13.32	14.85	17.80	18.21	18.92	19.32	20.86
	6H	12.04	12.37	13.18	13.53	15.06	18.43	18.76	19.57	19.92	21.45
	8H	12.05	12.35	13.20	13.49	15.04	18.65	18.94	19.79	20.08	21.63
	12H	12.02	12.27	13.17	13.41	15.00	18.79	19.04	19.94	20.18	21.77
12H	4H	11.94	12.30	13.07	13.43	14.97	17.75	18.12	18.89	19.25	20.79
	6H	12.30	12.59	13.44	13.73	15.28	18.41	18.70	19.55	19.84	21.39
	8H	12.36	12.62	13.51	13.75	15.34	18.64	18.89	19.78	20.03	21.61