

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938306

Luminaire Tested: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P938306
REPORT IS A COMBINATION OF REPORTS P933629 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7137.7 lumens
Efficiency: N/A
Efficacy: 128.4 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 55.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P938306
CATALOG NUMBER: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

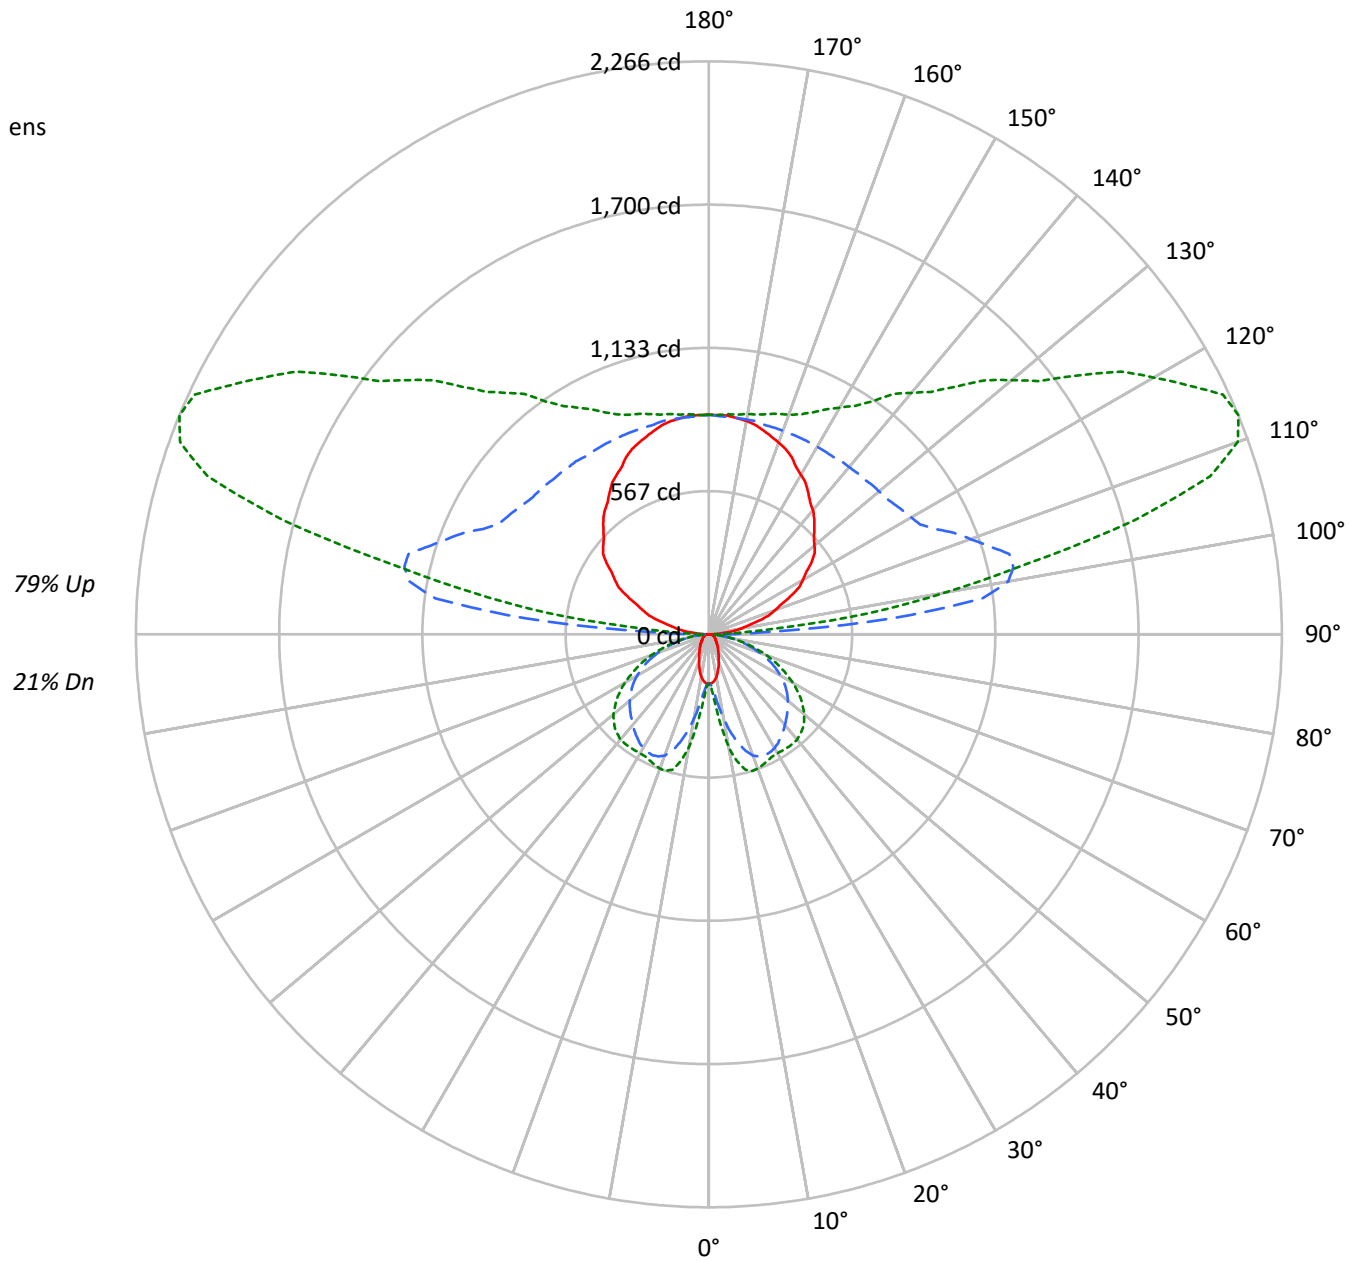

— 0°-180° - - 45°-225° - - - 90°-270°



TEST NUMBER: P938306

CATALOG NUMBER: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	100	100	100	100	89	89	89	89	67	67	67	48	48	48	30	30	30	30	30	30	21
1	91	87	83	80	80	77	74	71	58	56	54	41	40	39	26	25	24	24	24	24	17
2	83	75	70	65	73	67	62	58	51	48	45	36	34	32	22	21	20	20	20	20	14
3	75	66	59	53	66	59	53	48	45	40	37	32	29	27	20	18	17	17	17	17	12
4	69	58	50	45	60	52	45	40	39	35	31	28	25	23	17	16	14	14	14	14	10
5	63	51	44	38	55	46	39	34	35	30	27	25	22	19	15	14	12	12	12	12	8
6	57	46	38	32	51	41	34	29	31	26	23	22	19	17	14	12	11	11	11	11	7
7	53	41	33	28	47	37	30	25	28	23	20	20	17	14	12	11	9	9	9	9	6
8	49	37	30	24	43	33	27	22	25	21	17	18	15	13	11	9	8	8	8	8	5
9	45	34	26	21	40	30	24	19	23	18	15	17	13	11	10	9	7	7	7	7	5
10	42	31	24	19	37	27	21	17	21	17	14	15	12	10	10	8	6	6	6	6	4

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1808	1808	1808
5°	1765	2088	2430
10°	1599	3042	4029
15°	1357	3971	4866
20°	1104	4599	4959
25°	920	4809	4858
30°	774	4835	4849
35°	684	4751	4974
40°	596	4644	5103
45°	536	4563	5124
50°	492	4489	5039
55°	470	4384	4815
60°	479	4186	4463
65°	496	3887	3977
70°	523	3383	3362
75°	577	2751	2623
80°	618	1902	1768
85°	522	1004	903

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 5124 cd/sqm



TEST NUMBER: P938306

CATALOG NUMBER: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	25.2	0.4
10°-20°	111.7	1.6
20°-30°	195.4	2.7
30°-40°	251.5	3.5
40°-50°	281.0	3.9
50°-60°	269.1	3.8
60°-70°	213.3	3.0
70°-80°	125.4	1.8
80°-90°	38.2	0.5
90°-100°	423.1	5.9
100°-110°	1112.4	15.6
110°-120°	1153.4	16.2
120°-130°	925.2	13.0
130°-140°	725.9	10.2
140°-150°	557.2	7.8
150°-160°	401.3	5.6
160°-170°	245.5	3.4
170°-180°	82.9	1.2
0°-30°	332.3	4.7
0°-40°	583.9	8.2
0°-60°	1134.0	15.9
0°-90°	1510.8	21.2
90°-120°	2688.9	37.7
90°-150°	4897.1	68.6
90°-180°	5627.0	78.8
0°-180°	7137.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	195	195	195	195	195	
5°	190	204	229	259	269	18
15°	142	262	442	536	553	40
25°	91	298	527	550	551	42
35°	61	284	496	524	545	38
45°	42	227	439	502	525	32
55°	30	144	372	432	444	27
65°	24	76	276	311	315	24
75°	18	47	152	167	167	18
85°	6	14	38	41	42	7
90°	6	16	44	22	22	5
95°	56	219	729	376	256	62
105°	200	304	1230	1867	1742	212
115°	356	432	985	1965	2243	352
125°	495	555	896	1514	1786	440
135°	590	650	868	1222	1386	457
145°	684	728	857	1043	1124	429
155°	774	795	857	941	968	355
165°	835	846	857	891	902	236
175°	868	868	863	874	874	82
180°	868	868	868	868	868	



TEST NUMBER: P938306

CATALOG NUMBER: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	194.8	194.8	194.8	194.8	194.8	194.8	194.8	194.8	194.8	194.8	194.8
2.5°	194.8	194.8	196.1	196.7	198.0	198.7	199.9	201.1	204.9	205.5	206.8
5°	189.9	192.4	200.5	203.6	212.4	224.3	229.3	237.5	254.4	259.4	262.5
7.5°	182.3	188.0	208.0	213.0	235.0	266.3	279.5	297.0	323.9	337.1	347.7
10°	170.5	182.3	218.1	230.0	265.6	313.3	337.7	362.2	402.9	421.0	428.0
12.5°	157.3	176.7	228.7	245.0	296.4	365.9	395.4	422.4	468.7	493.2	496.9
15°	142.2	168.6	238.7	262.5	329.0	409.7	442.3	475.6	518.8	536.3	540.7
17.5°	129.1	162.3	248.2	273.2	354.0	449.3	482.5	510.1	545.1	557.0	560.1
20°	112.8	152.2	254.4	287.0	380.3	478.1	510.1	531.4	555.2	562.6	563.9
22.5°	100.9	141.6	258.2	292.0	397.9	495.6	522.6	539.5	555.7	558.3	558.9
25°	90.9	129.7	257.5	297.7	412.9	506.2	527.0	539.5	548.9	550.1	550.1
27.5°	81.4	116.6	255.0	298.9	424.2	508.7	525.1	533.9	538.3	540.7	540.7
30°	73.3	104.0	248.7	296.4	429.2	506.2	519.4	523.8	528.2	532.0	533.9
32.5°	67.1	92.1	239.4	291.3	429.8	500.0	509.4	511.9	518.2	527.0	530.0
35°	61.4	80.2	228.7	284.5	426.1	490.0	496.2	498.8	511.3	524.4	528.8
37.5°	55.8	71.5	214.9	272.5	420.4	478.1	482.5	486.9	506.2	521.9	527.0
40°	50.2	63.9	198.7	259.4	411.7	463.6	467.5	474.3	500.0	518.2	523.2
42.5°	45.8	57.6	181.1	245.6	400.4	447.4	453.0	463.1	492.5	511.9	517.5
45°	41.9	51.4	162.3	226.8	385.9	430.5	438.6	452.4	483.7	502.5	507.5
47.5°	38.2	47.0	142.9	207.4	370.3	413.6	424.2	439.8	471.9	490.0	494.4
50°	35.1	42.6	123.5	186.7	353.4	395.4	407.9	424.2	456.8	473.7	479.3
52.5°	32.6	38.9	105.3	166.1	334.0	376.6	391.0	407.9	438.6	454.9	458.7
55°	30.1	35.7	89.6	144.1	313.9	356.5	372.2	388.5	418.5	432.3	434.9
57.5°	28.9	33.3	76.4	123.5	292.6	334.0	351.5	366.5	394.7	405.4	407.9
60°	26.9	31.3	66.4	105.9	269.5	312.7	327.7	342.8	366.5	375.3	377.2
62.5°	25.0	30.1	58.9	89.0	245.6	287.6	302.6	316.4	336.4	342.8	345.2
65°	23.8	28.9	53.2	76.4	221.2	261.2	276.3	288.2	304.5	310.7	312.0
67.5°	22.6	27.6	48.8	65.8	196.7	235.0	246.2	257.5	270.0	276.3	276.9
70°	20.6	26.3	45.1	58.3	171.7	204.9	214.3	226.2	236.2	239.4	241.3
72.5°	19.4	24.5	42.6	52.7	146.0	176.1	184.8	191.8	200.5	203.6	203.6
75°	17.6	21.9	40.1	47.0	119.6	144.1	151.6	158.5	165.4	166.6	164.8
77.5°	15.7	19.4	34.5	39.5	93.4	114.0	120.3	124.0	129.7	130.9	131.6
80°	13.2	16.9	26.9	30.7	67.7	84.0	88.4	91.4	96.5	96.5	97.8
82.5°	10.0	13.2	19.4	21.9	45.8	57.6	61.4	63.3	66.4	66.4	66.4
85°	6.3	8.1	12.5	14.4	27.6	35.1	37.6	38.2	40.7	41.4	41.4
87.5°	3.2	4.4	8.1	8.8	14.4	18.2	18.2	19.4	19.4	18.8	18.2
90°	5.8	10.5	15.1	16.3	25.7	38.1	44.3	39.3	29.5	22.1	22.1
92.5°	23.3	62.9	102.6	112.5	158.0	218.8	249.3	218.5	156.9	110.7	106.3
95°	55.9	128.4	200.9	219.0	388.9	615.5	728.8	650.3	493.4	375.7	362.4
97.5°	96.7	160.6	224.6	240.6	523.9	901.7	1090.5	1040.9	941.8	867.4	842.0
100°	128.1	186.1	244.1	258.6	573.0	992.2	1201.8	1205.4	1212.7	1218.1	1187.9
102.5°	155.0	209.1	263.2	276.7	595.6	1020.7	1233.3	1296.4	1422.8	1517.6	1491.7
105°	200.4	246.3	292.1	303.6	612.2	1023.9	1229.7	1371.3	1654.6	1867.1	1853.1
107.5°	247.0	289.7	332.5	343.2	615.4	978.4	1159.8	1357.4	1752.5	2048.8	2052.2
110°	278.4	317.0	355.7	365.3	610.7	937.9	1101.6	1322.5	1764.1	2095.4	2109.9



TEST NUMBER: P938306

CATALOG NUMBER: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	309.3	346.1	382.9	392.1	610.9	902.7	1048.6	1274.6	1726.7	2065.7	2088.0
115°	355.9	389.9	423.8	432.3	616.5	862.3	985.1	1202.8	1638.3	1964.9	1995.9
117.5°	402.0	432.8	463.6	471.3	628.0	837.0	941.4	1137.9	1530.9	1825.7	1860.0
120°	428.7	457.8	486.7	494.0	637.3	828.4	923.9	1103.4	1462.6	1731.9	1765.2
122.5°	455.0	484.2	513.5	520.8	650.7	824.0	910.6	1072.2	1395.6	1638.1	1670.9
125°	495.2	521.8	548.5	555.2	668.7	820.2	896.0	1033.3	1308.0	1514.0	1544.3
127.5°	527.8	554.7	581.6	588.3	686.8	818.1	883.8	1001.7	1237.6	1414.4	1439.9
130°	545.3	574.2	603.2	610.5	700.0	819.4	879.1	984.1	1194.0	1351.5	1375.0
132.5°	563.3	592.3	621.3	628.6	710.7	820.2	875.0	968.9	1156.9	1297.9	1319.0
135°	590.1	616.5	642.9	649.5	722.4	819.4	868.0	946.7	1104.1	1222.1	1240.4
137.5°	617.5	643.6	669.8	676.3	739.8	824.5	866.8	933.3	1066.4	1166.3	1181.1
140°	640.3	664.4	688.5	694.4	750.6	825.4	862.7	920.2	1035.2	1121.4	1135.3
142.5°	657.7	680.0	702.2	707.8	759.4	828.3	862.7	913.3	1014.2	1090.0	1101.9
145°	684.5	704.0	723.3	728.1	771.1	828.4	856.9	898.2	980.8	1042.7	1051.8
147.5°	711.2	730.2	749.1	753.8	788.2	834.1	856.9	889.4	954.4	1003.1	1010.6
150°	728.8	745.9	762.9	767.2	797.1	837.0	856.9	884.4	939.2	980.4	986.5
152.5°	746.8	759.8	772.7	776.0	803.0	838.9	856.9	880.4	927.3	962.4	967.0
155°	773.6	783.3	792.8	795.2	815.8	843.2	856.9	875.6	912.9	940.8	943.9
157.5°	793.4	802.8	812.0	814.4	828.6	847.5	856.9	871.4	900.4	922.1	924.3
160°	806.8	814.1	821.4	823.1	834.4	849.5	856.9	869.4	894.2	912.8	914.0
162.5°	820.2	825.7	831.1	832.5	840.6	851.5	856.9	867.4	888.4	904.1	905.2
165°	834.8	839.7	844.6	845.8	849.6	854.5	856.9	864.4	879.5	890.7	891.9
167.5°	848.2	850.5	852.8	853.4	856.5	860.7	862.7	867.7	877.5	884.9	885.4
170°	856.9	859.3	861.6	862.2	862.4	862.6	862.7	867.7	877.5	884.9	884.9
172.5°	861.6	862.1	862.6	862.7	862.7	862.7	862.7	866.7	874.4	880.2	879.7
175°	868.0	868.0	868.0	868.0	866.2	863.9	862.7	865.2	870.1	873.9	873.9
177.5°	868.0	868.0	868.0	868.0	866.7	864.9	864.0	865.9	869.7	872.6	872.1
180°	868.0	868.0	868.0	868.0	868.0	868.0	868.0	868.0	868.0	868.0	868.0



TEST NUMBER: P938306

CATALOG NUMBER: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	194.8	194.8
2.5°	208.0	206.8
5°	267.6	268.8
7.5°	360.2	359.7
10°	448.0	453.6
12.5°	511.9	513.1
15°	550.8	553.3
17.5°	565.8	566.5
20°	566.5	565.2
22.5°	559.6	558.3
25°	551.4	550.8
27.5°	543.9	544.5
30°	540.7	542.7
32.5°	540.7	543.9
35°	542.0	545.1
37.5°	541.3	545.1
40°	538.8	543.2
42.5°	532.0	535.1
45°	521.3	525.1
47.5°	507.5	510.1
50°	490.0	492.5
52.5°	468.0	468.7
55°	441.8	444.2
57.5°	413.6	414.1
60°	382.2	384.1
62.5°	349.0	349.0
65°	313.9	315.1
67.5°	277.6	280.7
70°	240.6	241.3
72.5°	204.3	204.3
75°	166.6	167.3
77.5°	130.9	130.9
80°	97.1	97.8
82.5°	67.1	68.3
85°	41.9	41.9
87.5°	19.4	17.6
90°	22.1	22.1
92.5°	88.6	71.1
95°	309.1	255.7
97.5°	740.6	639.0
100°	1067.0	946.0
102.5°	1388.1	1284.5
105°	1797.5	1741.8
107.5°	2065.6	2079.1
110°	2167.9	2225.9



TEST NUMBER: P938306

CATALOG NUMBER: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	2177.1	2266.1
115°	2119.3	2242.8
117.5°	1996.9	2133.8
120°	1898.3	2031.4
122.5°	1802.2	1933.5
125°	1665.1	1786.1
127.5°	1541.9	1643.9
130°	1469.3	1563.5
132.5°	1403.3	1487.8
135°	1313.1	1385.9
137.5°	1240.7	1300.2
140°	1190.9	1246.6
142.5°	1149.8	1197.7
145°	1088.1	1124.3
147.5°	1040.7	1070.7
150°	1010.9	1035.2
152.5°	985.4	1003.7
155°	956.0	968.2
157.5°	932.8	941.4
160°	919.0	923.9
162.5°	909.9	914.6
165°	896.8	901.8
167.5°	887.5	889.5
170°	884.9	884.9
172.5°	878.0	876.2
175°	873.9	873.9
177.5°	870.0	868.0
180°	868.0	868.0



TEST NUMBER: P938306
 CATALOG NUMBER: SQ4-FB-150U-050D-B50-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.14	0.64	1.29	2.92	12.61	13.28	13.78	14.43	16.06
	3H	0.16	0.76	1.34	1.92	3.57	14.42	15.02	15.60	16.18	17.82
	4H	0.45	1.02	1.64	2.18	3.83	15.05	15.61	16.23	16.78	18.42
	6H	0.69	1.22	1.88	2.38	4.04	15.46	15.98	16.64	17.14	18.80
	8H	0.76	1.25	1.95	2.43	4.08	15.56	16.06	16.75	17.24	18.89
	12H	0.77	1.24	1.96	2.41	4.08	15.62	16.09	16.81	17.26	18.93
4H	2H	6.64	7.21	7.83	8.37	10.02	12.86	13.43	14.05	14.59	16.24
	3H	8.19	8.66	9.39	9.85	11.51	14.88	15.35	16.07	16.54	18.20
	4H	8.28	8.71	9.47	9.89	11.57	15.62	16.06	16.82	17.24	18.91
	6H	8.28	8.65	9.48	9.85	11.51	16.14	16.51	17.34	17.71	19.38
	8H	8.25	8.60	9.45	9.79	11.47	16.29	16.64	17.49	17.83	19.51
	12H	8.20	8.51	9.41	9.71	11.40	16.36	16.68	17.58	17.88	19.57
8H	4H	9.69	10.04	10.89	11.23	12.92	15.67	16.02	16.87	17.21	18.89
	6H	9.93	10.22	11.15	11.45	13.13	16.27	16.56	17.49	17.79	19.47
	8H	9.94	10.19	11.17	11.40	13.10	16.48	16.74	17.71	17.94	19.64
	12H	9.90	10.12	11.13	11.33	13.06	16.61	16.83	17.84	18.04	19.77
12H	4H	9.82	10.14	11.04	11.34	13.03	15.61	15.93	16.82	17.13	18.82
	6H	10.18	10.43	11.40	11.64	13.34	16.26	16.51	17.48	17.71	19.42
	8H	10.24	10.46	11.47	11.67	13.40	16.47	16.69	17.69	17.89	19.63