

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P622039

Luminaire Tested: VLT-WB-M-0U-100D-930-UNV-STD-W-4

Issue Date: 9/2/2020

**Test Information**

Test Method: LM-79-2019  
Report Number: P622039  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-32)  
Test Lab: INNOVATION CENTER  
Issue Date: 10/28/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: VLT-WB-M-0U-100D-930-UNV-STD-W-4  
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE  
WHITE BAFFLE WITH MEDIUM OPTIC  
DOWNLIGHT 1000 LUMENS PER FOOT  
DIRECT ONLY  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3831.9 lumens  
Efficiency: N/A  
Efficacy: 99.8 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.16 / 1.14  
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')  
CIE Type: Direct

Input Watts (W): 38.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P622039  
CATALOG NUMBER: VLT-WB-M-0U-100D-930-UNV-STD-W-4

### Luminous Intensity Polar Plot

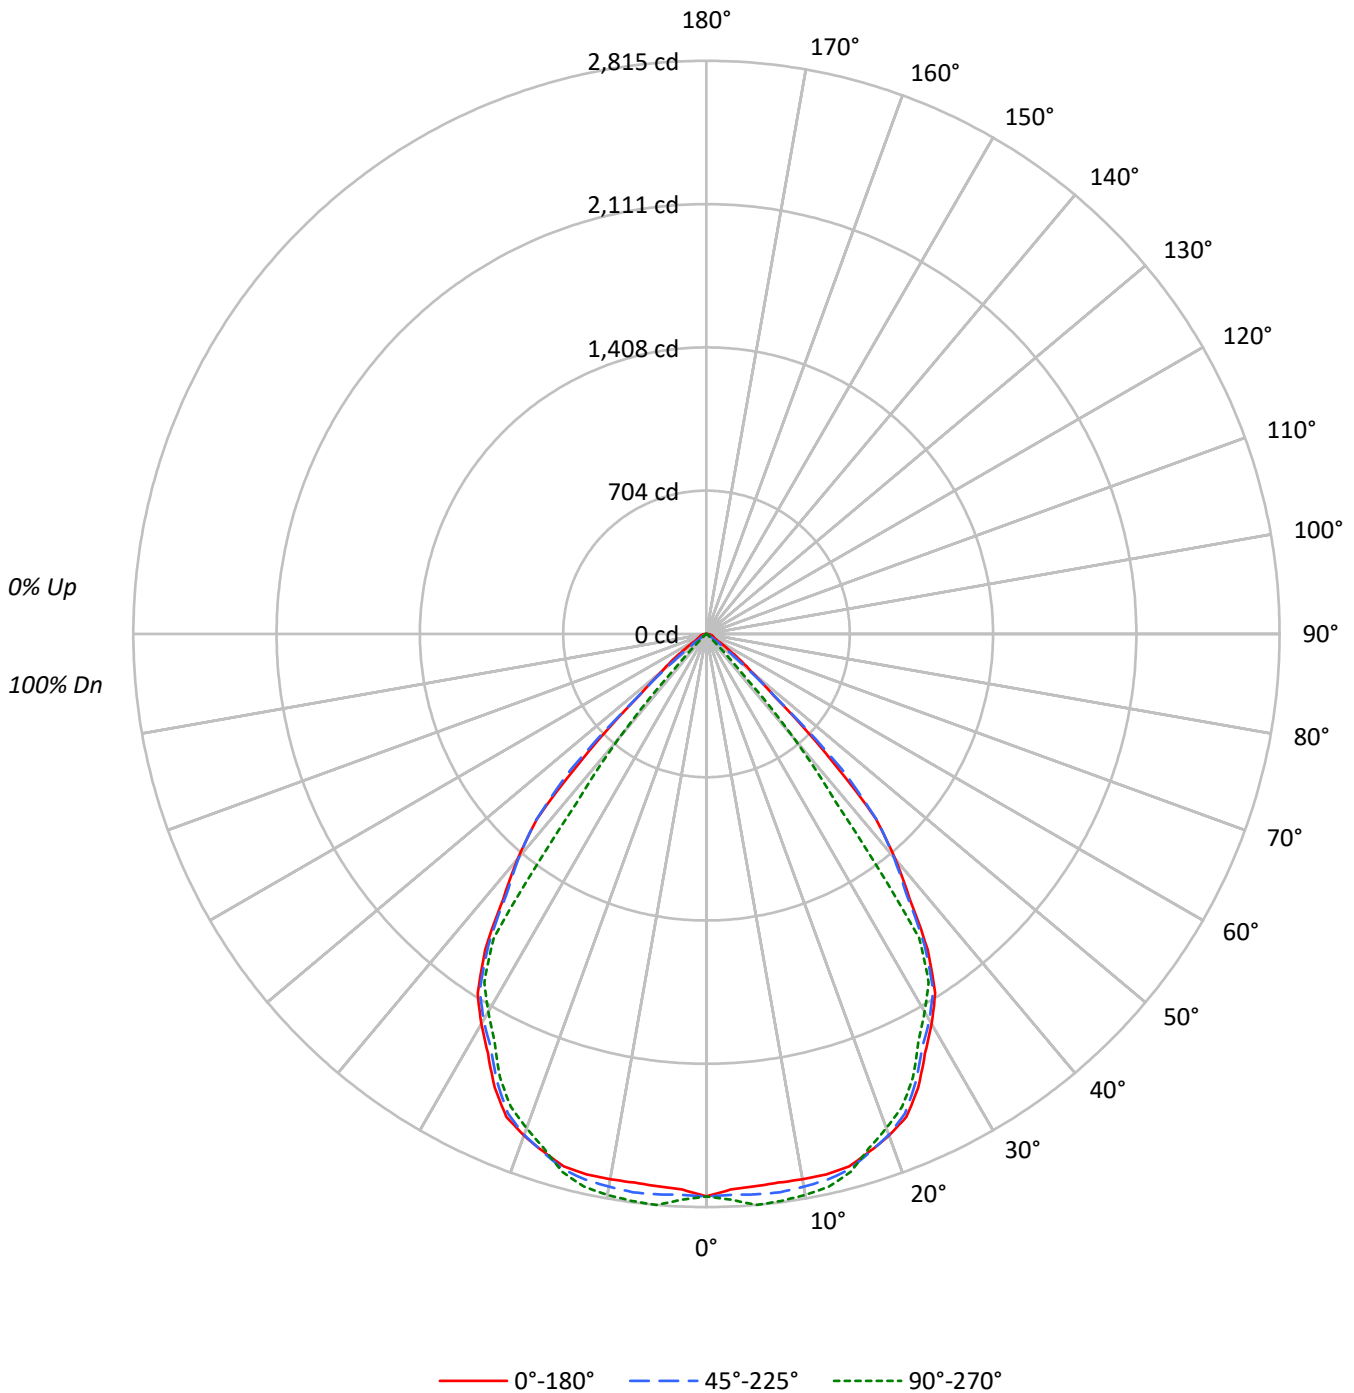



TEST NUMBER: P622039

CATALOG NUMBER: VLT-WB-M-OU-100D-930-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96	95	94	92
2	107	101	97	93	104	100	95	92	96	93	90		93	90	88		90	88	86	84
3	100	93	88	83	98	92	87	83	89	85	81		87	83	80		84	81	79	77
4	95	86	80	75	93	85	79	75	83	78	74		81	77	73		79	75	72	71
5	89	80	73	68	87	79	73	68	77	72	67		75	71	67		74	69	66	65
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	57	77	68	62	57	67	61	57		65	60	56		64	60	56	55
8	74	64	57	53	73	63	57	53	62	56	52		61	56	52		60	55	52	50
9	70	60	53	49	69	59	53	49	58	52	48		57	52	48		56	52	48	47
10	67	56	49	45	65	55	49	45	54	49	45		54	48	45		53	48	45	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	19823	19823	19823
5°	19617	19899	20279
10°	19815	20086	20385
15°	20116	20217	20319
20°	20020	19990	19721
25°	19473	19240	19008
30°	18321	18143	17755
35°	16595	16355	15961
40°	13497	13406	6336
45°	8352	9523	436
50°	3186	2553	262
55°	1565	464	98
60°	758	224	29
65°	698	34	34
70°	657	42	42
75°	652	55	55
80°	645	83	0
85°	642	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 9523 cd/sqm



TEST NUMBER: P622039

CATALOG NUMBER: VLT-WB-M-0U-100D-930-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	263.8	6.9
10°-20°	765.3	20.0
20°-30°	1112.7	29.0
30°-40°	1107.3	28.9
40°-50°	486.9	12.7
50°-60°	71.9	1.9
60°-70°	16.4	0.4
70°-80°	6.1	0.2
80°-90°	1.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2141.8	55.9
0°-40°	3249.1	84.8
0°-60°	3808.0	99.4
0°-90°	3831.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3831.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2762	2762	2762	2762	2762	
5°	2723	2771	2762	2769	2815	260
15°	2708	2765	2721	2695	2735	761
25°	2459	2505	2430	2366	2401	1124
35°	1894	1889	1867	1828	1822	1160
45°	823	936	938	62	43	637
55°	125	135	37	14	8	126
65°	41	35	2	2	2	41
75°	24	4	2	2	2	25
85°	8	0	0	0	0	8
90°	0	0	0	0	0	



TEST NUMBER: P622039

CATALOG NUMBER: VLT-WB-M-OU-100D-930-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2762.4	2762.4	2762.4	2762.4	2762.4
2.5°	2731.1	2772.4	2757.7	2756.7	2781.2
5°	2723.3	2771.1	2762.4	2769.3	2815.2
7.5°	2717.8	2766.0	2765.9	2762.7	2808.5
10°	2719.4	2769.1	2756.5	2751.7	2797.6
12.5°	2719.4	2772.1	2745.6	2733.0	2780.4
15°	2707.7	2765.0	2721.3	2694.9	2735.0
17.5°	2665.4	2727.7	2667.8	2616.1	2649.8
20°	2621.6	2688.5	2617.7	2552.0	2582.5
22.5°	2566.9	2626.2	2548.9	2480.0	2512.2
25°	2459.4	2505.3	2430.0	2366.3	2400.7
27.5°	2323.7	2348.9	2292.8	2231.5	2253.7
30°	2211.1	2230.2	2189.6	2131.2	2142.7
32.5°	2090.7	2103.7	2070.7	2020.1	2030.1
35°	1894.4	1888.6	1867.0	1827.8	1822.0
37.5°	1637.9	1627.9	1614.0	1462.3	1048.7
40°	1440.8	1444.6	1431.1	894.3	676.4
42.5°	1232.8	1256.5	1237.1	609.0	221.3
45°	823.0	935.8	938.4	62.1	43.0
47.5°	445.0	567.7	461.8	38.5	31.3
50°	285.4	356.2	228.7	29.2	23.5
52.5°	204.1	238.1	89.5	22.9	17.2
55°	125.1	134.7	37.1	13.6	7.8
57.5°	74.7	88.8	23.5	5.0	2.0
60°	52.8	62.3	15.6	2.0	2.0
62.5°	46.5	46.9	10.9	2.0	2.0
65°	41.1	35.3	2.0	2.0	2.0
67.5°	36.0	25.6	2.0	2.0	2.0
70°	31.3	17.9	2.0	2.0	2.0
72.5°	28.2	11.7	2.0	2.0	2.0
75°	23.5	4.3	2.0	2.0	2.0
77.5°	18.8	2.3	2.0	1.6	1.6
80°	15.6	2.3	2.0	0.0	0.0
82.5°	12.5	2.2	0.4	0.0	0.0
85°	7.8	0.2	0.0	0.0	0.0
87.5°	3.1	0.1	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P622039

CATALOG NUMBER: VLT-WB-M-OU-100D-930-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.62	7.70	6.99	8.01	8.33	0.00	0.00	0.00	0.00	0.00
	3H	7.08	8.03	7.46	8.36	8.73	0.00	0.00	0.00	0.00	0.00
	4H	7.25	8.13	7.66	8.48	8.87	0.00	0.00	0.00	0.00	0.00
	6H	7.44	8.24	7.86	8.62	9.01	0.00	0.00	0.00	0.00	0.00
	8H	7.53	8.29	7.97	8.68	9.09	0.00	0.00	0.00	0.00	0.00
	12H	7.60	8.32	8.04	8.71	9.14	0.00	0.00	0.00	0.00	0.00
4H	2H	6.35	7.23	6.76	7.58	7.97	0.00	0.00	0.00	0.00	0.00
	3H	6.84	7.55	7.26	7.96	8.36	0.00	0.00	0.00	0.00	0.00
	4H	7.02	7.64	7.45	8.07	8.52	0.00	0.00	0.00	0.00	0.00
	6H	7.25	7.79	7.72	8.24	8.71	0.00	0.00	0.00	0.00	0.00
	8H	7.37	7.87	7.84	8.32	8.79	0.00	0.00	0.00	0.00	0.00
	12H	7.49	7.92	7.98	8.41	8.89	0.00	0.00	0.00	0.00	0.00
8H	4H	6.85	7.35	7.32	7.80	8.27	0.00	0.00	0.00	0.00	0.00
	6H	7.08	7.48	7.59	7.98	8.47	0.00	0.00	0.00	0.00	0.00
	8H	7.20	7.56	7.73	8.08	8.58	0.00	0.00	0.00	0.00	0.00
	12H	7.35	7.66	7.87	8.16	8.74	0.00	0.00	0.00	0.00	0.00
12H	4H	6.79	7.22	7.28	7.71	8.19	0.00	0.00	0.00	0.00	0.00
	6H	7.00	7.36	7.53	7.89	8.38	0.00	0.00	0.00	0.00	0.00
	8H	7.14	7.46	7.67	7.96	8.54	0.00	0.00	0.00	0.00	0.00