

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P621532

Luminaire Tested: VLT-F-125U-050D-930-UNV-STD-W-4

Issue Date: 9/2/2020

Test Information

Test Method: LM-79-2019
Report Number: P621532
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2203-563-1)
Test Lab: INNOVATION CENTER
Issue Date: 9/2/2020
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: VLT-F-125U-050D-930-UNV-STD-W-4
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE
FROSTED LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5883.2 lumens
Efficiency: N/A
Efficacy: 111.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.12 / 1.23
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P621532
CATALOG NUMBER: VLT-F-125U-050D-930-UNV-STD-W-4

Luminous Intensity Polar Plot

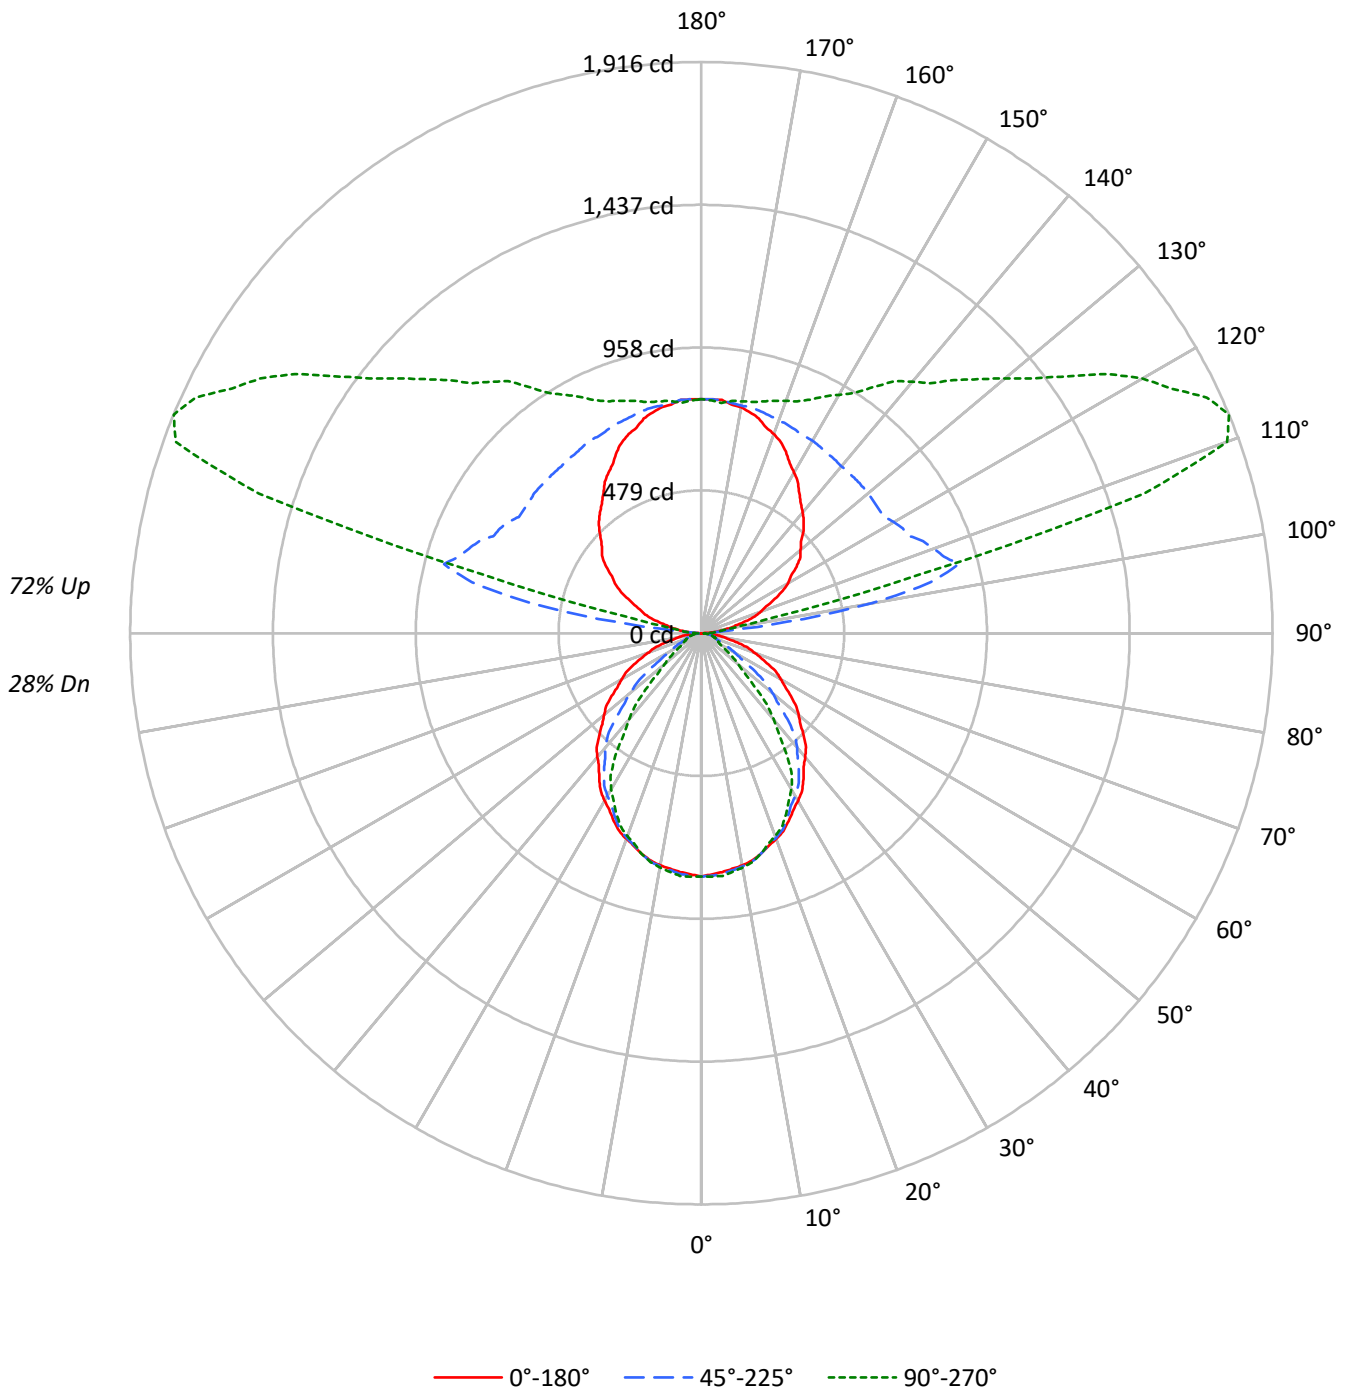



TEST NUMBER: P621532

CATALOG NUMBER: VLT-F-125U-050D-930-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28		
1	93	89	86	82	83	80	77	74	63	61	59	47	46	45	33	32	31	25		
2	85	78	73	68	76	70	66	62	56	52	50	42	40	38	29	28	27	21		
3	78	69	62	57	70	62	57	52	49	45	42	37	35	33	26	25	23	19		
4	71	61	54	48	64	55	49	44	44	40	36	33	31	28	24	22	20	16		
5	66	55	47	42	59	49	43	38	39	35	31	30	27	25	21	20	18	14		
6	60	49	42	36	54	44	38	33	36	31	27	27	24	22	20	18	16	13		
7	56	44	37	32	50	40	34	29	32	28	24	25	22	19	18	16	14	12		
8	52	40	33	28	46	36	30	26	29	25	21	23	20	17	17	14	13	10		
9	48	37	30	25	43	33	27	23	27	22	19	21	18	15	15	13	12	9		
10	45	34	27	22	40	31	25	20	25	20	17	19	16	14	14	12	11	9		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5857	5857	5857
5°	5794	5837	5886
10°	5763	5788	5818
15°	5700	5706	5706
20°	5608	5582	5531
25°	5501	5408	5314
30°	5373	5219	5010
35°	5230	4993	4395
40°	5079	4676	3538
45°	4920	4142	2568
50°	4754	3464	1780
55°	4589	2637	1329
60°	4418	1827	1005
65°	4223	1302	1031
70°	3944	1097	1062
75°	3646	1123	1076
80°	3170	1186	1116
85°	2569	1317	1112

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4920 cd/sqm



TEST NUMBER: P621532

CATALOG NUMBER: VLT-F-125U-050D-930-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.9	1.3
10°-20°	216.3	3.7
20°-30°	314.6	5.3
30°-40°	348.1	5.9
40°-50°	298.8	5.1
50°-60°	206.9	3.5
60°-70°	123.3	2.1
70°-80°	60.7	1.0
80°-90°	20.5	0.3
90°-100°	96.5	1.6
100°-110°	687.8	11.7
110°-120°	933.8	15.9
120°-130°	760.0	12.9
130°-140°	611.2	10.4
140°-150°	481.9	8.2
150°-160°	352.4	6.0
160°-170°	218.9	3.7
170°-180°	74.6	1.3
0°-30°	607.8	10.3
0°-40°	955.8	16.2
0°-60°	1461.6	24.8
0°-90°	1666.1	28.3
90°-120°	1718.1	29.2
90°-150°	3571.3	60.7
90°-180°	4217.0	71.7
0°-180°	5883.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	816	816	816	816	816	
5°	804	817	810	810	817	76
15°	767	777	768	764	768	216
25°	695	700	683	671	671	320
35°	597	595	570	524	502	373
45°	485	477	408	295	253	374
55°	367	351	211	121	106	328
65°	249	200	77	62	61	246
75°	132	57	40	40	39	139
85°	31	16	16	14	14	36
90°	0	5	10	15	15	3
95°	40	73	40	45	54	44
105°	153	235	894	1142	755	161
115°	272	330	770	1601	1871	270
125°	390	443	726	1269	1501	347
135°	484	537	731	1045	1200	372
145°	573	621	736	911	1007	360
155°	672	696	750	825	864	308
165°	746	755	770	790	805	209
175°	785	790	785	780	775	74
180°	785	785	785	785	785	



TEST NUMBER: P621532

CATALOG NUMBER: VLT-F-125U-050D-930-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	816.2	816.2	816.2	816.2	816.2
2.5°	809.5	818.7	814.2	814.3	817.6
5°	804.4	816.8	810.3	809.6	817.1
7.5°	797.0	808.4	801.7	800.8	807.3
10°	790.9	801.6	794.3	792.7	798.5
12.5°	782.1	792.9	784.8	781.9	787.7
15°	767.3	777.2	768.1	764.0	768.1
17.5°	748.6	756.8	746.6	740.0	742.5
20°	734.4	742.7	731.0	721.8	724.3
22.5°	718.9	725.8	712.8	702.3	704.1
25°	694.8	699.7	683.0	671.2	671.2
27.5°	668.0	670.9	651.4	639.1	635.6
30°	648.4	650.1	629.9	615.3	604.6
32.5°	628.2	629.2	606.3	582.8	566.1
35°	597.0	595.3	570.0	524.0	501.7
37.5°	563.8	560.1	530.2	460.1	427.0
40°	542.2	537.2	499.2	414.9	377.7
42.5°	519.9	513.0	464.8	368.2	327.2
45°	484.8	476.6	408.1	295.0	253.0
47.5°	450.1	439.2	350.1	228.5	192.4
50°	425.8	414.3	310.3	188.2	159.4
52.5°	401.5	390.0	269.8	158.0	135.1
55°	366.8	351.1	210.8	121.1	106.2
57.5°	331.4	308.9	157.0	94.3	82.8
60°	307.8	278.1	127.3	78.2	70.0
62.5°	284.8	247.2	104.4	68.3	66.6
65°	248.7	200.1	76.7	61.5	60.7
67.5°	214.3	152.7	57.0	55.5	54.6
70°	188.0	120.4	52.3	51.4	50.6
72.5°	164.4	92.2	47.6	46.7	45.9
75°	131.5	57.3	40.5	39.6	38.8
77.5°	98.3	36.2	33.4	32.5	31.7
80°	76.7	29.7	28.7	27.8	27.0
82.5°	57.8	24.0	23.3	22.4	21.6
85°	31.2	15.5	16.0	14.3	13.5
87.5°	10.8	8.5	9.4	9.0	8.4
90°	0.0	4.8	9.9	14.8	14.8
92.5°	11.8	16.7	21.7	30.7	34.6
95°	39.5	73.3	39.5	44.7	54.3
97.5°	70.1	140.6	290.3	85.6	74.1
100°	93.8	175.9	582.6	171.5	113.6
102.5°	117.5	203.4	788.0	452.6	247.9
105°	153.1	235.1	893.7	1141.7	755.4
107.5°	188.6	250.4	853.2	1661.5	1556.3
110°	212.3	270.2	829.5	1745.9	1876.2



TEST NUMBER: P621532

CATALOG NUMBER: VLT-F-125U-050D-930-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	236.0	293.9	805.8	1696.6	1915.7
115°	271.6	329.5	770.2	1600.9	1871.3
117.5°	308.1	365.1	761.4	1497.4	1775.5
120°	335.7	388.9	745.6	1418.7	1708.4
122.5°	355.5	412.5	725.8	1351.0	1617.5
125°	390.1	443.2	725.8	1269.3	1501.0
127.5°	418.7	472.8	726.8	1174.4	1403.2
130°	434.5	492.4	730.7	1110.9	1328.2
132.5°	454.2	512.2	730.7	1082.4	1261.0
135°	483.9	537.0	730.7	1045.3	1199.8
137.5°	508.6	565.5	730.7	1004.3	1136.6
140°	528.3	581.4	730.7	980.4	1101.1
142.5°	548.1	597.3	734.7	952.5	1065.5
145°	572.7	621.0	735.7	910.7	1007.2
147.5°	602.4	644.9	741.6	880.6	954.9
150°	622.1	660.7	745.6	860.5	923.3
152.5°	641.9	676.6	745.6	844.5	895.7
155°	671.5	695.6	750.5	825.4	864.1
157.5°	695.2	718.4	756.4	813.3	841.3
160°	711.0	730.3	760.4	805.4	829.5
162.5°	722.8	742.2	764.3	801.2	817.6
165°	745.6	755.2	770.2	790.3	804.8
167.5°	758.4	767.1	775.2	785.3	793.9
170°	770.2	775.1	775.2	785.2	790.0
172.5°	774.2	782.9	779.1	781.2	786.0
175°	785.1	789.9	785.1	780.0	775.2
177.5°	785.1	788.9	785.1	785.0	781.1
180°	785.1	785.1	785.1	785.1	785.1



TEST NUMBER: P621532

CATALOG NUMBER: VLT-F-125U-050D-930-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.28	11.96	12.42	13.07	14.63	3.52	4.19	4.65	5.31	6.86
	3H	12.76	13.36	13.90	14.49	16.06	4.86	5.46	6.00	6.58	8.15
	4H	13.27	13.84	14.42	14.96	16.54	5.50	6.07	6.65	7.20	8.77
	6H	13.66	14.18	14.81	15.31	16.89	6.08	6.61	7.24	7.73	9.32
	8H	13.78	14.28	14.94	15.42	17.00	6.30	6.80	7.46	7.94	9.52
	12H	13.86	14.33	15.02	15.46	17.07	6.46	6.93	7.62	8.07	9.67
4H	2H	11.09	11.66	12.25	12.79	14.36	4.11	4.68	5.27	5.81	7.38
	3H	12.71	13.18	13.87	14.34	15.92	5.65	6.12	6.81	7.27	8.86
	4H	13.29	13.73	14.45	14.87	16.47	6.43	6.87	7.60	8.01	9.62
	6H	13.78	14.15	14.94	15.31	16.91	7.16	7.54	8.33	8.70	10.30
	8H	13.96	14.31	15.13	15.46	17.07	7.45	7.80	8.62	8.96	10.57
	12H	14.08	14.40	15.26	15.56	17.18	7.66	7.98	8.85	9.14	10.76
8H	4H	13.20	13.54	14.36	14.70	16.31	6.88	7.22	8.04	8.38	9.99
	6H	13.73	14.01	14.91	15.21	16.82	7.75	8.04	8.94	9.24	10.85
	8H	13.96	14.21	15.15	15.39	17.01	8.15	8.40	9.34	9.57	11.20
	12H	14.14	14.36	15.34	15.53	17.20	8.46	8.68	9.66	9.85	11.52
12H	4H	13.14	13.45	14.32	14.62	16.24	6.92	7.23	8.10	8.40	10.01
	6H	13.70	13.95	14.89	15.12	16.75	7.87	8.12	9.06	9.29	10.92
	8H	13.93	14.15	15.13	15.32	16.99	8.30	8.52	9.50	9.69	11.36