

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P621664

Luminaire Tested: VLT-FA-0U-100D-930-UNV-STD-W-4

Issue Date: 9/2/2020

Test Information

Test Method: LM-79-2019
Report Number: P621664
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-21)
Test Lab: INNOVATION CENTER
Issue Date: 9/2/2020
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: VLT-FA-0U-100D-930-UNV-STD-W-4
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE
LIGHT SHAPING LENS - ASYMMETRIC
DOWNLIGHT 1000 LUMENS PER FOOT
DIRECT ONLY
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2669.5 lumens
Efficiency: N/A
Efficacy: 91.4 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.19 / 1.3
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 29.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P621664
CATALOG NUMBER: VLT-FA-0U-100D-930-UNV-STD-W-4

Luminous Intensity Polar Plot

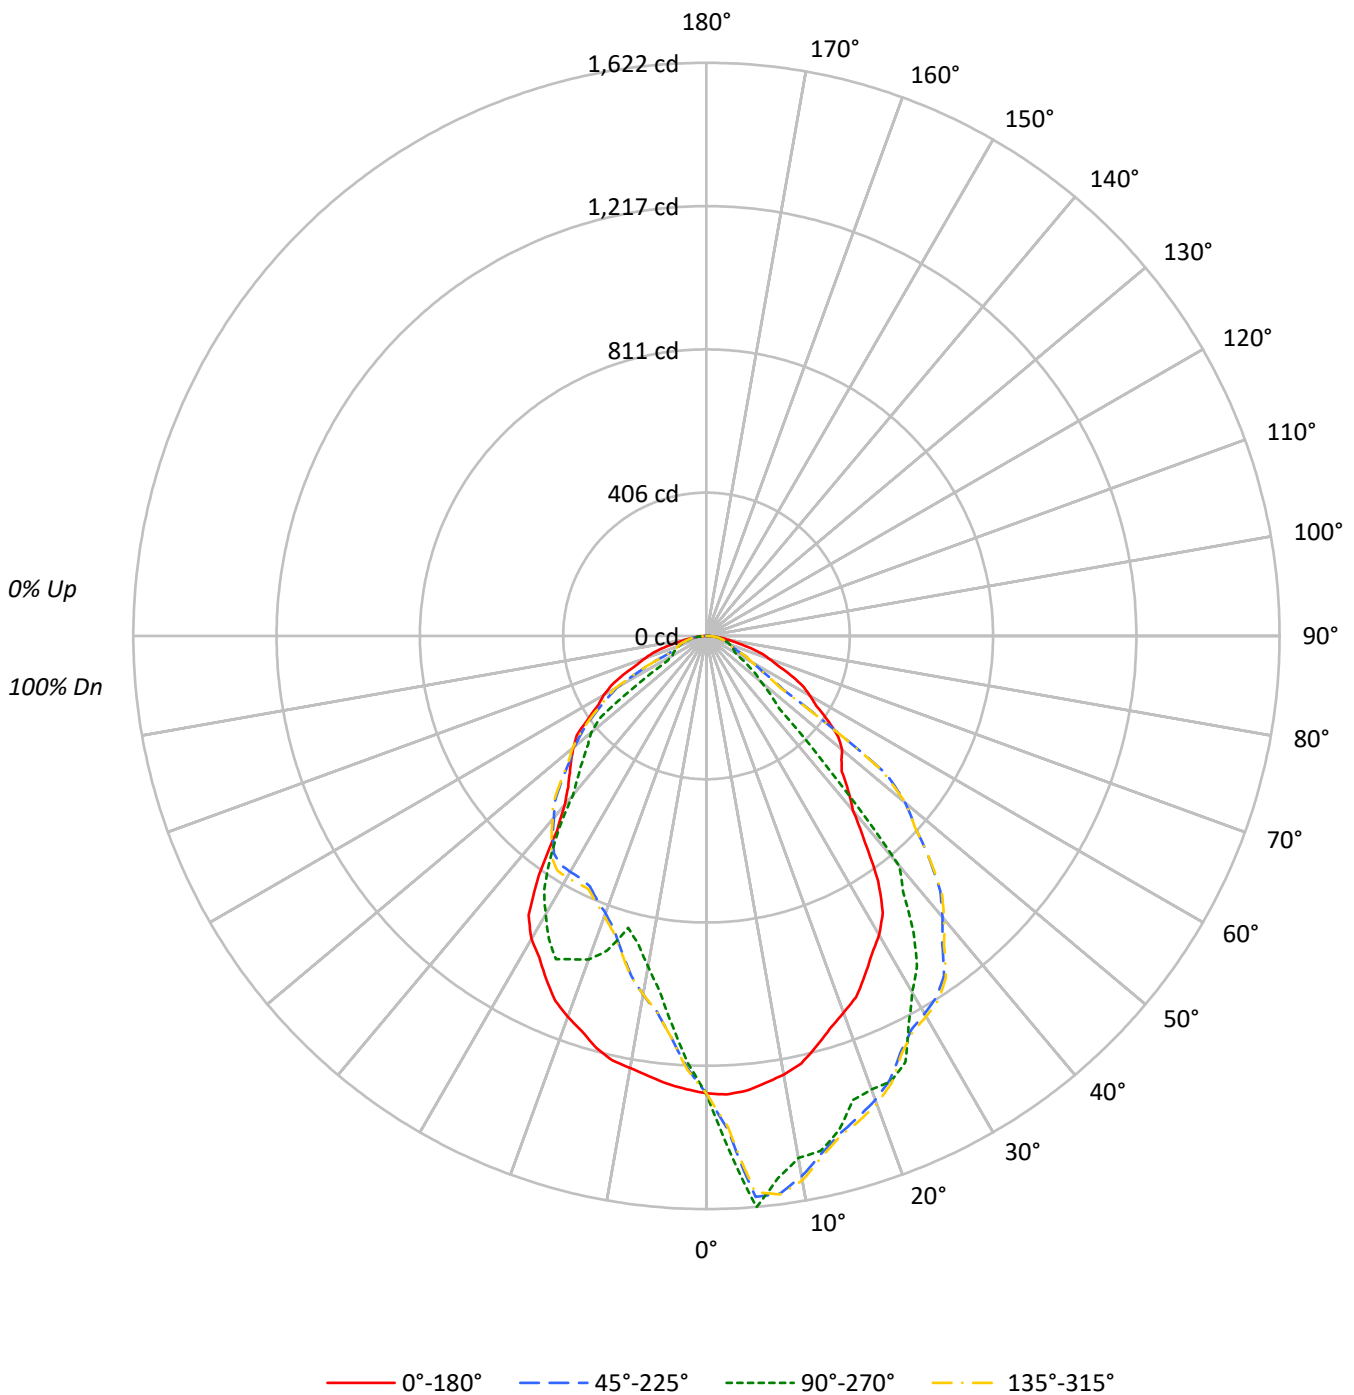



TEST NUMBER: P621664

CATALOG NUMBER: VLT-FA-OU-100D-930-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100									100																			
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88									88																			
2	102	95	89	85	100	93	88	84	90	86	82	87	83	80	84	81	78	76									76																			
3	94	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	68	66									66																			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58									58																			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	54	52									52																			
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46									46																			
7	70	58	50	44	68	57	49	44	56	49	44	54	48	43	53	47	43	41									41																			
8	66	53	45	40	64	52	45	40	51	44	40	50	44	39	49	43	39	37									37																			
9	61	49	41	36	60	48	41	36	47	41	36	46	40	36	45	40	36	34									34																			
10	58	45	38	33	57	45	38	33	44	37	33	43	37	33	42	37	33	31									31																			

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9290	9290	9290	9290
5°	9307	11687	9164	7969
10°	9184	10931	9049	6919
15°	8933	10763	8962	6350
20°	8659	10429	8760	7443
25°	8394	10543	8488	7987
30°	8097	9647	8207	7540
35°	7418	8942	7234	6761
40°	6045	7958	5835	5502
45°	5493	2954	5547	5012
50°	5587	2250	5484	4764
55°	5272	1747	5092	2850
60°	4858	1342	4819	1587
65°	4472	1387	4382	1678
70°	3978	1464	3869	1741
75°	3396	1533	3249	1788
80°	2558	1579	2393	1851
85°	1737	1408	1515	1737

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 10172 cd/sqm



TEST NUMBER: P621664

CATALOG NUMBER: VLT-FA-OU-100D-930-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	124.9	4.7
10°-20°	342.1	12.8
20°-30°	511.9	19.2
30°-40°	582.2	21.8
40°-50°	497.9	18.7
50°-60°	335.8	12.6
60°-70°	173.3	6.5
70°-80°	78.2	2.9
80°-90°	23.3	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	978.9	36.7
0°-40°	1561.1	58.5
0°-60°	2394.7	89.7
0°-90°	2669.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2669.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1295	1295	1295	1295	1295	
5°	1292	1622	1272	1106	1292	122
15°	1202	1449	1206	855	1202	338
25°	1060	1332	1072	1009	1060	488
35°	847	1021	826	772	847	518
45°	541	291	547	494	541	429
55°	421	140	407	228	421	375
65°	263	82	258	99	263	260
75°	122	55	117	64	122	131
85°	21	17	18	21	21	28
90°	0	0	0	0	0	



TEST NUMBER: P621664

CATALOG NUMBER: VLT-FA-OU-100D-930-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	1294.6	1294.6	1294.6	1294.6	1294.6	1294.6	1294.6	1294.6	1294.6	1294.6	1294.6
2.5°	1298.8	1343.1	1398.9	1437.2	1453.7	1437.2	1389.4	1342.8	1284.1	1266.6	1225.1
5°	1292.0	1428.5	1593.6	1613.5	1622.5	1613.5	1579.1	1420.3	1272.2	1209.1	1140.5
7.5°	1276.2	1514.9	1591.7	1547.2	1547.5	1555.7	1594.1	1507.5	1255.6	1156.5	1072.3
10°	1260.4	1563.0	1552.7	1488.5	1500.1	1494.9	1564.6	1553.6	1241.9	1127.3	1031.2
12.5°	1239.3	1578.0	1501.1	1480.1	1492.7	1485.5	1508.8	1569.8	1230.3	1106.5	983.8
15°	1202.4	1556.5	1457.9	1448.7	1448.7	1455.1	1464.5	1563.1	1206.4	1068.6	925.8
17.5°	1164.5	1513.7	1427.9	1382.2	1377.3	1385.8	1438.7	1524.7	1172.4	1026.6	869.7
20°	1133.9	1484.2	1397.3	1343.8	1365.7	1346.4	1409.2	1492.2	1147.1	1000.3	835.0
22.5°	1106.5	1447.5	1358.4	1335.6	1364.7	1336.1	1369.2	1455.5	1117.6	970.8	808.6
25°	1060.2	1386.0	1299.9	1321.2	1331.5	1321.2	1305.1	1391.4	1072.0	933.0	781.0
27.5°	1014.1	1321.1	1256.2	1270.5	1239.0	1263.2	1263.3	1321.3	1025.2	888.9	772.6
30°	977.2	1276.0	1234.0	1213.2	1164.2	1202.9	1243.2	1276.3	990.4	860.3	770.4
32.5°	928.7	1234.7	1211.9	1139.8	1108.4	1134.7	1222.2	1233.9	936.6	834.4	768.3
35°	846.8	1176.5	1172.1	1052.9	1020.7	1045.1	1181.3	1173.4	825.8	793.6	752.0
37.5°	737.0	1124.6	1096.0	965.0	913.7	958.5	1104.7	1119.0	694.6	756.1	713.8
40°	645.3	1089.6	1039.1	899.7	849.5	893.2	1045.7	1086.5	622.9	729.8	671.7
42.5°	593.7	1058.6	979.1	830.5	519.7	820.0	985.6	1054.6	578.7	695.9	634.8
45°	541.3	1002.3	891.6	459.7	291.1	437.9	892.9	988.2	546.6	644.4	578.2
47.5°	518.4	933.0	800.2	276.9	245.8	268.9	799.4	917.8	518.6	592.8	524.2
50°	500.5	889.4	734.9	244.0	201.5	235.0	736.2	875.0	491.2	558.2	487.3
52.5°	471.0	837.2	641.1	202.2	174.1	197.3	625.6	820.8	462.8	520.5	440.9
55°	421.4	736.9	267.4	158.9	139.6	152.5	254.2	712.1	407.0	461.0	387.2
57.5°	369.0	627.3	187.5	123.7	108.3	122.4	186.2	602.2	362.2	390.5	337.7
60°	338.5	553.5	152.8	103.8	93.5	102.5	151.5	531.6	335.8	343.6	292.4
62.5°	307.9	478.7	126.4	91.3	88.2	90.0	126.2	454.6	303.2	303.7	206.0
65°	263.4	362.6	93.5	82.9	81.7	81.7	90.9	349.6	258.1	250.4	118.5
67.5°	218.1	260.3	75.1	76.4	75.1	75.1	73.8	253.0	212.8	199.7	89.6
70°	189.6	199.9	69.8	71.1	69.8	69.8	68.5	194.7	184.4	154.8	84.3
72.5°	162.3	136.5	64.5	64.8	64.5	64.5	63.2	128.1	157.0	108.8	76.9
75°	122.5	68.4	55.3	55.3	55.3	55.3	54.0	65.7	117.2	70.9	65.8
77.5°	85.1	45.2	45.8	45.6	45.6	44.5	44.5	44.8	80.1	48.9	53.2
80°	61.9	37.4	39.5	38.2	38.2	38.2	38.2	36.1	57.9	41.2	44.8
82.5°	44.0	29.8	32.1	30.8	30.8	30.8	30.8	29.5	40.0	33.6	36.3
85°	21.1	19.8	21.1	18.4	17.1	18.4	19.8	19.7	18.4	22.3	23.7
87.5°	6.3	9.4	8.4	6.3	6.3	6.3	7.4	8.4	5.3	10.4	9.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P621664

CATALOG NUMBER: VLT-FA-OU-100D-930-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
0°	1294.6	1294.6	1294.6	1294.6	1294.6	1294.6
2.5°	1210.3	1209.3	1211.3	1229.3	1265.9	1298.8
5°	1102.4	1106.3	1110.1	1140.5	1204.4	1292.0
7.5°	1019.5	1013.8	1022.6	1072.0	1150.5	1276.2
10°	962.4	949.6	962.4	1029.9	1121.3	1260.4
12.5°	908.6	892.7	912.7	986.7	1097.1	1239.3
15°	839.3	854.7	845.7	928.5	1060.8	1202.4
17.5°	855.7	933.5	872.2	877.9	1024.6	1164.5
20°	894.7	974.6	920.5	844.2	1001.3	1133.9
22.5°	930.1	990.4	941.4	815.7	978.0	1106.5
25°	957.3	1008.8	954.7	790.2	944.3	1060.2
27.5°	958.7	965.9	959.2	788.1	902.6	1014.1
30°	941.0	910.0	938.4	790.2	872.9	977.2
32.5°	890.3	855.3	879.5	786.0	843.0	928.7
35°	818.1	771.8	805.2	763.9	796.6	846.8
37.5°	742.0	683.3	729.6	720.1	757.1	737.0
40°	690.4	587.4	680.1	676.9	735.5	645.3
42.5°	624.4	536.8	615.1	642.2	711.7	593.7
45°	504.2	493.9	499.0	583.4	661.0	541.3
47.5°	461.1	454.1	458.5	530.0	603.9	518.4
50°	435.7	426.7	433.1	495.2	567.4	500.5
52.5°	400.6	376.1	398.0	447.8	529.7	471.0
55°	301.2	227.8	300.0	393.8	472.9	421.4
57.5°	176.8	131.7	172.9	342.7	400.7	369.0
60°	119.6	110.6	120.9	301.6	352.6	338.5
62.5°	109.2	106.4	109.5	209.9	309.7	307.9
65°	100.1	98.8	100.1	121.2	255.7	263.4
67.5°	90.6	89.3	91.6	93.0	201.9	218.1
70°	84.3	83.0	84.3	85.6	154.9	189.6
72.5°	76.9	75.6	76.9	78.2	108.9	162.3
75°	65.8	64.5	65.8	67.2	72.3	122.5
77.5°	53.2	53.2	54.5	54.5	50.6	85.1
80°	44.8	44.8	46.1	46.1	43.9	61.9
82.5°	36.3	35.3	37.6	38.7	36.3	44.0
85°	22.4	21.1	23.6	25.0	23.6	21.1
87.5°	8.4	7.4	9.4	11.6	11.5	6.3
90°	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)