

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P621995

Luminaire Tested: VLT-BB-M-150U-125D-935-UNV-STD-W-4

Issue Date: 9/2/2020

Test Information

Test Method: LM-79-2019
Report Number: P621995
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2203-563-26)
Test Lab: INNOVATION CENTER
Issue Date: 10/28/2022
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: VLT-BB-M-150U-125D-935-UNV-STD-W-4
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE
BLACK BAFFLE WITH MEDIUM OPTIC
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9556.0 lumens
Efficiency: N/A
Efficacy: 90.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.18 / 1.14
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 105.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P621995
CATALOG NUMBER: VLT-BB-M-150U-125D-935-UNV-STD-W-4

Luminous Intensity Polar Plot

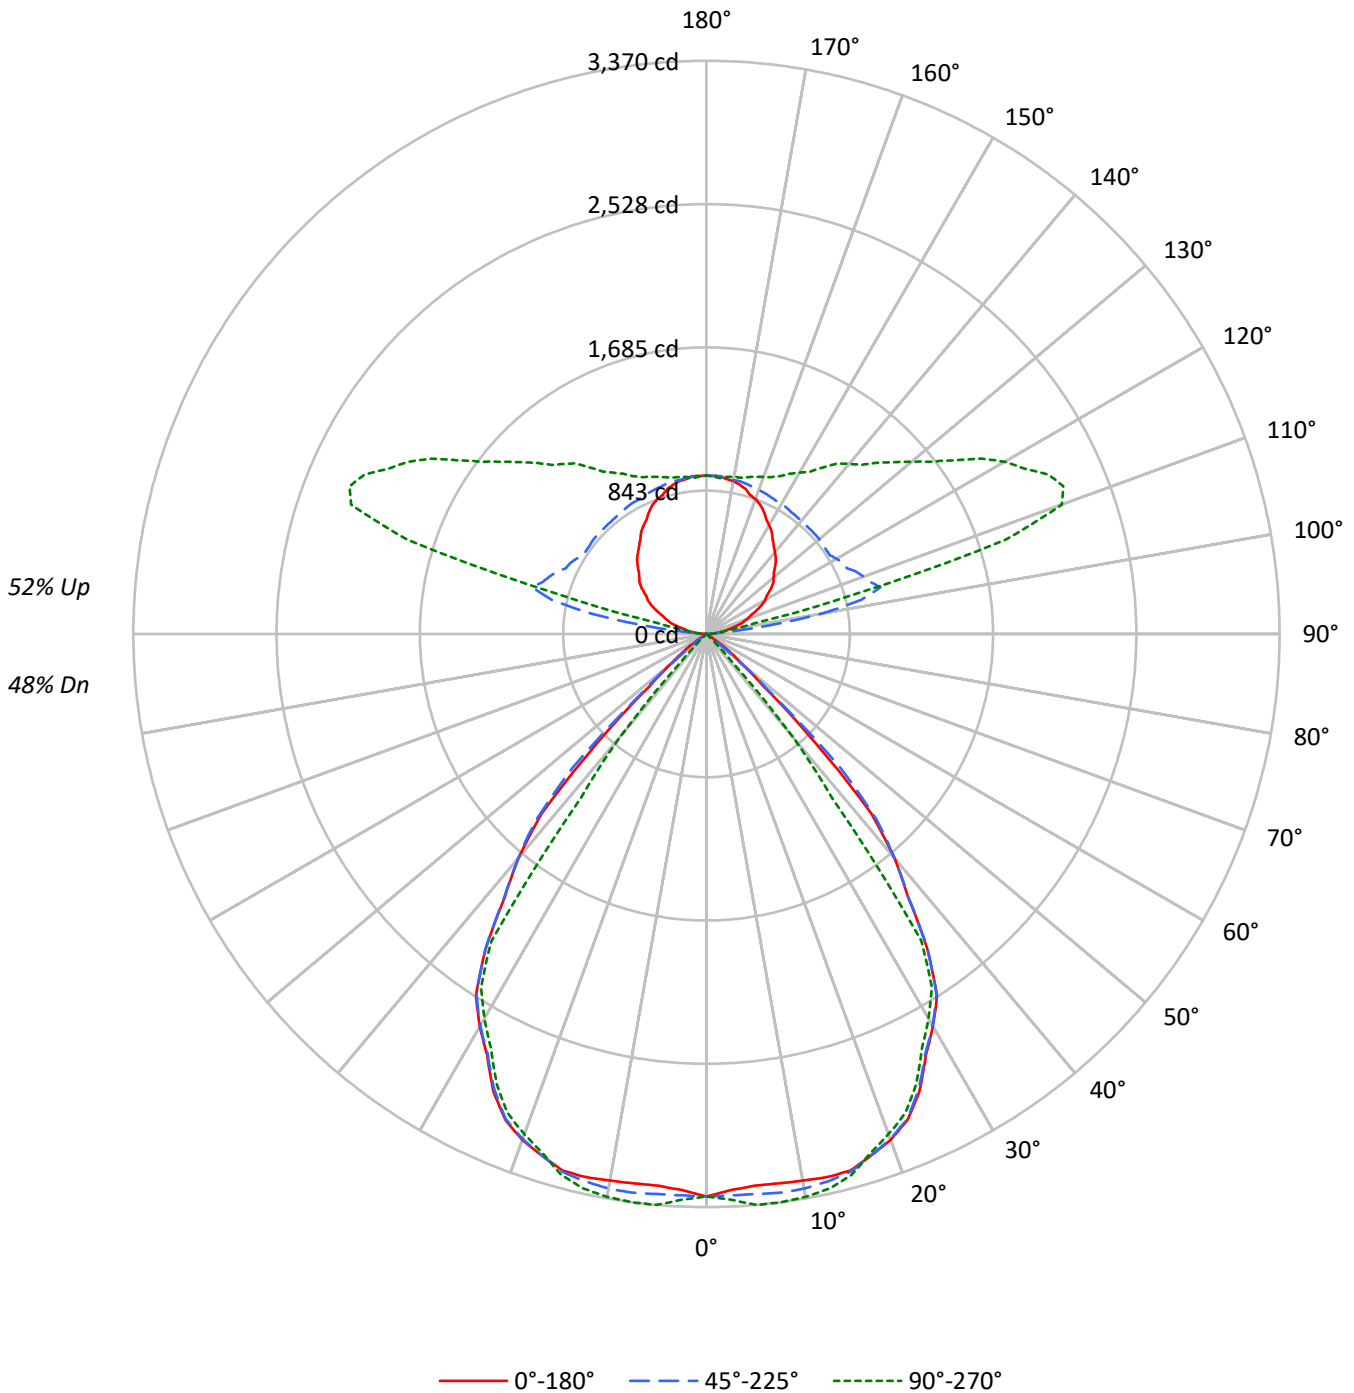



TEST NUMBER: P621995

CATALOG NUMBER: VLT-BB-M-150U-125D-935-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	48																				
1	99	96	93	90	91	88	86	83	75	73	71	62	61	60	51	50	49	44																				
2	92	86	81	77	85	80	76	72	68	65	63	57	55	54	47	46	45	40																				
3	86	78	72	67	79	72	67	63	62	58	55	53	50	48	44	42	41	37																				
4	79	70	64	59	73	66	60	55	57	53	49	49	46	43	41	39	37	34																				
5	74	64	57	52	68	60	54	49	52	48	44	45	42	39	38	36	34	31																				
6	69	58	51	46	64	55	49	44	48	43	40	41	38	35	35	33	31	29																				
7	64	53	46	42	60	50	44	40	44	39	36	38	35	32	33	31	29	26																				
8	60	49	42	38	56	46	40	36	41	36	33	36	32	30	31	28	26	24																				
9	56	45	39	34	52	43	37	33	38	33	30	33	30	27	29	26	24	22																				
10	53	42	35	31	49	40	34	30	35	31	27	31	28	25	27	25	23	21																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	23739	23739	23739
5°	23456	23812	24274
10°	23781	24123	24483
15°	24265	24320	24466
20°	24170	24132	23906
25°	23478	23380	23107
30°	22077	22035	21627
35°	19838	19860	19299
40°	16107	16107	7371
45°	9263	11266	150
50°	2919	2699	137
55°	1018	216	124
60°	70	142	142
65°	42	126	126
70°	52	155	155
75°	0	136	136
80°	0	202	202
85°	0	206	206

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 11266 cd/sqm



TEST NUMBER: P621995

CATALOG NUMBER: VLT-BB-M-150U-125D-935-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	316.1	3.3
10°-20°	922.4	9.7
20°-30°	1347.5	14.1
30°-40°	1334.6	14.0
40°-50°	558.7	5.8
50°-60°	59.8	0.6
60°-70°	8.4	0.1
70°-80°	5.0	0.1
80°-90°	4.5	0.0
90°-100°	114.4	1.2
100°-110°	815.3	8.5
110°-120°	1106.9	11.6
120°-130°	900.9	9.4
130°-140°	724.6	7.6
140°-150°	571.2	6.0
150°-160°	417.7	4.4
160°-170°	259.4	2.7
170°-180°	88.5	0.9
0°-30°	2586.1	27.1
0°-40°	3920.6	41.0
0°-60°	4539.1	47.5
0°-90°	4557.0	47.7
90°-120°	2036.7	21.3
90°-150°	4233.4	44.3
90°-180°	4999.0	52.3
0°-180°	9556.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3308	3308	3308	3308	3308	
5°	3256	3314	3306	3314	3370	311
15°	3266	3334	3274	3250	3293	918
25°	2965	3016	2953	2882	2918	1354
35°	2265	2270	2267	2222	2203	1389
45°	913	1084	1110	22	15	716
55°	81	108	17	12	10	91
65°	2	10	7	7	7	3
75°	0	5	5	5	5	0
85°	0	2	2	2	2	0
90°	0	6	12	18	18	2
95°	47	87	47	53	64	52
105°	181	279	1059	1353	896	191
115°	322	391	913	1898	2218	320
125°	462	525	860	1505	1779	411
135°	574	636	866	1239	1422	441
145°	679	736	872	1080	1194	426
155°	796	825	890	978	1024	365
165°	884	895	913	937	954	248
175°	931	936	931	925	919	88
180°	931	931	931	931	931	



TEST NUMBER: P621995

CATALOG NUMBER: VLT-BB-M-150U-125D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3308.1	3308.1	3308.1	3308.1	3308.1
2.5°	3272.6	3318.9	3304.2	3300.9	3329.9
5°	3256.3	3314.2	3305.7	3314.3	3369.8
7.5°	3257.8	3311.4	3314.6	3314.3	3369.8
10°	3263.7	3319.2	3310.6	3304.5	3360.0
12.5°	3271.6	3329.0	3296.8	3286.7	3340.2
15°	3266.2	3333.7	3273.6	3249.9	3293.3
17.5°	3216.4	3294.5	3215.4	3169.7	3201.6
20°	3165.1	3247.1	3160.1	3096.8	3130.5
22.5°	3092.0	3168.3	3085.1	3012.0	3051.6
25°	2965.2	3015.9	2952.9	2882.2	2918.4
27.5°	2792.6	2821.5	2785.7	2722.0	2744.2
30°	2664.3	2683.6	2659.3	2595.5	2610.0
32.5°	2522.2	2531.8	2517.3	2459.2	2465.9
35°	2264.6	2269.5	2267.1	2222.3	2203.0
37.5°	1946.4	1956.1	1950.4	1755.4	1211.3
40°	1719.4	1729.1	1719.4	1028.2	786.9
42.5°	1435.3	1497.0	1480.6	701.1	224.5
45°	912.8	1084.0	1110.1	22.0	14.8
47.5°	451.0	635.7	522.0	14.3	14.3
50°	261.5	374.9	241.8	12.3	12.3
52.5°	174.7	228.2	70.1	12.3	12.3
55°	81.4	107.9	17.3	12.3	9.9
57.5°	28.6	54.2	11.8	9.9	9.9
60°	4.9	26.6	9.9	9.9	9.9
62.5°	3.0	15.0	9.9	7.9	9.9
65°	2.5	9.7	7.4	7.4	7.4
67.5°	2.5	7.3	7.4	7.4	7.4
70°	2.5	7.3	7.4	7.4	7.4
72.5°	0.5	5.3	5.4	5.5	7.4
75°	0.0	4.8	4.9	4.9	4.9
77.5°	0.0	4.8	4.9	4.9	4.9
80°	0.0	4.8	4.9	4.9	4.9
82.5°	0.0	2.9	3.0	3.0	4.9
85°	0.0	2.4	2.5	2.5	2.5
87.5°	0.0	3.1	4.3	5.5	5.5
90°	0.0	5.7	11.7	17.6	17.6
92.5°	14.0	19.8	25.8	36.4	41.0
95°	46.8	86.9	46.8	52.9	64.4
97.5°	83.1	166.7	344.2	101.5	87.8
100°	111.2	208.5	690.6	203.3	134.6
102.5°	139.3	241.2	934.1	536.5	293.8
105°	181.4	278.7	1059.4	1353.3	895.5
107.5°	223.6	296.8	1011.4	1969.6	1844.8
110°	251.7	320.4	983.3	2069.6	2224.1



TEST NUMBER: P621995

CATALOG NUMBER: VLT-BB-M-150U-125D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	279.8	348.4	955.2	2011.1	2270.9
115°	321.9	390.6	913.1	1897.8	2218.3
117.5°	365.2	432.8	902.5	1775.1	2104.7
120°	398.0	461.0	883.8	1681.7	2025.1
122.5°	421.4	488.9	860.4	1601.5	1917.4
125°	462.4	525.3	860.4	1504.6	1779.3
127.5°	496.3	560.4	861.6	1392.1	1663.4
130°	515.1	583.7	866.2	1316.9	1574.4
132.5°	538.5	607.1	866.2	1283.1	1494.8
135°	573.6	636.5	866.2	1239.1	1422.3
137.5°	602.9	670.4	866.2	1190.5	1347.3
140°	626.3	689.2	866.2	1162.1	1305.2
142.5°	649.7	708.0	870.9	1129.1	1263.1
145°	678.9	736.2	872.1	1079.5	1194.0
147.5°	714.1	764.4	879.1	1043.8	1132.0
150°	737.5	783.3	883.8	1020.1	1094.5
152.5°	760.9	802.1	883.8	1001.1	1061.7
155°	796.0	824.6	889.6	978.5	1024.3
157.5°	824.1	851.6	896.7	964.1	997.3
160°	842.8	865.7	901.4	954.7	983.3
162.5°	856.9	879.8	906.0	949.8	969.2
165°	883.8	895.2	913.1	936.9	954.0
167.5°	899.0	909.3	918.9	930.9	941.2
170°	913.1	918.8	918.9	930.7	936.5
172.5°	917.7	928.0	923.6	926.1	931.8
175°	930.6	936.3	930.6	924.6	918.9
177.5°	930.6	935.2	930.6	930.5	925.9
180°	930.6	930.6	930.6	930.6	930.6



TEST NUMBER: P621995

CATALOG NUMBER: VLT-BB-M-150U-125D-935-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	1.13	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.95	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.83	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.69	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.61	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.54	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.79	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.64	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.55	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.45	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.38	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.30	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.38	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.39	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.37	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.35	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.32	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.35	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.39	0.00	0.00	0.00	0.00	0.00