

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P621551

Luminaire Tested: VLT-F-125U-125D-935-UNV-STD-W-4

Issue Date: 9/2/2020

Test Information

Test Method: LM-79-2019
Report Number: P621551
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2203-563-1)
Test Lab: INNOVATION CENTER
Issue Date: 9/2/2020
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: VLT-F-125U-125D-935-UNV-STD-W-4
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE
FROSTED LENS
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8857.4 lumens
Efficiency: N/A
Efficacy: 115.2 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.12 / 1.23
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 76.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P621551
CATALOG NUMBER: VLT-F-125U-125D-935-UNV-STD-W-4

Luminous Intensity Polar Plot

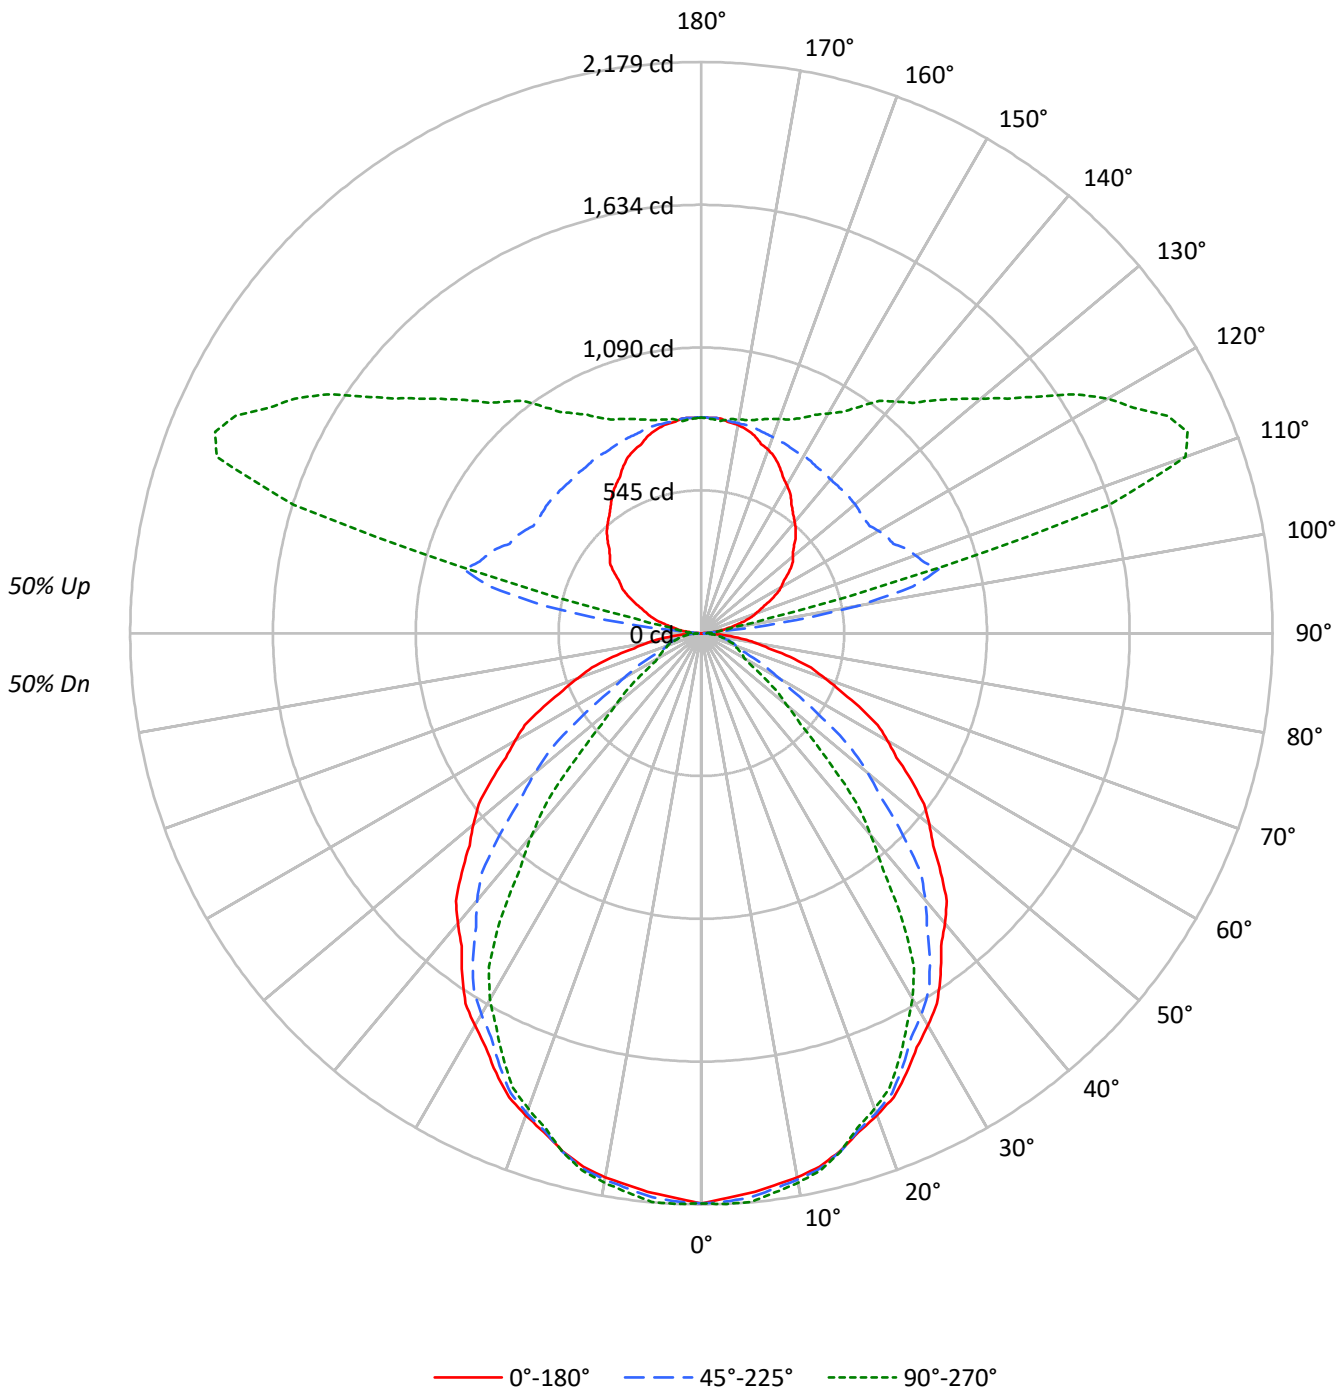



TEST NUMBER: P621551

CATALOG NUMBER: VLT-F-125U-125D-935-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	99	94	91	88	91	87	84	81	74	72	70	62	60	59	51	50	49	44
2	90	83	78	73	83	77	72	68	66	62	59	55	53	50	46	44	42	38
3	83	74	67	61	76	69	63	58	59	54	50	50	46	44	41	39	37	33
4	76	66	58	53	70	61	55	50	53	48	44	45	41	38	37	34	32	29
5	70	59	51	46	65	55	48	43	47	42	38	40	36	33	34	31	29	25
6	65	53	45	40	60	50	43	38	43	38	34	37	33	30	31	28	26	23
7	60	48	41	35	55	45	38	33	39	34	30	34	29	26	28	25	23	20
8	56	44	36	31	52	41	34	30	36	31	27	31	27	24	26	23	21	18
9	52	40	33	28	48	38	31	27	33	28	24	29	24	21	24	21	19	17
10	49	37	30	25	45	35	28	24	30	25	22	26	22	20	23	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15611	15611	15611
5°	15444	15557	15687
10°	15360	15426	15508
15°	15193	15210	15210
20°	14948	14880	14742
25°	14662	14414	14164
30°	14320	13911	13352
35°	13938	13309	11714
40°	13537	12463	9431
45°	13114	11038	6842
50°	12670	9232	4742
55°	12231	7029	3543
60°	11773	4871	2677
65°	11258	3472	2747
70°	10516	2923	2828
75°	9721	2992	2867
80°	8451	3157	2971
85°	6850	3516	2964

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13114 cd/sqm



TEST NUMBER: P621551

CATALOG NUMBER: VLT-F-125U-125D-935-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	205.0	2.3
10°-20°	576.5	6.5
20°-30°	838.5	9.5
30°-40°	927.7	10.5
40°-50°	796.4	9.0
50°-60°	551.5	6.2
60°-70°	328.6	3.7
70°-80°	161.9	1.8
80°-90°	51.8	0.6
90°-100°	101.2	1.1
100°-110°	720.8	8.1
110°-120°	978.6	11.0
120°-130°	796.5	9.0
130°-140°	640.6	7.2
140°-150°	505.0	5.7
150°-160°	369.3	4.2
160°-170°	229.4	2.6
170°-180°	78.2	0.9
0°-30°	1620.0	18.3
0°-40°	2547.6	28.8
0°-60°	3895.5	44.0
0°-90°	4437.9	50.1
90°-120°	1800.6	20.3
90°-150°	3742.6	42.3
90°-180°	4419.0	49.9
0°-180°	8857.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2175	2175	2175	2175	2175	
5°	2144	2177	2160	2158	2178	203
15°	2045	2072	2047	2036	2047	576
25°	1852	1865	1820	1789	1789	852
35°	1591	1587	1519	1396	1337	994
45°	1292	1270	1088	786	674	997
55°	978	936	562	323	283	874
65°	663	533	204	164	162	657
75°	351	153	108	106	103	370
85°	83	41	43	38	36	96
90°	0	5	10	16	16	6
95°	41	77	41	47	57	46
105°	160	246	937	1196	792	169
115°	285	345	807	1678	1961	283
125°	409	464	761	1330	1573	363
135°	507	563	766	1096	1257	390
145°	600	651	771	954	1056	377
155°	704	729	786	865	906	323
165°	781	792	807	828	843	219
175°	823	828	823	817	812	78
180°	823	823	823	823	823	

TEST NUMBER: P621551

CATALOG NUMBER: VLT-F-125U-125D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2175.4	2175.4	2175.4	2175.4	2175.4
2.5°	2157.5	2182.1	2170.1	2170.3	2179.0
5°	2144.0	2176.9	2159.7	2157.9	2177.7
7.5°	2124.2	2154.5	2136.8	2134.5	2151.6
10°	2108.0	2136.6	2117.0	2112.9	2128.3
12.5°	2084.7	2113.2	2091.8	2084.1	2099.5
15°	2045.1	2071.5	2047.3	2036.4	2047.3
17.5°	1995.2	2017.2	1989.8	1972.4	1979.0
20°	1957.5	1979.4	1948.5	1923.9	1930.5
22.5°	1916.1	1934.6	1899.9	1871.7	1876.5
25°	1851.8	1865.0	1820.4	1788.9	1788.9
27.5°	1780.4	1788.3	1736.3	1703.3	1694.1
30°	1728.2	1732.6	1678.8	1639.9	1611.4
32.5°	1674.3	1676.9	1615.9	1553.3	1508.9
35°	1591.1	1586.7	1519.2	1396.5	1337.2
37.5°	1502.6	1492.9	1413.1	1226.4	1138.1
40°	1445.1	1431.9	1330.4	1105.7	1006.8
42.5°	1385.7	1367.3	1238.7	981.4	872.0
45°	1292.2	1270.3	1087.7	786.3	674.2
47.5°	1199.6	1170.6	933.1	609.1	512.8
50°	1134.9	1104.2	827.0	501.7	424.8
52.5°	1070.2	1039.4	719.2	421.1	360.0
55°	977.6	935.9	561.8	322.7	283.2
57.5°	883.2	823.4	418.5	251.5	220.7
60°	820.3	741.2	339.4	208.5	186.5
62.5°	759.2	659.0	278.2	181.9	177.5
65°	663.0	533.3	204.5	164.0	161.8
67.5°	571.3	406.9	151.9	147.8	145.6
70°	501.2	321.0	139.3	137.0	134.8
72.5°	438.2	245.7	126.8	124.5	122.3
75°	350.6	152.8	107.9	105.6	103.4
77.5°	262.0	96.4	89.0	86.7	84.5
80°	204.5	79.3	76.4	74.1	71.9
82.5°	154.2	64.1	62.0	59.7	57.5
85°	83.2	41.4	42.7	38.2	36.0
87.5°	28.8	21.0	21.8	19.2	17.5
90°	0.0	5.1	10.3	15.5	15.5
92.5°	12.4	17.5	22.8	32.2	36.2
95°	41.4	76.8	41.4	46.8	56.9
97.5°	73.5	147.3	304.3	89.8	77.6
100°	98.3	184.3	610.6	179.7	119.0
102.5°	123.2	213.2	825.8	474.3	259.8
105°	160.4	246.4	936.6	1196.4	791.7
107.5°	197.7	262.4	894.1	1741.3	1631.0
110°	222.5	283.2	869.3	1829.7	1966.3



TEST NUMBER: P621551

CATALOG NUMBER: VLT-F-125U-125D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	247.3	308.0	844.5	1778.0	2007.7
115°	284.6	345.3	807.2	1677.8	1961.1
117.5°	322.9	382.6	797.9	1569.3	1860.7
120°	351.9	407.5	781.3	1486.8	1790.3
122.5°	372.6	432.3	760.6	1415.9	1695.1
125°	408.8	464.4	760.6	1330.2	1573.0
127.5°	438.8	495.5	761.7	1230.8	1470.6
130°	455.3	516.1	765.8	1164.2	1391.9
132.5°	476.0	536.8	765.8	1134.3	1321.5
135°	507.1	562.7	765.8	1095.5	1257.4
137.5°	533.0	592.7	765.8	1052.5	1191.1
140°	553.7	609.3	765.8	1027.4	1153.9
142.5°	574.4	626.0	770.0	998.2	1116.6
145°	600.2	650.8	771.0	954.4	1055.6
147.5°	631.3	675.8	777.2	922.8	1000.7
150°	652.0	692.5	781.3	901.8	967.6
152.5°	672.7	709.1	781.3	885.0	938.6
155°	703.7	729.0	786.5	865.0	905.5
157.5°	728.6	752.8	792.7	852.4	881.7
160°	745.1	765.4	796.9	844.0	869.3
162.5°	757.5	777.8	801.0	839.7	856.9
165°	781.3	791.5	807.2	828.3	843.4
167.5°	794.8	803.9	812.4	822.9	832.0
170°	807.2	812.3	812.4	822.8	827.9
172.5°	811.3	820.5	816.5	818.7	823.8
175°	822.7	827.8	822.7	817.4	812.4
177.5°	822.7	826.8	822.7	822.6	818.6
180°	822.7	822.7	822.7	822.7	822.7



TEST NUMBER: P621551

CATALOG NUMBER: VLT-F-125U-125D-935-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.18	17.99	18.15	18.97	20.24	9.41	10.23	10.38	11.20	12.47
	3H	18.67	19.39	19.65	20.38	21.67	10.76	11.49	11.74	12.47	13.77
	4H	19.18	19.87	20.17	20.85	22.16	11.41	12.10	12.41	13.09	14.39
	6H	19.58	20.21	20.58	21.20	22.51	12.00	12.63	13.00	13.62	14.94
	8H	19.71	20.31	20.71	21.31	22.63	12.22	12.82	13.23	13.83	15.15
	12H	19.78	20.35	20.80	21.36	22.69	12.39	12.96	13.40	13.96	15.30
4H	2H	17.00	17.69	18.00	18.68	19.98	10.02	10.71	11.02	11.70	13.00
	3H	18.64	19.20	19.64	20.22	21.54	11.57	12.14	12.58	13.16	14.47
	4H	19.22	19.74	20.24	20.75	22.09	12.36	12.88	13.38	13.89	15.24
	6H	19.71	20.16	20.74	21.19	22.53	13.10	13.55	14.13	14.58	15.92
	8H	19.90	20.32	20.93	21.34	22.70	13.39	13.81	14.42	14.83	16.19
	12H	20.03	20.40	21.07	21.44	22.80	13.61	13.98	14.65	15.02	16.38
8H	4H	19.14	19.55	20.16	20.58	21.93	12.82	13.23	13.84	14.26	15.61
	6H	19.67	20.01	20.72	21.08	22.43	13.70	14.04	14.75	15.11	16.46
	8H	19.91	20.21	20.96	21.26	22.63	14.09	14.39	15.15	15.45	16.82
	12H	20.09	20.36	21.15	21.41	22.82	14.41	14.68	15.47	15.72	17.14
12H	4H	19.09	19.46	20.13	20.50	21.86	12.86	13.24	13.91	14.28	15.64
	6H	19.64	19.95	20.70	21.00	22.37	13.81	14.11	14.87	15.17	16.54
	8H	19.88	20.15	20.94	21.20	22.61	14.25	14.52	15.31	15.57	16.98