

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P621803

Luminaire Tested: VLT-FB-075U-075D-935-UNV-STD-W-4

Issue Date: 9/2/2020

Test Information

Test Method: LM-79-2019
Report Number: P621803
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2203-563-19)
Test Lab: INNOVATION CENTER
Issue Date: 9/2/2020
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: VLT-FB-075U-075D-935-UNV-STD-W-4
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE
LIGHT SHAPING LENS - BATWING
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5032.2 lumens
Efficiency: N/A
Efficacy: 118.7 lumens/watt
Spacing Criteria (0/90/45): 1.05 / 1.83 / 1.75
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 42.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P621803
CATALOG NUMBER: VLT-FB-075U-075D-935-UNV-STD-W-4

Luminous Intensity Polar Plot

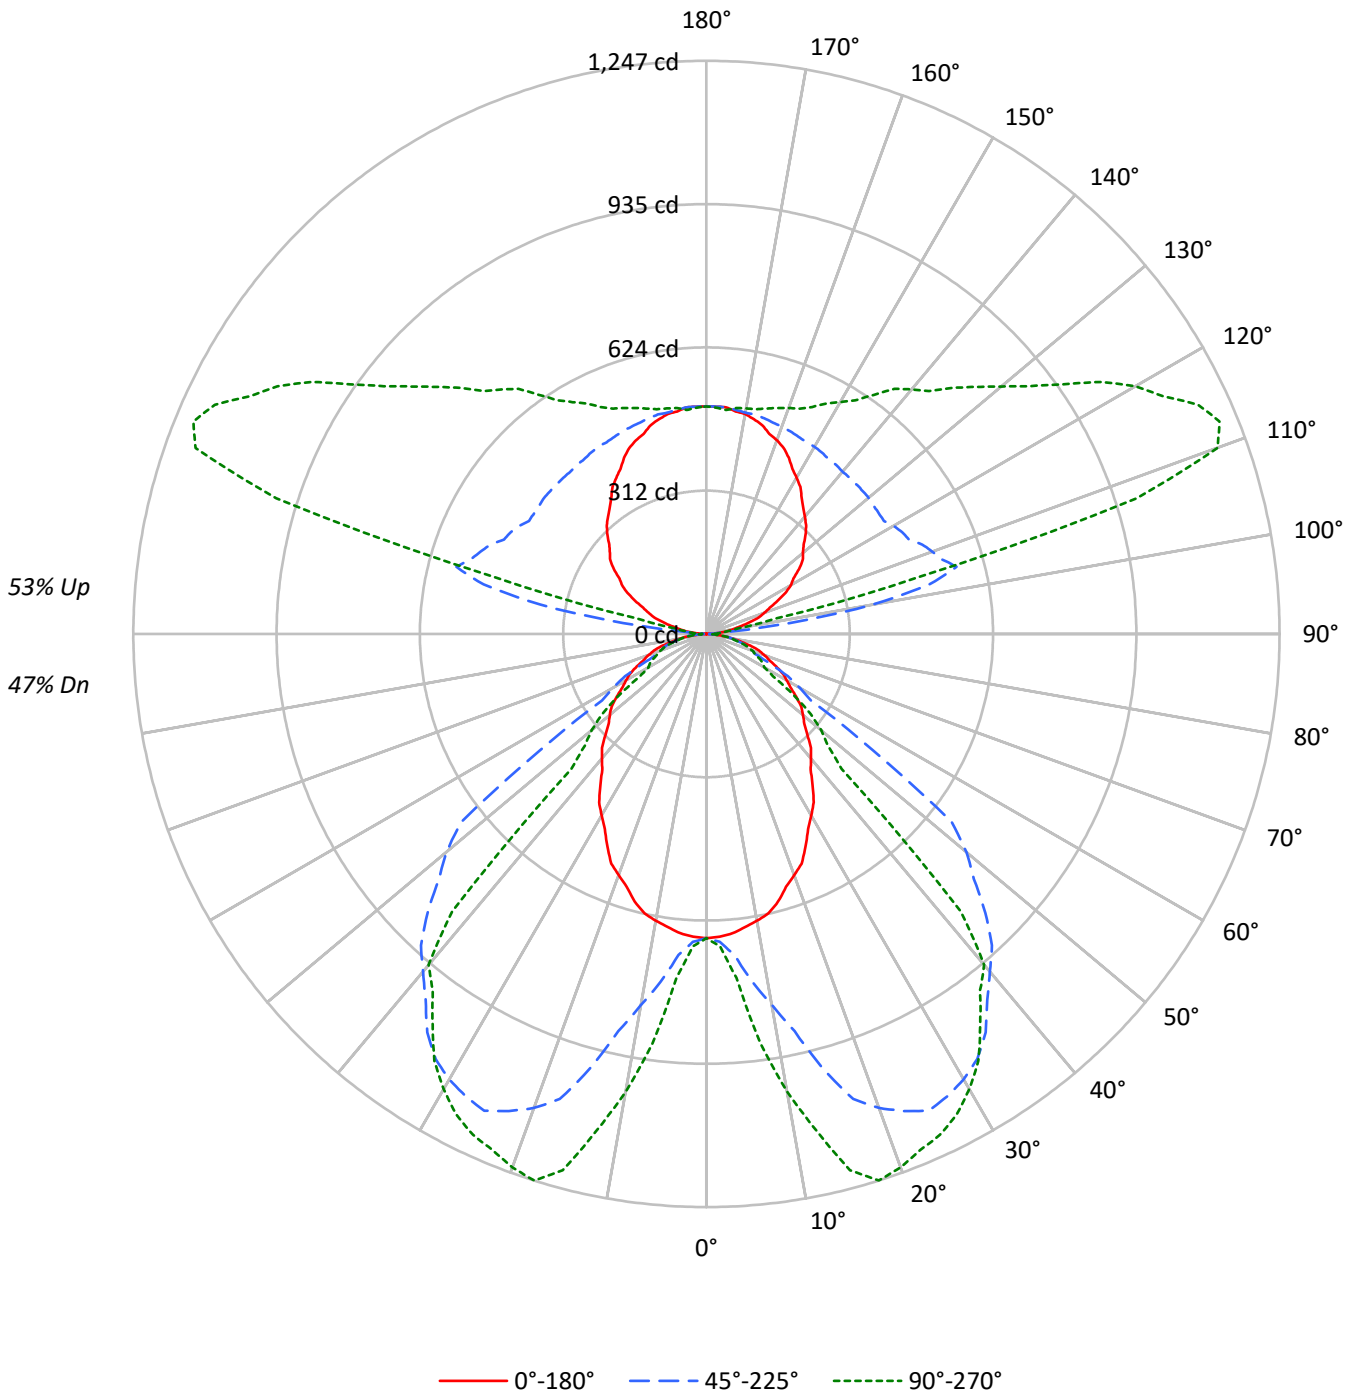



TEST NUMBER: P621803

CATALOG NUMBER: VLT-FB-075U-075D-935-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47
1	98	94	90	87	90	86	83	80	72	70	68	60	58	57	48	47	46	41
2	89	82	77	72	82	76	71	67	64	61	57	53	51	48	43	41	40	35
3	82	73	66	60	75	67	61	56	57	53	49	48	44	42	39	36	35	30
4	75	65	57	51	69	60	53	48	51	46	42	43	39	36	35	32	30	27
5	69	58	50	44	63	54	47	42	46	41	37	38	35	31	32	29	27	23
6	64	52	44	39	59	48	41	36	41	36	32	35	31	28	29	26	23	21
7	59	47	39	34	54	44	37	32	38	32	28	32	28	25	26	23	21	18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17	15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4749	4749	4749
5°	4709	5048	5407
10°	4617	5969	7370
15°	4477	7275	8974
20°	4263	8382	9430
25°	4036	9063	9521
30°	3778	9273	9474
35°	3523	9274	9097
40°	3314	8984	8807
45°	3153	8709	4218
50°	3063	8244	3634
55°	2979	5520	2878
60°	2896	3360	2085
65°	2832	2559	2170
70°	2795	2230	2230
75°	2723	2312	2237
80°	2389	2335	2223
85°	1770	2437	2108

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 8709 cd/sqm



TEST NUMBER: P621803

CATALOG NUMBER: VLT-FB-075U-075D-935-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.4	1.4
10°-20°	263.1	5.2
20°-30°	445.7	8.9
30°-40°	540.7	10.7
40°-50°	475.9	9.5
50°-60°	294.5	5.9
60°-70°	159.7	3.2
70°-80°	91.0	1.8
80°-90°	30.9	0.6
90°-100°	60.9	1.2
100°-110°	433.8	8.6
110°-120°	588.9	11.7
120°-130°	479.3	9.5
130°-140°	385.5	7.7
140°-150°	303.9	6.0
150°-160°	222.2	4.4
160°-170°	138.0	2.7
170°-180°	47.1	0.9
0°-30°	780.2	15.5
0°-40°	1320.9	26.2
0°-60°	2091.3	41.6
0°-90°	2372.8	47.2
90°-120°	1083.5	21.5
90°-150°	2252.2	44.8
90°-180°	2659.0	52.8
0°-180°	5032.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	662	662	662	662	662	
5°	654	675	701	731	751	62
15°	603	695	979	1158	1208	169
25°	510	698	1145	1179	1202	234
35°	402	647	1059	1044	1038	252
45°	311	532	858	727	416	241
55°	238	371	441	255	230	213
65°	167	209	151	129	128	166
75°	98	86	83	82	81	103
85°	22	29	30	27	26	26
90°	0	3	6	9	9	2
95°	25	46	25	28	34	28
105°	96	148	564	720	476	102
115°	171	208	486	1010	1180	170
125°	246	280	458	800	947	219
135°	305	339	461	659	757	235
145°	361	392	464	574	635	227
155°	424	439	473	521	545	194
165°	470	476	486	498	508	132
175°	495	498	495	492	489	47
180°	495	495	495	495	495	



TEST NUMBER: P621803

CATALOG NUMBER: VLT-FB-075U-075D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	661.8	661.8	661.8	661.8	661.8
2.5°	659.6	667.0	670.4	676.9	680.1
5°	653.7	674.8	700.8	730.8	750.6
7.5°	643.2	680.9	763.2	858.0	898.5
10°	633.6	684.8	819.2	956.3	1011.5
12.5°	622.8	688.8	884.8	1051.0	1107.3
15°	602.6	694.7	979.2	1157.9	1207.9
17.5°	576.5	698.3	1061.0	1214.6	1246.7
20°	558.2	699.0	1097.6	1221.7	1234.8
22.5°	541.0	699.6	1123.4	1204.4	1215.4
25°	509.8	697.9	1144.7	1178.9	1202.5
27.5°	478.6	690.1	1134.2	1161.8	1178.9
30°	456.0	682.2	1119.1	1142.0	1143.4
32.5°	434.5	669.1	1096.5	1103.2	1101.4
35°	402.2	646.8	1058.6	1043.7	1038.4
37.5°	372.1	617.2	1003.2	979.2	977.9
40°	353.8	595.8	959.1	936.3	940.2
42.5°	336.5	571.2	919.3	892.6	818.6
45°	310.7	531.7	858.2	727.4	415.6
47.5°	288.4	486.7	789.0	389.6	357.8
50°	274.4	455.9	738.5	342.6	325.5
52.5°	260.4	427.2	672.8	308.1	285.7
55°	238.1	370.9	441.2	255.0	230.0
57.5°	216.8	311.8	269.6	198.2	171.1
60°	201.8	276.7	234.1	159.7	145.3
62.5°	187.8	248.0	199.6	141.7	138.8
65°	166.8	208.9	150.7	129.1	127.8
67.5°	147.2	171.6	114.9	116.2	114.9
70°	133.2	145.0	106.3	107.6	106.3
72.5°	120.3	119.5	97.7	96.8	95.5
75°	98.2	86.4	83.4	82.0	80.7
77.5°	75.1	63.7	67.3	65.9	64.6
80°	57.8	53.9	56.5	55.1	53.8
82.5°	42.8	44.1	45.7	43.3	42.0
85°	21.5	29.4	29.6	26.9	25.6
87.5°	6.5	13.4	13.1	11.5	10.5
90°	0.0	3.0	6.2	9.3	9.3
92.5°	7.5	10.5	13.7	19.4	21.8
95°	24.9	46.2	24.9	28.2	34.3
97.5°	44.2	88.7	183.1	54.0	46.7
100°	59.2	110.9	367.4	108.2	71.6
102.5°	74.1	128.3	497.0	285.4	156.3
105°	96.5	148.3	563.6	720.0	476.4
107.5°	118.9	157.9	538.1	1047.8	981.5
110°	133.9	170.4	523.1	1101.0	1183.2



TEST NUMBER: P621803

CATALOG NUMBER: VLT-FB-075U-075D-935-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	148.8	185.4	508.2	1069.9	1208.1
115°	171.3	207.8	485.8	1009.6	1180.1
117.5°	194.3	230.2	480.1	944.3	1119.7
120°	211.7	245.2	470.2	894.7	1077.4
122.5°	224.2	260.1	457.7	852.0	1020.1
125°	246.0	279.5	457.7	800.5	946.6
127.5°	264.0	298.1	458.3	740.6	884.9
130°	274.0	310.5	460.8	700.6	837.6
132.5°	286.5	323.0	460.8	682.6	795.3
135°	305.2	338.6	460.8	659.2	756.7
137.5°	320.7	356.6	460.8	633.4	716.8
140°	333.2	366.7	460.8	618.3	694.4
142.5°	345.6	376.7	463.3	600.7	672.0
145°	361.2	391.6	464.0	574.3	635.2
147.5°	379.9	406.7	467.7	555.3	602.2
150°	392.3	416.7	470.2	542.7	582.3
152.5°	404.8	426.7	470.2	532.6	564.8
155°	423.5	438.7	473.3	520.6	544.9
157.5°	438.4	453.0	477.0	512.9	530.6
160°	448.4	460.6	479.5	507.9	523.1
162.5°	455.9	468.0	482.0	505.3	515.6
165°	470.2	476.3	485.8	498.4	507.5
167.5°	478.3	483.8	488.9	495.2	500.7
170°	485.8	488.8	488.9	495.2	498.2
172.5°	488.2	493.7	491.4	492.7	495.7
175°	495.1	498.1	495.1	491.9	488.9
177.5°	495.1	497.5	495.1	495.0	492.6
180°	495.1	495.1	495.1	495.1	495.1

(END OF REPORT)