

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P621945

Luminaire Tested: VLT-BB-M-075U-100D-940-UNV-STD-W-4

Issue Date: 9/2/2020

Test Information

Test Method: LM-79-2019
Report Number: P621945
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2203-563-26)
Test Lab: INNOVATION CENTER
Issue Date: 10/28/2022
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: VLT-BB-M-075U-100D-940-UNV-STD-W-4
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE
BLACK BAFFLE WITH MEDIUM OPTIC
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6346.7 lumens
Efficiency: N/A
Efficacy: 102.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.18 / 1.14
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 62.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P621945
CATALOG NUMBER: VLT-BB-M-075U-100D-940-UNV-STD-W-4

Luminous Intensity Polar Plot

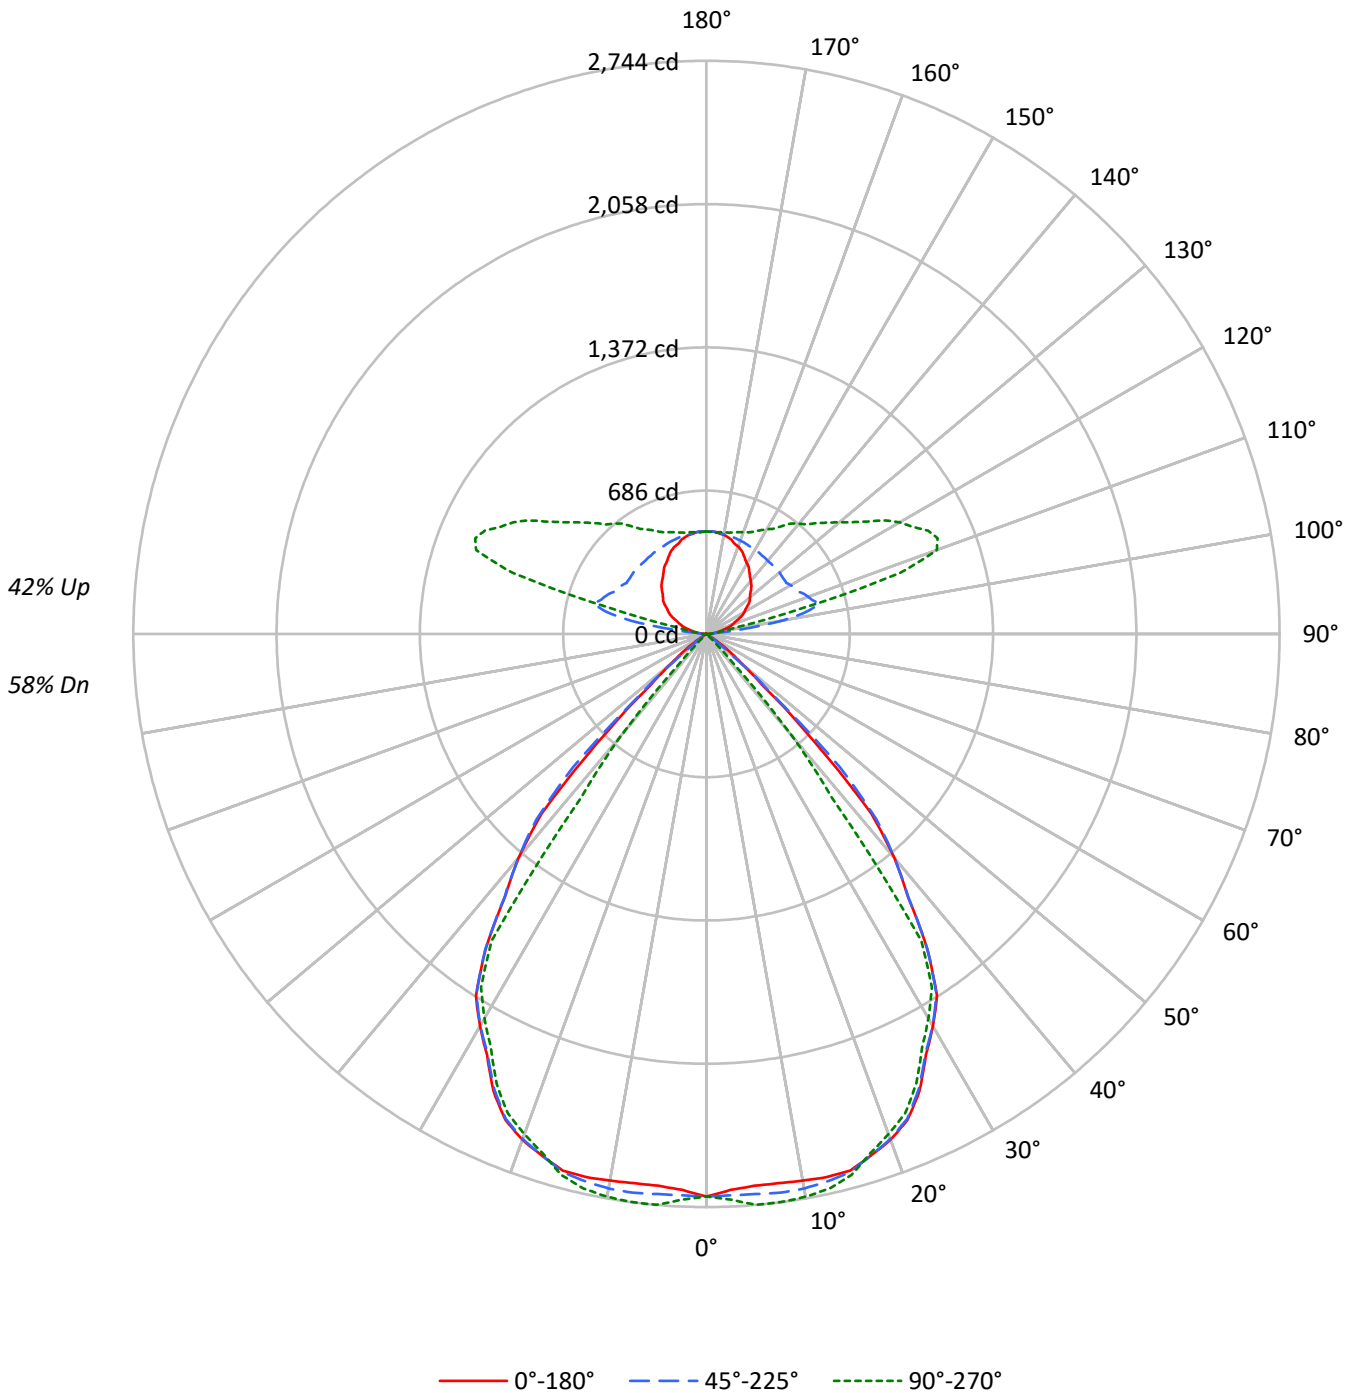



TEST NUMBER: P621945

CATALOG NUMBER: VLT-BB-M-075U-100D-940-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	64	64	64	58				
1	102	99	96	93	95	92	90	87	81	79	77	70	69	68	60	59	59	54				
2	95	89	84	80	89	84	80	76	74	71	68	65	63	61	56	55	53	50				
3	89	81	75	70	83	76	71	67	68	64	61	60	57	55	52	50	49	45				
4	83	74	67	62	77	70	64	60	62	58	54	55	52	49	49	47	45	42				
5	77	67	60	55	72	64	58	53	57	53	49	51	48	45	45	43	41	38				
6	72	62	55	50	68	59	52	48	53	48	44	47	44	41	42	40	37	35				
7	67	57	50	45	63	54	48	43	49	44	40	44	40	37	40	37	34	32				
8	63	52	45	41	59	50	44	40	45	40	37	41	37	34	37	34	32	30				
9	59	48	42	37	56	46	40	36	42	37	34	38	34	32	35	32	29	28				
10	56	45	38	34	53	43	37	33	39	34	31	36	32	29	33	29	27	26				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19328	19328	19328
5°	19098	19387	19763
10°	19363	19640	19933
15°	19756	19801	19920
20°	19678	19648	19464
25°	19115	19036	18813
30°	17974	17941	17608
35°	16152	16170	15712
40°	13114	13114	6002
45°	7541	9172	123
50°	2377	2197	112
55°	829	176	100
60°	57	115	115
65°	34	102	102
70°	42	126	126
75°	0	111	111
80°	0	165	165
85°	0	165	165

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 9172 cd/sqm



TEST NUMBER: P621945

CATALOG NUMBER: VLT-BB-M-075U-100D-940-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	257.4	4.1
10°-20°	751.0	11.8
20°-30°	1097.1	17.3
30°-40°	1086.6	17.1
40°-50°	454.9	7.2
50°-60°	48.7	0.8
60°-70°	6.8	0.1
70°-80°	4.1	0.1
80°-90°	3.1	0.0
90°-100°	60.4	1.0
100°-110°	430.1	6.8
110°-120°	583.9	9.2
120°-130°	475.3	7.5
130°-140°	382.3	6.0
140°-150°	301.4	4.7
150°-160°	220.3	3.5
160°-170°	136.9	2.2
170°-180°	46.7	0.7
0°-30°	2105.5	33.2
0°-40°	3192.1	50.3
0°-60°	3695.6	58.2
0°-90°	3709.6	58.4
90°-120°	1074.4	16.9
90°-150°	2233.3	35.2
90°-180°	2637.0	41.5
0°-180°	6346.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2693	2693	2693	2693	2693	
5°	2651	2698	2691	2698	2744	254
15°	2659	2714	2665	2646	2681	747
25°	2414	2456	2404	2347	2376	1102
35°	1844	1848	1846	1809	1794	1131
45°	743	883	904	18	12	583
55°	66	88	14	10	8	74
65°	2	8	6	6	6	2
75°	0	4	4	4	4	0
85°	0	2	2	2	2	0
90°	0	3	6	9	9	1
95°	25	46	25	28	34	28
105°	96	147	559	714	472	101
115°	170	206	482	1001	1170	169
125°	244	277	454	794	939	217
135°	303	336	457	654	750	233
145°	358	388	460	570	630	225
155°	420	435	469	516	540	193
165°	466	472	482	494	503	131
175°	491	494	491	488	485	46
180°	491	491	491	491	491	



TEST NUMBER: P621945

CATALOG NUMBER: VLT-BB-M-075U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2693.4	2693.4	2693.4	2693.4	2693.4
2.5°	2664.5	2702.2	2690.2	2687.5	2711.1
5°	2651.2	2698.4	2691.4	2698.5	2743.6
7.5°	2652.4	2696.0	2698.6	2698.5	2743.6
10°	2657.3	2702.4	2695.4	2690.4	2735.6
12.5°	2663.7	2710.4	2684.2	2675.9	2719.5
15°	2659.3	2714.3	2665.3	2646.0	2681.4
17.5°	2618.7	2682.3	2617.9	2580.7	2606.6
20°	2576.9	2643.7	2572.9	2521.3	2548.8
22.5°	2517.5	2579.5	2511.8	2452.3	2484.5
25°	2414.2	2455.5	2404.2	2346.6	2376.1
27.5°	2273.6	2297.2	2268.0	2216.2	2234.3
30°	2169.2	2184.9	2165.2	2113.2	2125.0
32.5°	2053.5	2061.4	2049.5	2002.2	2007.7
35°	1843.8	1847.7	1845.8	1809.3	1793.6
37.5°	1584.7	1592.6	1587.9	1429.2	986.2
40°	1399.9	1407.8	1399.9	837.1	640.7
42.5°	1168.6	1218.8	1205.5	570.8	182.8
45°	743.1	882.6	903.8	17.9	12.1
47.5°	367.2	517.6	425.0	11.6	11.6
50°	212.9	305.2	196.8	10.0	10.0
52.5°	142.2	185.8	57.0	10.0	10.0
55°	66.3	87.9	14.1	10.0	8.0
57.5°	23.3	44.1	9.6	8.0	8.0
60°	4.0	21.7	8.0	8.0	8.0
62.5°	2.4	12.2	8.0	6.5	8.0
65°	2.0	7.9	6.0	6.0	6.0
67.5°	2.0	5.9	6.0	6.0	6.0
70°	2.0	5.9	6.0	6.0	6.0
72.5°	0.4	4.3	4.4	4.5	6.0
75°	0.0	3.9	4.0	4.0	4.0
77.5°	0.0	3.9	4.0	4.0	4.0
80°	0.0	3.9	4.0	4.0	4.0
82.5°	0.0	2.4	2.4	2.4	4.0
85°	0.0	2.0	2.0	2.0	2.0
87.5°	0.0	2.2	2.8	3.5	3.5
90°	0.0	3.0	6.2	9.3	9.3
92.5°	7.4	10.4	13.6	19.2	21.6
95°	24.7	45.8	24.7	27.9	34.0
97.5°	43.8	87.9	181.6	53.6	46.3
100°	58.7	110.0	364.3	107.2	71.0
102.5°	73.5	127.2	492.8	283.0	155.0
105°	95.7	147.0	558.9	713.9	472.4
107.5°	117.9	156.6	533.5	1039.0	973.2
110°	132.8	169.0	518.7	1091.8	1173.3



TEST NUMBER: P621945

CATALOG NUMBER: VLT-BB-M-075U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	147.6	183.8	503.9	1060.9	1198.0
115°	169.8	206.0	481.7	1001.2	1170.2
117.5°	192.7	228.3	476.1	936.4	1110.3
120°	210.0	243.2	466.2	887.2	1068.3
122.5°	222.3	257.9	453.9	844.9	1011.5
125°	243.9	277.1	453.9	793.7	938.6
127.5°	261.8	295.6	454.5	734.4	877.5
130°	271.7	307.9	457.0	694.7	830.6
132.5°	284.1	320.3	457.0	676.9	788.6
135°	302.6	335.8	457.0	653.7	750.3
137.5°	318.0	353.7	457.0	628.1	710.8
140°	330.4	363.6	457.0	613.1	688.5
142.5°	342.7	373.5	459.4	595.7	666.3
145°	358.2	388.4	460.1	569.5	629.9
147.5°	376.7	403.3	463.8	550.7	597.2
150°	389.0	413.2	466.2	538.1	577.4
152.5°	401.4	423.1	466.2	528.1	560.1
155°	419.9	435.0	469.3	516.2	540.3
157.5°	434.7	449.2	473.0	508.6	526.1
160°	444.6	456.7	475.5	503.6	518.7
162.5°	452.0	464.1	478.0	501.0	511.3
165°	466.2	472.3	481.7	494.2	503.3
167.5°	474.3	479.7	484.8	491.1	496.5
170°	481.7	484.7	484.8	491.0	494.0
172.5°	484.1	489.6	487.2	488.5	491.6
175°	490.9	494.0	490.9	487.8	484.8
177.5°	490.9	493.4	490.9	490.9	488.5
180°	490.9	490.9	490.9	490.9	490.9



TEST NUMBER: P621945

CATALOG NUMBER: VLT-BB-M-075U-100D-940-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.09	1.25	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	1.07	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.95	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.81	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.74	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.67	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.91	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.76	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.67	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.57	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.50	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.42	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.50	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.51	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.49	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.48	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.44	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.47	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.51	0.00	0.00	0.00	0.00	0.00