

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P621969

Luminaire Tested: VLT-BB-M-100U-100D-940-UNV-STD-W-4

Issue Date: 9/2/2020

Test Information

Test Method: LM-79-2019
Report Number: P621969
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2203-563-26)
Test Lab: INNOVATION CENTER
Issue Date: 10/28/2022
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: VLT-BB-M-100U-100D-940-UNV-STD-W-4
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE
BLACK BAFFLE WITH MEDIUM OPTIC
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 1000 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7212.8 lumens
Efficiency: N/A
Efficacy: 100.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.18 / 1.14
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P621969
CATALOG NUMBER: VLT-BB-M-100U-100D-940-UNV-STD-W-4

Luminous Intensity Polar Plot

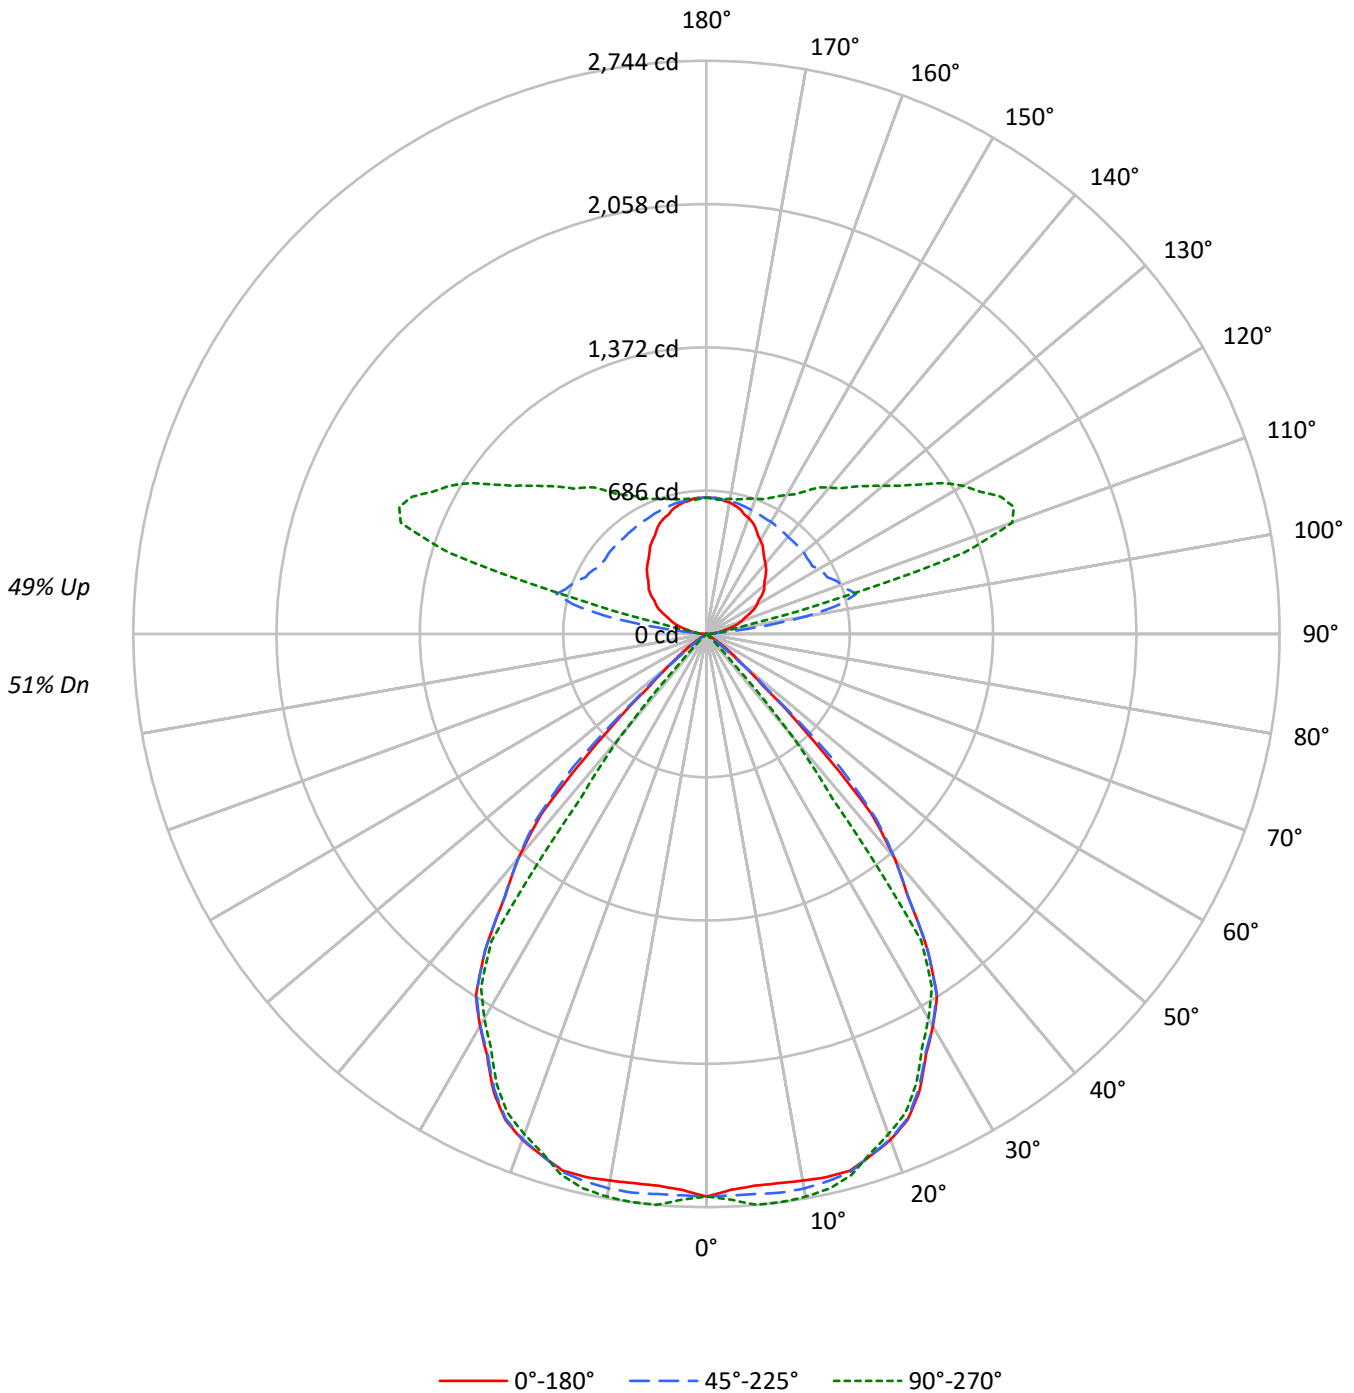



TEST NUMBER: P621969

CATALOG NUMBER: VLT-BB-M-100U-100D-940-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51				51
1	100	97	94	91	93	90	87	85	77	75	73	65	64	63	54	53	53	48				48
2	93	87	82	78	86	81	77	73	70	67	65	60	58	56	50	49	48	44				44
3	87	79	73	68	80	74	69	64	64	60	57	55	53	50	47	45	44	40				40
4	81	72	65	60	75	67	61	57	59	54	51	51	48	45	44	42	40	37				37
5	75	65	58	53	70	61	55	51	54	49	46	47	44	41	41	38	36	34				34
6	70	59	53	48	65	56	50	45	50	45	41	44	40	37	38	35	33	31				31
7	65	55	48	43	61	52	45	41	46	41	38	40	37	34	35	33	31	28				28
8	61	50	43	39	57	48	41	37	42	38	34	38	34	31	33	30	28	26				26
9	57	46	40	35	54	44	38	34	39	35	31	35	31	29	31	28	26	24				24
10	54	43	37	32	50	41	35	31	37	32	29	33	29	27	29	26	24	22				22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19328	19328	19328
5°	19098	19387	19763
10°	19363	19640	19933
15°	19756	19801	19920
20°	19678	19648	19464
25°	19115	19036	18813
30°	17974	17941	17608
35°	16152	16170	15712
40°	13114	13114	6002
45°	7541	9172	123
50°	2377	2197	112
55°	829	176	100
60°	57	115	115
65°	34	102	102
70°	42	126	126
75°	0	111	111
80°	0	165	165
85°	0	165	165

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 9172 cd/sqm



TEST NUMBER: P621969

CATALOG NUMBER: VLT-BB-M-100U-100D-940-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	257.4	3.6
10°-20°	751.0	10.4
20°-30°	1097.1	15.2
30°-40°	1086.6	15.1
40°-50°	454.9	6.3
50°-60°	48.7	0.7
60°-70°	6.8	0.1
70°-80°	4.1	0.1
80°-90°	3.4	0.0
90°-100°	80.2	1.1
100°-110°	571.3	7.9
110°-120°	775.6	10.8
120°-130°	631.3	8.8
130°-140°	507.7	7.0
140°-150°	400.3	5.5
150°-160°	292.7	4.1
160°-170°	181.8	2.5
170°-180°	62.0	0.9
0°-30°	2105.5	29.2
0°-40°	3192.1	44.3
0°-60°	3695.6	51.2
0°-90°	3709.9	51.4
90°-120°	1427.1	19.8
90°-150°	2966.4	41.1
90°-180°	3503.0	48.6
0°-180°	7212.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2693	2693	2693	2693	2693	
5°	2651	2698	2691	2698	2744	254
15°	2659	2714	2665	2646	2681	747
25°	2414	2456	2404	2347	2376	1102
35°	1844	1848	1846	1809	1794	1131
45°	743	883	904	18	12	583
55°	66	88	14	10	8	74
65°	2	8	6	6	6	2
75°	0	4	4	4	4	0
85°	0	2	2	2	2	0
90°	0	4	8	12	12	1
95°	33	61	33	37	45	37
105°	127	195	742	948	628	134
115°	226	274	640	1330	1554	224
125°	324	368	603	1054	1247	288
135°	402	446	607	868	997	309
145°	476	516	611	756	837	299
155°	558	578	623	686	718	256
165°	619	627	640	656	668	174
175°	652	656	652	648	644	62
180°	652	652	652	652	652	



TEST NUMBER: P621969

CATALOG NUMBER: VLT-BB-M-100U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2693.4	2693.4	2693.4	2693.4	2693.4
2.5°	2664.5	2702.2	2690.2	2687.5	2711.1
5°	2651.2	2698.4	2691.4	2698.5	2743.6
7.5°	2652.4	2696.0	2698.6	2698.5	2743.6
10°	2657.3	2702.4	2695.4	2690.4	2735.6
12.5°	2663.7	2710.4	2684.2	2675.9	2719.5
15°	2659.3	2714.3	2665.3	2646.0	2681.4
17.5°	2618.7	2682.3	2617.9	2580.7	2606.6
20°	2576.9	2643.7	2572.9	2521.3	2548.8
22.5°	2517.5	2579.5	2511.8	2452.3	2484.5
25°	2414.2	2455.5	2404.2	2346.6	2376.1
27.5°	2273.6	2297.2	2268.0	2216.2	2234.3
30°	2169.2	2184.9	2165.2	2113.2	2125.0
32.5°	2053.5	2061.4	2049.5	2002.2	2007.7
35°	1843.8	1847.7	1845.8	1809.3	1793.6
37.5°	1584.7	1592.6	1587.9	1429.2	986.2
40°	1399.9	1407.8	1399.9	837.1	640.7
42.5°	1168.6	1218.8	1205.5	570.8	182.8
45°	743.1	882.6	903.8	17.9	12.1
47.5°	367.2	517.6	425.0	11.6	11.6
50°	212.9	305.2	196.8	10.0	10.0
52.5°	142.2	185.8	57.0	10.0	10.0
55°	66.3	87.9	14.1	10.0	8.0
57.5°	23.3	44.1	9.6	8.0	8.0
60°	4.0	21.7	8.0	8.0	8.0
62.5°	2.4	12.2	8.0	6.5	8.0
65°	2.0	7.9	6.0	6.0	6.0
67.5°	2.0	5.9	6.0	6.0	6.0
70°	2.0	5.9	6.0	6.0	6.0
72.5°	0.4	4.3	4.4	4.5	6.0
75°	0.0	3.9	4.0	4.0	4.0
77.5°	0.0	3.9	4.0	4.0	4.0
80°	0.0	3.9	4.0	4.0	4.0
82.5°	0.0	2.4	2.4	2.4	4.0
85°	0.0	2.0	2.0	2.0	2.0
87.5°	0.0	2.4	3.2	4.1	4.1
90°	0.0	4.0	8.2	12.3	12.3
92.5°	9.8	13.9	18.0	25.5	28.7
95°	32.8	60.9	32.8	37.1	45.1
97.5°	58.2	116.8	241.2	71.1	61.5
100°	77.9	146.1	483.9	142.5	94.3
102.5°	97.6	169.0	654.6	375.9	205.9
105°	127.1	195.3	742.3	948.3	627.5
107.5°	156.7	208.0	708.7	1380.1	1292.7
110°	176.4	224.5	689.0	1450.2	1558.5



TEST NUMBER: P621969

CATALOG NUMBER: VLT-BB-M-100U-100D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	196.0	244.2	669.3	1409.2	1591.3
115°	225.6	273.7	639.8	1329.8	1554.4
117.5°	255.9	303.2	632.4	1243.8	1474.8
120°	278.9	323.0	619.3	1178.4	1419.0
122.5°	295.3	342.6	602.9	1122.2	1343.6
125°	324.0	368.1	602.9	1054.3	1246.8
127.5°	347.8	392.7	603.7	975.5	1165.6
130°	360.9	409.0	607.0	922.8	1103.2
132.5°	377.3	425.4	607.0	899.1	1047.5
135°	401.9	446.0	607.0	868.3	996.6
137.5°	422.4	469.7	607.0	834.2	944.1
140°	438.8	482.9	607.0	814.3	914.6
142.5°	455.2	496.1	610.3	791.2	885.1
145°	475.7	515.8	611.1	756.5	836.7
147.5°	500.4	535.6	616.0	731.4	793.2
150°	516.8	548.8	619.3	714.8	766.9
152.5°	533.2	562.0	619.3	701.5	744.0
155°	557.8	577.8	623.4	685.6	717.7
157.5°	577.5	596.7	628.3	675.6	698.9
160°	590.6	606.6	631.6	669.0	689.0
162.5°	600.4	616.5	634.9	665.5	679.2
165°	619.3	627.3	639.8	656.5	668.5
167.5°	630.0	637.2	643.9	652.3	659.5
170°	639.8	643.8	643.9	652.2	656.2
172.5°	643.1	650.3	647.2	648.9	652.9
175°	652.1	656.1	652.1	647.9	643.9
177.5°	652.1	655.3	652.1	652.0	648.8
180°	652.1	652.1	652.1	652.1	652.1



TEST NUMBER: P621969

CATALOG NUMBER: VLT-BB-M-100U-100D-940-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.73	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.54	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.42	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.29	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.21	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.14	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.38	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.24	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.14	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.04	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00