

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P622026

Luminaire Tested: VLT-WB-M-075U-075D-940-UNV-STD-W-4

Issue Date: 9/2/2020

Test Information

Test Method: LM-79-2019
Report Number: P622026
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2203-563-32)
Test Lab: INNOVATION CENTER
Issue Date: 10/28/2022
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: VLT-WB-M-075U-075D-940-UNV-STD-W-4
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE
WHITE BAFFLE WITH MEDIUM OPTIC
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5634.4 lumens
Efficiency: N/A
Efficacy: 109.0 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.16 / 1.14
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 51.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P622026

CATALOG NUMBER: VLT-WB-M-075U-075D-940-UNV-STD-W-4

Luminous Intensity Polar Plot

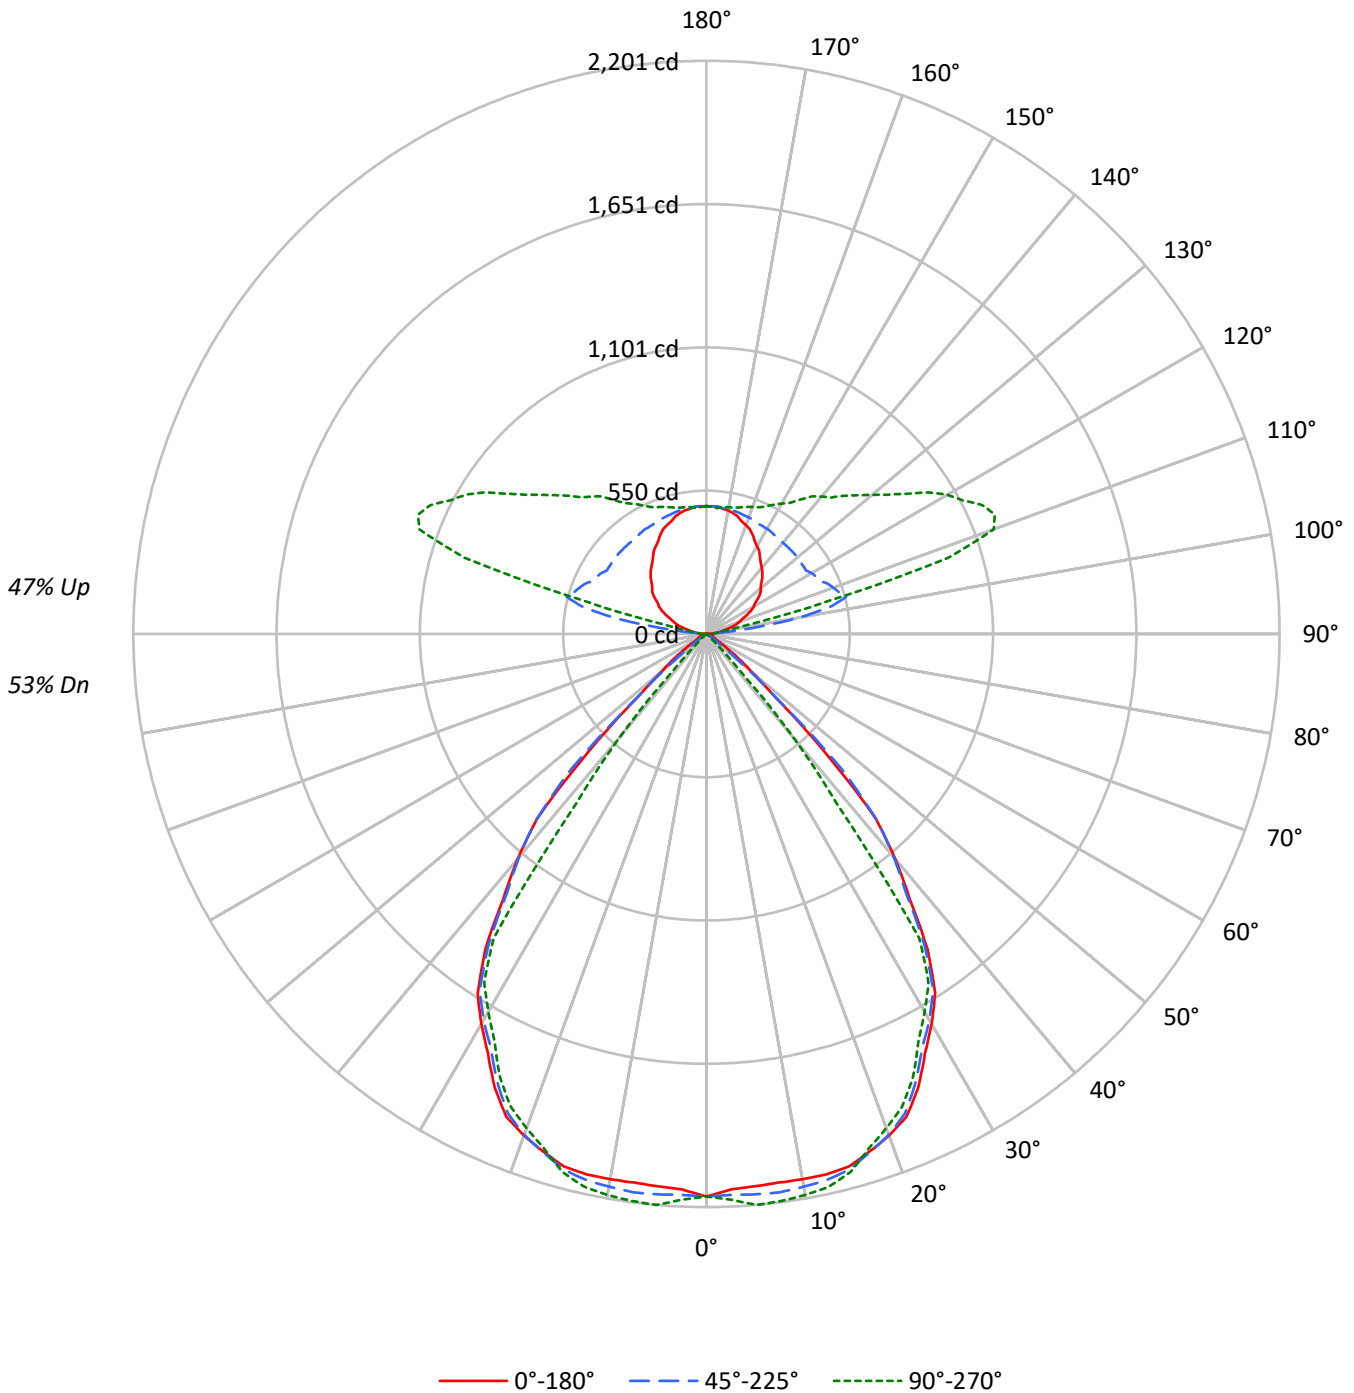



TEST NUMBER: P622026

CATALOG NUMBER: VLT-WB-M-075U-075D-940-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	53				
1	101	97	94	91	93	90	88	85	78	76	74	66	65	64	55	55	54	49				
2	94	88	83	78	87	82	78	74	71	68	65	61	59	57	52	50	49	45				
3	87	79	73	68	81	74	69	65	65	61	58	56	53	51	48	46	45	41				
4	81	72	65	60	75	68	62	57	59	55	52	52	49	46	45	43	41	38				
5	75	65	59	53	70	62	56	51	55	50	46	48	44	42	42	39	37	34				
6	70	60	53	48	66	56	50	46	50	45	42	44	41	38	39	36	34	32				
7	66	55	48	43	61	52	46	41	46	41	38	41	37	35	36	33	31	29				
8	61	50	44	39	57	48	42	37	43	38	35	38	34	32	34	31	29	27				
9	58	47	40	35	54	44	38	34	40	35	32	36	32	29	32	29	27	25				
10	54	43	37	32	51	41	35	31	37	32	29	33	30	27	30	27	25	23				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15499	15499	15499
5°	15338	15559	15856
10°	15494	15705	15939
15°	15728	15808	15887
20°	15653	15630	15420
25°	15226	15044	14862
30°	14325	14186	13882
35°	12976	12788	12480
40°	10553	10481	4954
45°	6530	7446	341
50°	2492	1996	204
55°	1224	363	76
60°	593	175	22
65°	545	25	25
70°	514	31	31
75°	507	42	42
80°	504	62	0
85°	502	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 7446 cd/sqm



TEST NUMBER: P622026

CATALOG NUMBER: VLT-WB-M-075U-075D-940-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	206.3	3.7
10°-20°	598.4	10.6
20°-30°	870.0	15.4
30°-40°	865.8	15.4
40°-50°	380.7	6.8
50°-60°	56.2	1.0
60°-70°	12.8	0.2
70°-80°	4.8	0.1
80°-90°	2.2	0.0
90°-100°	60.4	1.1
100°-110°	430.1	7.6
110°-120°	583.9	10.4
120°-130°	475.3	8.4
130°-140°	382.3	6.8
140°-150°	301.4	5.3
150°-160°	220.3	3.9
160°-170°	136.9	2.4
170°-180°	46.7	0.8
0°-30°	1674.7	29.7
0°-40°	2540.5	45.1
0°-60°	2977.4	52.8
0°-90°	2997.2	53.2
90°-120°	1074.4	19.1
90°-150°	2233.3	39.6
90°-180°	2637.0	46.8
0°-180°	5634.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2160	2160	2160	2160	2160	
5°	2129	2167	2160	2165	2201	203
15°	2117	2162	2128	2107	2138	595
25°	1923	1959	1900	1850	1877	879
35°	1481	1477	1460	1429	1425	907
45°	644	732	734	49	34	498
55°	98	105	29	11	6	99
65°	32	28	2	2	2	32
75°	18	3	2	2	2	19
85°	6	0	0	0	0	6
90°	0	3	6	9	9	1
95°	25	46	25	28	34	28
105°	96	147	559	714	472	101
115°	170	206	482	1001	1170	169
125°	244	277	454	794	939	217
135°	303	336	457	654	750	233
145°	358	388	460	570	630	225
155°	420	435	469	516	540	193
165°	466	472	482	494	503	131
175°	491	494	491	488	485	46
180°	491	491	491	491	491	



TEST NUMBER: P622026

CATALOG NUMBER: VLT-WB-M-075U-075D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2159.9	2159.9	2159.9	2159.9	2159.9
2.5°	2135.4	2167.7	2156.2	2155.4	2174.6
5°	2129.3	2166.7	2159.9	2165.3	2201.2
7.5°	2125.0	2162.7	2162.6	2160.1	2196.0
10°	2126.3	2165.1	2155.3	2151.5	2187.4
12.5°	2126.3	2167.5	2146.8	2136.9	2174.0
15°	2117.1	2161.9	2127.8	2107.1	2138.5
17.5°	2084.1	2132.8	2085.9	2045.5	2071.9
20°	2049.8	2102.2	2046.8	1995.4	2019.3
22.5°	2007.0	2053.4	1993.0	1939.1	1964.2
25°	1923.0	1958.8	1900.0	1850.2	1877.1
27.5°	1816.9	1836.6	1792.7	1744.8	1762.2
30°	1728.8	1743.8	1712.0	1666.4	1675.3
32.5°	1634.7	1644.8	1619.1	1579.5	1587.3
35°	1481.2	1476.7	1459.8	1429.1	1424.6
37.5°	1280.7	1272.9	1262.0	1143.4	819.9
40°	1126.6	1129.6	1118.9	699.3	528.9
42.5°	963.9	982.5	967.3	476.1	173.0
45°	643.5	731.7	733.7	48.6	33.6
47.5°	347.9	443.9	361.1	30.1	24.5
50°	223.2	278.5	178.8	22.8	18.3
52.5°	159.6	186.2	70.0	17.9	13.5
55°	97.8	105.3	29.0	10.6	6.1
57.5°	58.4	69.5	18.3	3.9	1.5
60°	41.3	48.7	12.2	1.5	1.5
62.5°	36.4	36.7	8.6	1.5	1.5
65°	32.1	27.6	1.5	1.5	1.5
67.5°	28.1	20.1	1.5	1.5	1.5
70°	24.5	14.0	1.5	1.5	1.5
72.5°	22.0	9.2	1.5	1.5	1.5
75°	18.3	3.4	1.5	1.5	1.5
77.5°	14.7	1.8	1.5	1.2	1.2
80°	12.2	1.8	1.5	0.0	0.0
82.5°	9.8	1.7	0.3	0.0	0.0
85°	6.1	0.1	0.0	0.0	0.0
87.5°	2.4	0.7	1.2	1.9	1.9
90°	0.0	3.0	6.2	9.3	9.3
92.5°	7.4	10.4	13.6	19.2	21.6
95°	24.7	45.8	24.7	27.9	34.0
97.5°	43.8	87.9	181.6	53.6	46.3
100°	58.7	110.0	364.3	107.2	71.0
102.5°	73.5	127.2	492.8	283.0	155.0
105°	95.7	147.0	558.9	713.9	472.4
107.5°	117.9	156.6	533.5	1039.0	973.2
110°	132.8	169.0	518.7	1091.8	1173.3



TEST NUMBER: P622026

CATALOG NUMBER: VLT-WB-M-075U-075D-940-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	147.6	183.8	503.9	1060.9	<i>1198.0</i>
115°	169.8	206.0	481.7	1001.2	<i>1170.2</i>
117.5°	192.7	228.3	476.1	936.4	<i>1110.3</i>
120°	210.0	243.2	466.2	887.2	<i>1068.3</i>
122.5°	222.3	257.9	453.9	844.9	<i>1011.5</i>
125°	243.9	277.1	453.9	793.7	<i>938.6</i>
127.5°	261.8	295.6	454.5	734.4	<i>877.5</i>
130°	271.7	307.9	457.0	694.7	<i>830.6</i>
132.5°	284.1	320.3	457.0	676.9	<i>788.6</i>
135°	302.6	335.8	457.0	653.7	<i>750.3</i>
137.5°	318.0	353.7	457.0	628.1	<i>710.8</i>
140°	330.4	363.6	457.0	613.1	<i>688.5</i>
142.5°	342.7	373.5	459.4	595.7	<i>666.3</i>
145°	358.2	388.4	460.1	569.5	<i>629.9</i>
147.5°	376.7	403.3	463.8	550.7	<i>597.2</i>
150°	389.0	413.2	466.2	538.1	<i>577.4</i>
152.5°	401.4	423.1	466.2	528.1	<i>560.1</i>
155°	419.9	435.0	469.3	516.2	<i>540.3</i>
157.5°	434.7	449.2	473.0	508.6	<i>526.1</i>
160°	444.6	456.7	475.5	503.6	<i>518.7</i>
162.5°	452.0	464.1	478.0	501.0	<i>511.3</i>
165°	466.2	472.3	481.7	494.2	<i>503.3</i>
167.5°	474.3	479.7	484.8	491.1	<i>496.5</i>
170°	481.7	484.7	484.8	491.0	<i>494.0</i>
172.5°	484.1	489.6	487.2	488.5	<i>491.6</i>
175°	490.9	494.0	490.9	487.8	<i>484.8</i>
177.5°	490.9	493.4	490.9	490.9	<i>488.5</i>
180°	490.9	490.9	490.9	490.9	<i>490.9</i>



TEST NUMBER: P622026

CATALOG NUMBER: VLT-WB-M-075U-075D-940-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	1.79	2.49	2.76	3.45	4.69	0.00	0.00	0.00	0.00	0.00
	3H	2.23	2.85	3.21	3.82	5.08	0.00	0.00	0.00	0.00	0.00
	4H	2.39	2.97	3.38	3.94	5.22	0.00	0.00	0.00	0.00	0.00
	6H	2.57	3.11	3.57	4.08	5.36	0.00	0.00	0.00	0.00	0.00
	8H	2.65	3.16	3.66	4.15	5.43	0.00	0.00	0.00	0.00	0.00
	12H	2.72	3.20	3.73	4.18	5.48	0.00	0.00	0.00	0.00	0.00
4H	2H	1.49	2.07	2.49	3.04	4.31	0.00	0.00	0.00	0.00	0.00
	3H	1.96	2.45	2.97	3.44	4.73	0.00	0.00	0.00	0.00	0.00
	4H	2.13	2.58	3.14	3.57	4.88	0.00	0.00	0.00	0.00	0.00
	6H	2.37	2.74	3.39	3.76	5.06	0.00	0.00	0.00	0.00	0.00
	8H	2.48	2.83	3.51	3.84	5.16	0.00	0.00	0.00	0.00	0.00
	12H	2.59	2.90	3.63	3.93	5.25	0.00	0.00	0.00	0.00	0.00
8H	4H	1.96	2.31	2.98	3.32	4.64	0.00	0.00	0.00	0.00	0.00
	6H	2.20	2.48	3.24	3.53	4.85	0.00	0.00	0.00	0.00	0.00
	8H	2.33	2.58	3.38	3.62	4.95	0.00	0.00	0.00	0.00	0.00
	12H	2.47	2.68	3.52	3.71	5.10	0.00	0.00	0.00	0.00	0.00
12H	4H	1.89	2.20	2.93	3.23	4.55	0.00	0.00	0.00	0.00	0.00
	6H	2.14	2.39	3.19	3.42	4.76	0.00	0.00	0.00	0.00	0.00
	8H	2.27	2.48	3.32	3.51	4.90	0.00	0.00	0.00	0.00	0.00