

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P621414

Luminaire Tested: VLT-F-025U-050D-940-UNV-STD-W-4

Issue Date: 9/2/2020

**Test Information**

Test Method: LM-79-2019  
Report Number: P621414  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2203-563-1)  
Test Lab: INNOVATION CENTER  
Issue Date: 9/2/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: VLT-F-025U-050D-940-UNV-STD-W-4  
Description: CORELITE VAULT SUSPENDED LED LUMINAIRE  
FROSTED LENS  
DOWNLIGHT 500 LUMENS PER FOOT  
UPLIGHT 250 LUMENS PER FOOT  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2774.4 lumens  
Efficiency: N/A  
Efficacy: 122.2 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.12 / 1.23  
Luminous Opening: Rectangular (W 0.38' x L: 4' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 22.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P621414  
CATALOG NUMBER: VLT-F-025U-050D-940-UNV-STD-W-4

### Luminous Intensity Polar Plot

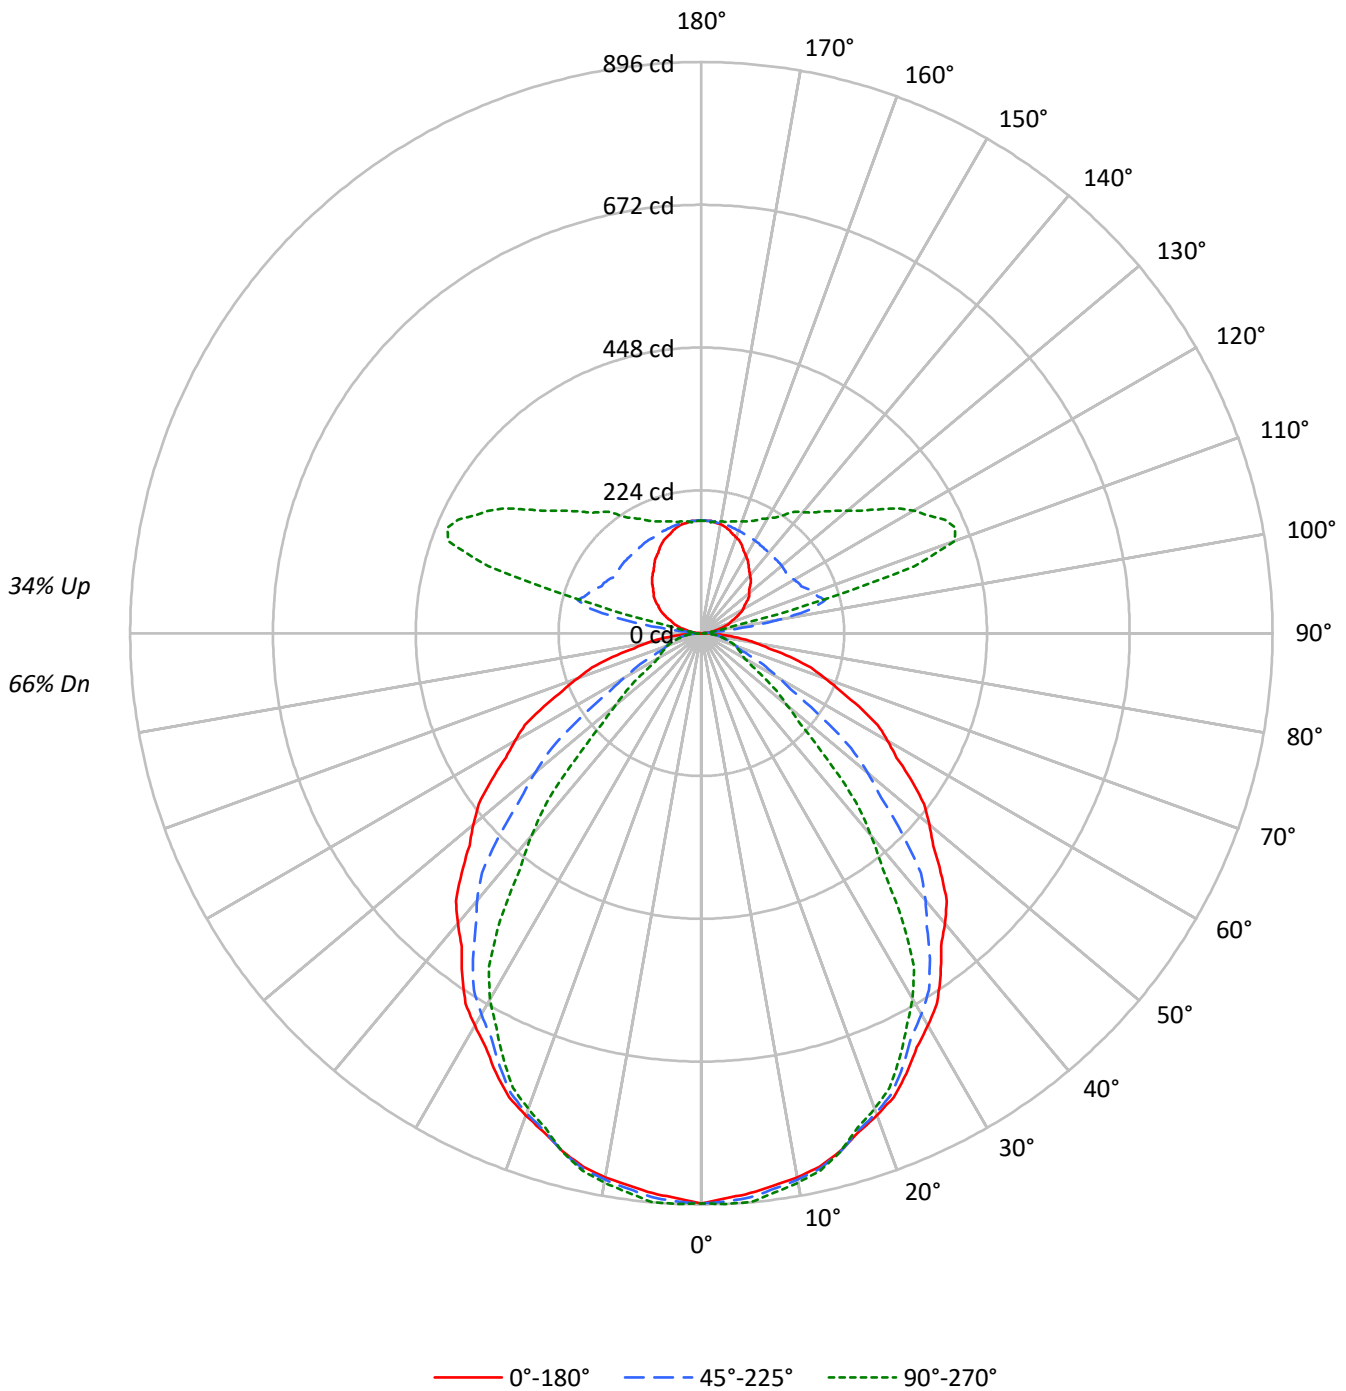



TEST NUMBER: P621414

CATALOG NUMBER: VLT-F-025U-050D-940-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71	66				
1	102	98	95	91	96	93	89	87	82	80	78	73	71	69	64	63	61	57				
2	94	87	81	76	88	82	77	73	73	69	66	65	62	59	57	55	53	49				
3	86	77	70	65	81	73	67	62	65	61	57	58	55	51	52	49	46	43				
4	79	69	61	56	75	66	59	53	59	53	49	53	48	45	47	44	41	38				
5	73	62	54	48	69	59	52	47	53	47	43	48	43	40	43	39	36	33				
6	68	56	48	43	64	53	46	41	48	42	38	44	39	35	39	35	32	30				
7	63	51	43	38	59	49	42	37	44	38	34	40	35	32	36	32	29	27				
8	59	47	39	34	55	45	38	33	41	35	31	37	32	28	33	29	26	24				
9	55	43	35	30	52	41	34	30	37	32	28	34	29	26	31	27	24	22				
10	51	40	32	28	49	38	31	27	35	29	25	32	27	24	29	25	22	20				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6420	6420	6420
5°	6351	6397	6451
10°	6317	6344	6377
15°	6248	6255	6255
20°	6147	6119	6063
25°	6029	5927	5824
30°	5889	5721	5490
35°	5732	5473	4817
40°	5566	5125	3878
45°	5393	4539	2814
50°	5210	3797	1950
55°	5029	2890	1456
60°	4841	2002	1101
65°	4629	1428	1129
70°	4324	1202	1164
75°	3998	1231	1178
80°	3475	1298	1223
85°	2816	1449	1219

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5393 cd/sqm



TEST NUMBER: P621414

CATALOG NUMBER: VLT-F-025U-050D-940-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	84.3	3.0
10°-20°	237.1	8.5
20°-30°	344.8	12.4
30°-40°	381.5	13.7
40°-50°	327.5	11.8
50°-60°	226.8	8.2
60°-70°	135.1	4.9
70°-80°	66.6	2.4
80°-90°	21.0	0.8
90°-100°	21.7	0.8
100°-110°	154.9	5.6
110°-120°	210.3	7.6
120°-130°	171.2	6.2
130°-140°	137.7	5.0
140°-150°	108.5	3.9
150°-160°	79.4	2.9
160°-170°	49.3	1.8
170°-180°	16.8	0.6
0°-30°	666.2	24.0
0°-40°	1047.6	37.8
0°-60°	1601.9	57.7
0°-90°	1824.6	65.8
90°-120°	386.9	13.9
90°-150°	804.3	29.0
90°-180°	950.0	34.2
0°-180°	2774.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	895	895	895	895	895	
5°	882	895	888	887	896	84
15°	841	852	842	837	842	237
25°	762	767	749	736	736	350
35°	654	652	625	574	550	409
45°	531	522	447	323	277	410
55°	402	385	231	133	116	359
65°	273	219	84	67	66	270
75°	144	63	44	43	42	152
85°	34	17	18	16	15	40
90°	0	1	2	3	3	2
95°	9	16	9	10	12	10
105°	34	53	201	257	170	36
115°	61	74	174	360	421	61
125°	88	100	164	286	338	78
135°	109	121	165	235	270	84
145°	129	140	166	205	227	81
155°	151	157	169	186	195	69
165°	168	170	174	178	181	47
175°	177	178	177	176	175	17
180°	177	177	177	177	177	

TEST NUMBER: P621414

CATALOG NUMBER: VLT-F-025U-050D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	894.6	894.6	894.6	894.6	894.6
2.5°	887.2	897.3	892.4	892.5	896.1
5°	881.7	895.2	888.1	887.4	895.5
7.5°	873.5	886.0	878.7	877.8	884.8
10°	866.9	878.6	870.6	868.9	875.2
12.5°	857.3	869.0	860.2	857.0	863.4
15°	841.0	851.8	841.9	837.4	841.9
17.5°	820.5	829.5	818.3	811.1	813.8
20°	805.0	814.0	801.3	791.2	793.9
22.5°	787.9	795.5	781.3	769.7	771.7
25°	761.5	766.9	748.6	735.6	735.6
27.5°	732.1	735.4	714.0	700.4	696.6
30°	710.7	712.5	690.4	674.4	662.6
32.5°	688.5	689.6	664.5	638.7	620.5
35°	654.3	652.5	624.7	574.3	549.9
37.5°	617.9	613.9	581.1	504.3	468.0
40°	594.2	588.8	547.1	454.7	414.0
42.5°	569.8	562.3	509.4	403.6	358.6
45°	531.4	522.4	447.3	323.3	277.3
47.5°	493.3	481.4	383.7	250.5	210.9
50°	466.7	454.1	340.1	206.3	174.7
52.5°	440.1	427.4	295.7	173.2	148.1
55°	402.0	384.8	231.0	132.7	116.4
57.5°	363.2	338.6	172.1	103.4	90.8
60°	337.3	304.8	139.5	85.7	76.7
62.5°	312.2	271.0	114.4	74.8	73.0
65°	272.6	219.3	84.1	67.4	66.5
67.5°	234.9	167.3	62.5	60.8	59.9
70°	206.1	132.0	57.3	56.4	55.5
72.5°	180.2	101.1	52.1	51.2	50.3
75°	144.2	62.8	44.4	43.4	42.5
77.5°	107.8	39.6	36.6	35.7	34.7
80°	84.1	32.6	31.4	30.5	29.6
82.5°	63.4	26.3	25.5	24.6	23.7
85°	34.2	17.0	17.6	15.7	14.8
87.5°	11.8	8.4	8.6	7.3	6.6
90°	0.0	1.1	2.2	3.3	3.3
92.5°	2.7	3.8	4.9	6.9	7.8
95°	8.9	16.5	8.9	10.1	12.2
97.5°	15.8	31.7	65.4	19.3	16.7
100°	21.1	39.6	131.2	38.6	25.6
102.5°	26.5	45.8	177.5	101.9	55.8
105°	34.5	53.0	201.3	257.1	170.1
107.5°	42.5	56.4	192.1	374.2	350.5
110°	47.8	60.9	186.8	393.2	422.5



TEST NUMBER: P621414

CATALOG NUMBER: VLT-F-025U-050D-940-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	53.2	66.2	181.5	382.1	431.4
115°	61.2	74.2	173.5	360.5	421.4
117.5°	69.4	82.2	171.5	337.2	399.9
120°	75.6	87.6	167.9	319.5	384.7
122.5°	80.1	92.9	163.5	304.3	364.3
125°	87.8	99.8	163.5	285.8	338.0
127.5°	94.3	106.5	163.7	264.5	316.0
130°	97.8	110.9	164.6	250.2	299.1
132.5°	102.3	115.3	164.6	243.8	284.0
135°	109.0	120.9	164.6	235.4	270.2
137.5°	114.5	127.4	164.6	226.2	256.0
140°	119.0	130.9	164.6	220.8	248.0
142.5°	123.4	134.5	165.5	214.5	240.0
145°	129.0	139.9	165.7	205.1	226.8
147.5°	135.7	145.2	167.0	198.3	215.0
150°	140.1	148.8	167.9	193.8	207.9
152.5°	144.6	152.4	167.9	190.2	201.7
155°	151.2	156.7	169.0	185.9	194.6
157.5°	156.6	161.8	170.3	183.2	189.5
160°	160.1	164.5	171.2	181.4	186.8
162.5°	162.8	167.1	172.1	180.4	184.1
165°	167.9	170.1	173.5	178.0	181.2
167.5°	170.8	172.7	174.6	176.8	178.8
170°	173.5	174.5	174.6	176.8	177.9
172.5°	174.4	176.3	175.5	175.9	177.0
175°	176.8	177.9	176.8	175.7	174.6
177.5°	176.8	177.7	176.8	176.8	175.9
180°	176.8	176.8	176.8	176.8	176.8

-----



TEST NUMBER: P621414

CATALOG NUMBER: VLT-F-025U-050D-940-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.45	16.40	16.27	17.24	18.27	7.68	8.63	8.50	9.47	10.50
	3H	16.95	17.80	17.78	18.64	19.70	9.04	9.89	9.88	10.74	11.80
	4H	17.47	18.27	18.32	19.12	20.19	9.70	10.50	10.55	11.35	12.43
	6H	17.87	18.61	18.73	19.47	20.55	10.30	11.03	11.16	11.89	12.98
	8H	18.00	18.70	18.88	19.58	20.66	10.52	11.22	11.40	12.10	13.18
	12H	18.09	18.75	18.96	19.62	20.73	10.69	11.36	11.57	12.23	13.34
4H	2H	15.29	16.09	16.15	16.94	18.01	8.31	9.11	9.17	9.96	11.03
	3H	16.94	17.60	17.80	18.48	19.57	9.87	10.54	10.74	11.42	12.51
	4H	17.53	18.13	18.41	19.01	20.13	10.67	11.27	11.55	12.15	13.27
	6H	18.03	18.55	18.92	19.45	20.57	11.41	11.93	12.31	12.84	13.96
	8H	18.22	18.70	19.11	19.60	20.73	11.71	12.19	12.60	13.09	14.22
	12H	18.35	18.78	19.26	19.70	20.84	11.93	12.37	12.84	13.29	14.42
8H	4H	17.45	17.94	18.35	18.84	19.96	11.13	11.62	12.03	12.52	13.64
	6H	17.99	18.39	18.91	19.33	20.46	12.02	12.42	12.94	13.36	14.49
	8H	18.23	18.58	19.16	19.51	20.66	12.41	12.77	13.34	13.70	14.85
	12H	18.42	18.73	19.35	19.66	20.85	12.74	13.05	13.67	13.97	15.17
12H	4H	17.41	17.84	18.32	18.76	19.89	11.18	11.62	12.10	12.54	13.67
	6H	17.96	18.32	18.89	19.25	20.40	12.13	12.49	13.06	13.42	14.57
	8H	18.21	18.52	19.14	19.45	20.64	12.58	12.89	13.51	13.82	15.01