

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P489109

Luminaire Tested: **CLM-24-2-INS-A19156-LD4-3HI-27-120-EDD**

Issue Date: 3/11/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P489109
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2101-115-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/11/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: CLM-24-2-INS-A19156-LD4-3HI-27-120-EDD
Description: 2X2 CLM LED LUMINAIRE WITH A19156 LENS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6784.5 lumens
Efficiency: N/A
Efficacy: 104.7 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.21 / 1.34
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')
CIE Type: Direct

Input Watts (W): 64.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P489109

CATALOG NUMBER: CLM-24-2-INS-A19156-LD4-3HI-27-120-EDD

Luminous Intensity Polar Plot

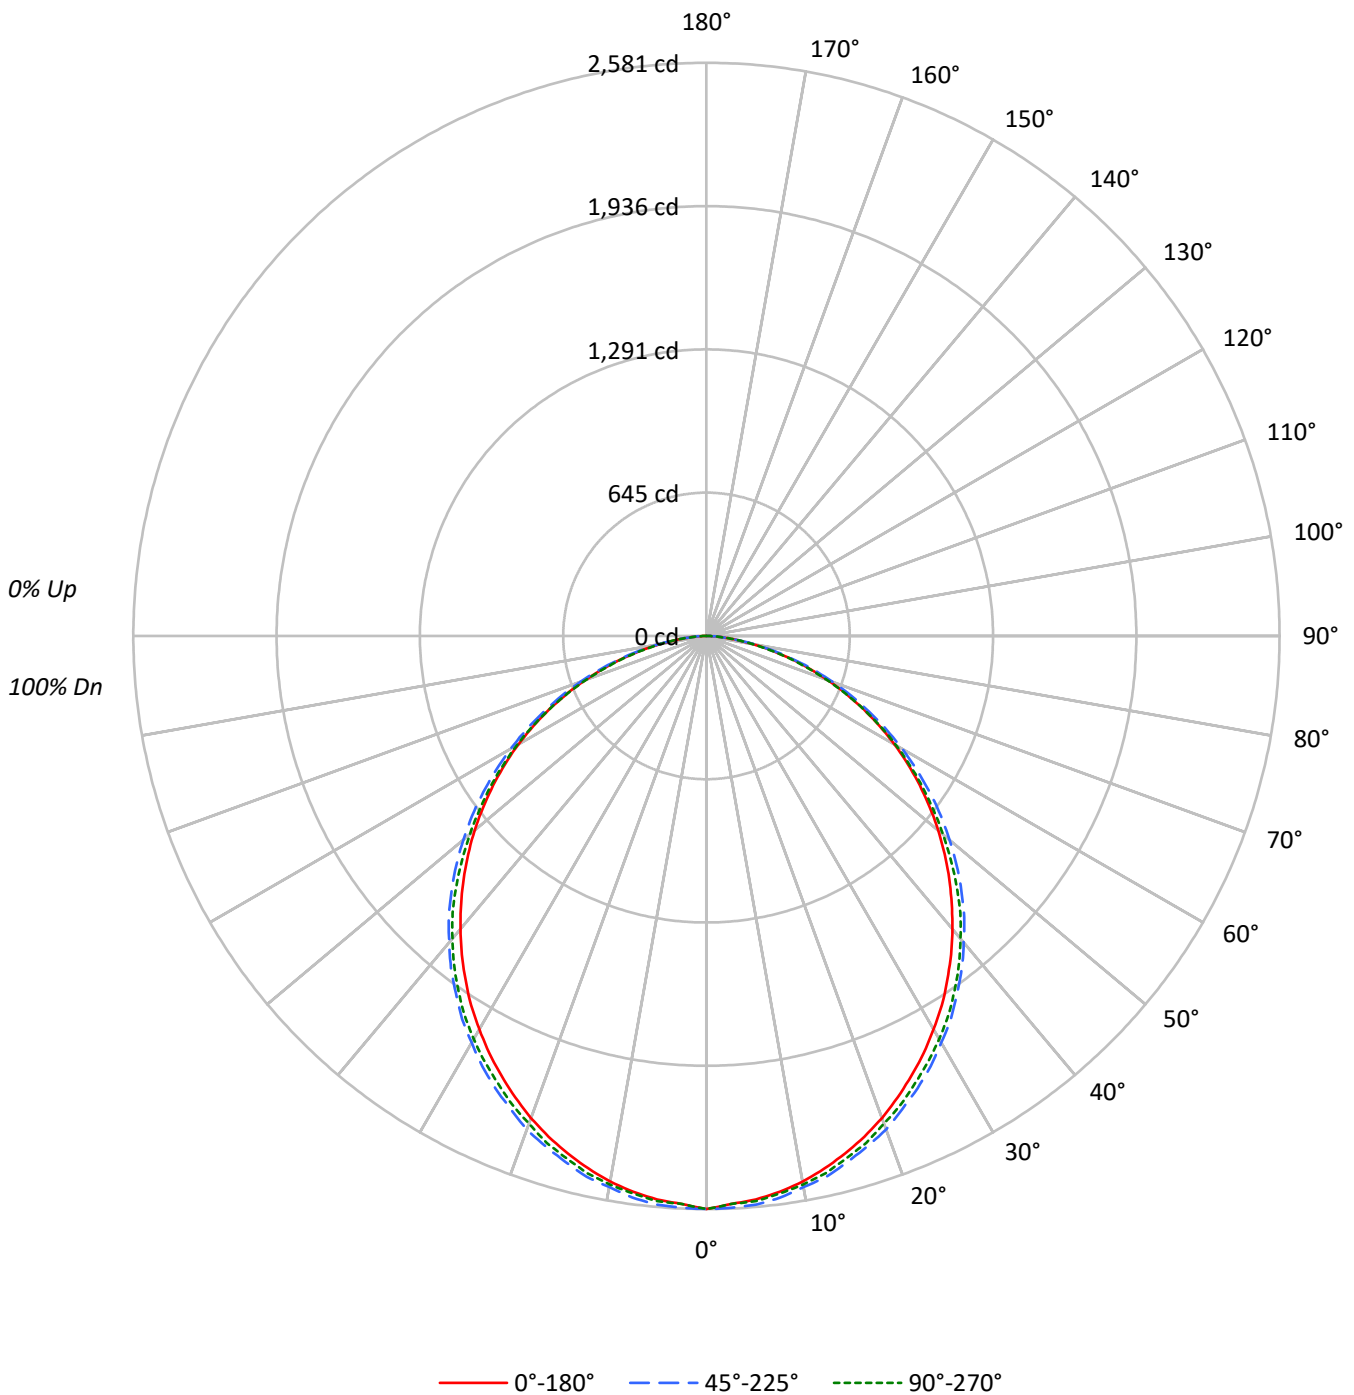



TEST NUMBER: P489109

CATALOG NUMBER: CLM-24-2-INS-A19156-LD4-3HI-27-120-EDD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	109	105	100	97	106	102	98	95	98	95	92	94	92	89	91	88	87	85					85			
2	99	91	85	79	97	90	83	78	86	81	76	83	78	75	80	76	73	71					71			
3	91	80	72	66	88	79	71	65	76	70	64	73	68	63	71	66	62	60					60			
4	83	71	63	56	81	70	62	56	68	61	55	65	59	54	63	58	54	51					51			
5	77	64	55	48	75	63	54	48	61	53	48	59	52	47	57	51	47	45					45			
6	71	58	49	42	69	57	48	42	55	47	42	53	47	41	52	46	41	39					39			
7	66	52	44	38	64	51	43	37	50	43	37	49	42	37	47	41	37	35					35			
8	61	48	39	34	60	47	39	33	46	38	33	45	38	33	43	37	33	31					31			
9	57	44	36	30	56	43	35	30	42	35	30	41	35	30	40	34	30	28					28			
10	54	41	33	27	52	40	32	27	39	32	27	38	32	27	37	31	27	25					25			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6944	6944	6944
5°	6880	6945	6902
10°	6817	6886	6853
15°	6723	6831	6783
20°	6617	6774	6692
25°	6488	6676	6600
30°	6357	6573	6512
35°	6214	6460	6400
40°	6052	6331	6251
45°	5882	6179	6062
50°	5706	5982	5825
55°	5499	5756	5579
60°	5264	5483	5314
65°	4961	5151	4965
70°	4565	4749	4515
75°	4020	4201	3958
80°	3267	3408	3230
85°	2276	2424	2365



TEST NUMBER: P489109

CATALOG NUMBER: CLM-24-2-INS-A19156-LD4-3HI-27-120-EDD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	243.0	3.6
10°-20°	688.7	10.2
20°-30°	1027.2	15.1
30°-40°	1217.2	17.9
40°-50°	1231.7	18.2
50°-60°	1075.7	15.9
60°-70°	786.1	11.6
70°-80°	418.2	6.2
80°-90°	96.7	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1959.0	28.9
0°-40°	3176.2	46.8
0°-60°	5483.5	80.8
0°-90°	6784.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6784.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2581	2581	2581	2581	2581	
5°	2547	2552	2571	2577	2555	242
15°	2413	2429	2452	2467	2435	680
25°	2185	2212	2248	2257	2223	1007
35°	1892	1921	1966	1980	1948	1183
45°	1546	1573	1624	1625	1593	1192
55°	1172	1196	1227	1209	1189	1048
65°	779	795	809	793	780	771
75°	387	396	404	389	381	411
85°	74	75	78	79	77	93
90°	0	0	0	0	0	



TEST NUMBER: P489109

CATALOG NUMBER: CLM-24-2-INS-A19156-LD4-3HI-27-120-EDD

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2580.6	2580.6	2580.6	2580.6	2580.6
2.5°	2560.4	2568.8	2577.4	2581.1	2560.1
5°	2547.0	2551.8	2570.9	2576.8	2555.0
7.5°	2524.9	2532.2	2550.7	2553.4	2532.5
10°	2494.8	2507.7	2520.1	2533.5	2508.0
12.5°	2456.4	2473.8	2494.8	2497.2	2477.9
15°	2413.1	2429.2	2452.1	2466.9	2434.9
17.5°	2364.7	2380.3	2409.9	2412.5	2393.2
20°	2310.6	2330.0	2365.5	2371.7	2337.0
22.5°	2249.3	2275.4	2305.0	2310.9	2285.4
25°	2185.1	2212.0	2248.5	2256.9	2222.7
27.5°	2117.9	2143.7	2184.8	2190.7	2162.0
30°	2045.8	2070.0	2115.2	2125.1	2095.8
32.5°	1972.7	1996.9	2046.9	2055.2	2026.7
35°	1891.5	1921.1	1966.5	1980.2	1948.2
37.5°	1808.7	1837.4	1889.1	1901.4	1867.0
40°	1722.9	1751.4	1802.2	1812.4	1779.4
42.5°	1635.2	1663.7	1718.1	1719.7	1692.2
45°	1545.7	1573.1	1623.7	1625.0	1593.0
47.5°	1454.8	1482.5	1527.7	1522.6	1492.5
50°	1362.9	1389.2	1428.8	1418.5	1391.4
52.5°	1267.7	1293.2	1330.6	1314.0	1288.4
55°	1172.0	1195.7	1226.8	1209.1	1189.2
57.5°	1075.5	1099.4	1123.3	1105.3	1088.1
60°	978.1	999.1	1018.7	1000.5	987.3
62.5°	879.2	897.2	914.1	896.7	884.3
65°	779.2	795.0	809.0	792.9	779.7
67.5°	679.7	693.1	706.0	689.4	675.7
70°	580.2	591.8	603.6	586.4	573.8
72.5°	482.1	492.3	502.8	486.1	475.1
75°	386.6	395.5	404.1	389.3	380.7
77.5°	295.5	303.0	308.9	299.5	291.2
80°	210.8	216.4	219.9	216.2	208.4
82.5°	135.5	139.5	141.4	141.2	136.0
85°	73.7	75.0	78.5	79.3	76.6
87.5°	28.5	30.4	31.2	33.6	30.9
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)