

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P544818

Luminaire Tested: **FMR-12-1-LD4-1LO-40-UNV-93-87-EDD**

Issue Date: 6/15/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P544818  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-135-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 6/15/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FMR-12-1-LD4-1LO-40-UNV-93-87-EDD  
Description: 1X1 FMR TROFFER WITH .156 CLEAR TEMPERED GLASS FIXTURE SIDE AND .375 CLEAR PC ENVIRONMENTAL SIDE LENSES WITH, 90 CRI AND 4000K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.   Condition   Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 478.0 lumens  
Efficiency: N/A  
Efficacy: 82.4 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1 / 1.15  
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P544818

CATALOG NUMBER: FMR-12-1-LD4-1LO-40-UNV-93-87-EDD

### Luminous Intensity Polar Plot

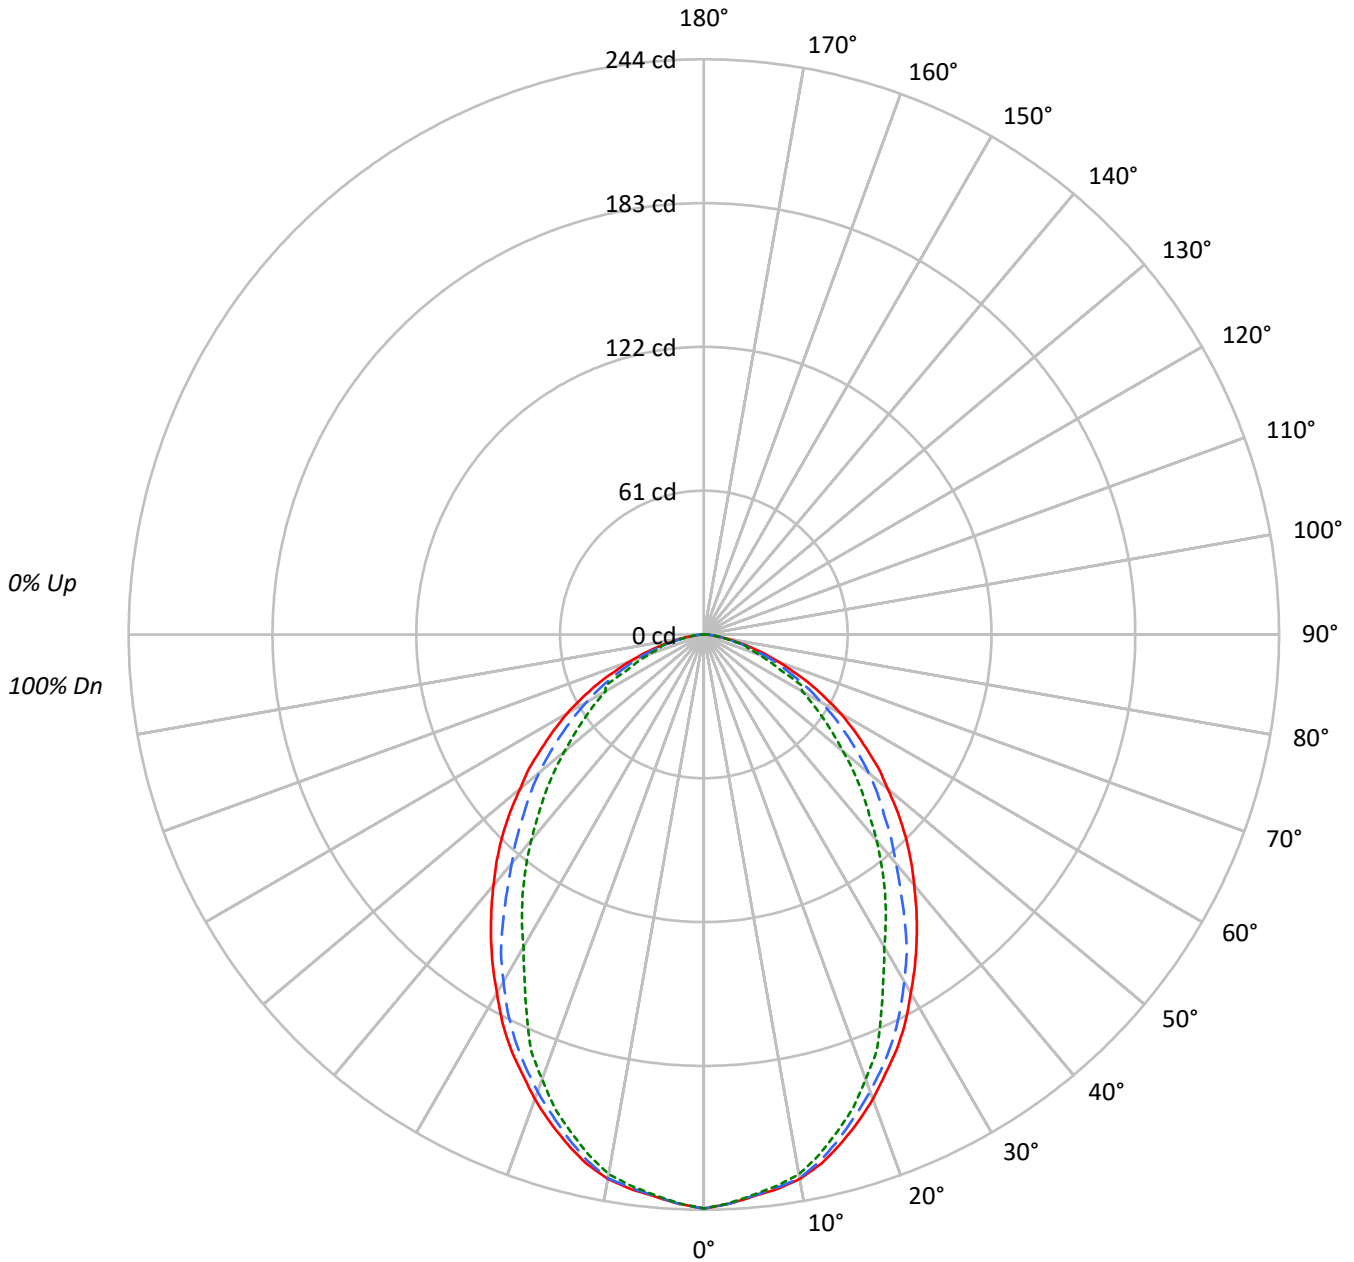



TEST NUMBER: P544818

CATALOG NUMBER: FMR-12-1-LD4-1LO-40-UNV-93-87-EDD

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	106	102	99	108	104	100	97	100	97	94	96	94	91	92	90	89	87																			
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75																			
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65																			
4	86	75	67	61	84	74	66	61	72	65	60	69	64	59	67	62	58	56																			
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50																			
6	74	62	53	48	72	61	53	47	59	52	47	57	51	47	56	50	46	44																			
7	69	56	48	43	67	56	48	42	54	47	42	53	46	42	51	46	42	40																			
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36																			
9	61	48	40	35	59	47	40	35	46	39	35	45	39	34	44	39	34	33																			
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	32	30																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2621	2621	2621
5°	2586	2582	2579
10°	2563	2560	2541
15°	2494	2468	2434
20°	2402	2363	2299
25°	2303	2253	2113
30°	2183	2113	1903
35°	2068	1953	1761
40°	1950	1780	1602
45°	1839	1646	1448
50°	1701	1527	1291
55°	1574	1383	1156
60°	1442	1236	1035
65°	1268	1082	917
70°	1045	947	780
75°	832	728	761
80°	558	521	490
85°	346	420	482



TEST NUMBER: P544818

CATALOG NUMBER: FMR-12-1-LD4-1LO-40-UNV-93-87-EDD

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	22.7	4.7
10°-20°	62.2	13.0
20°-30°	86.1	18.0
30°-40°	91.8	19.2
40°-50°	83.8	17.5
50°-60°	65.6	13.7
60°-70°	42.8	8.9
70°-80°	19.0	4.0
80°-90°	4.1	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	171.0	35.8
0°-40°	262.8	55.0
0°-60°	412.2	86.2
0°-90°	478.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	478.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	244	244	244	244	244	
5°	239	239	239	239	239	23
15°	224	224	222	219	218	63
25°	194	193	190	183	178	89
35°	157	156	149	137	134	98
45°	121	118	108	99	95	93
55°	84	81	74	65	62	75
65°	50	47	42	43	36	49
75°	20	19	18	17	18	21
85°	3	3	3	4	4	4
90°	0	0	0	0	0	



TEST NUMBER: P544818

CATALOG NUMBER: FMR-12-1-LD4-1LO-40-UNV-93-87-EDD

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	243.5	243.5	243.5	243.5	243.5
2.5°	241.8	241.8	241.8	241.5	241.5
5°	239.3	239.0	239.0	238.7	238.7
7.5°	237.3	237.0	236.7	236.4	235.9
10°	234.5	234.5	234.2	232.8	232.5
12.5°	230.0	229.7	228.6	226.6	226.0
15°	223.8	223.8	221.5	219.3	218.4
17.5°	217.0	216.7	213.9	211.7	210.6
20°	209.7	209.1	206.3	202.7	200.7
22.5°	201.5	201.5	198.2	193.4	191.4
25°	193.9	192.8	189.7	183.0	177.9
27.5°	185.2	183.5	180.2	170.6	164.7
30°	175.6	174.8	170.0	157.6	153.1
32.5°	166.6	165.2	160.2	147.2	143.6
35°	157.4	156.2	148.6	137.4	134.0
37.5°	148.1	146.7	137.1	128.1	123.9
40°	138.8	137.1	126.7	118.5	114.0
42.5°	130.0	127.8	117.7	108.9	103.9
45°	120.8	118.2	108.1	99.1	95.1
47.5°	111.5	109.2	99.9	90.6	86.1
50°	101.6	99.6	91.2	81.9	77.1
52.5°	93.5	90.4	82.2	72.9	69.0
55°	83.9	81.3	73.7	65.0	61.6
57.5°	75.2	72.6	65.6	57.4	54.6
60°	67.0	63.3	57.4	50.4	48.1
62.5°	58.0	55.2	50.1	44.2	47.0
65°	49.8	47.0	42.5	43.3	36.0
67.5°	40.8	39.4	35.5	31.5	30.4
70°	33.2	31.5	30.1	25.9	24.8
72.5°	26.5	24.8	22.8	20.5	19.7
75°	20.0	18.6	17.5	16.6	18.3
77.5°	13.8	13.2	12.4	11.5	11.3
80°	9.0	8.7	8.4	8.2	7.9
82.5°	5.3	5.3	5.3	5.3	5.3
85°	2.8	3.1	3.4	3.7	3.9
87.5°	1.7	1.7	2.0	2.3	2.5
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°    - - 45°-225°    - - - - 90°-270°







(END OF REPORT)