

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P545067

Luminaire Tested: **FMR-12-1-LD4-2LO-35-UNV-82-88-EDD**

Issue Date: 6/15/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P545067
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-135-5)
Test Lab: INNOVATION CENTER
Issue Date: 6/15/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FMR-12-1-LD4-2LO-35-UNV-82-88-EDD
Description: 1X1 FMR TROFFER WITH .187 CLEAR PC FIXTURE SIDE AND .500 CLEAR PC ENVIRONMENTAL SIDE LENSES WITH, 90 CRI AND 3500K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 787.0 lumens
Efficiency: N/A
Efficacy: 67.3 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1 / 1.15
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P545067

CATALOG NUMBER: FMR-12-1-LD4-2LO-35-UNV-82-88-EDD

Luminous Intensity Polar Plot

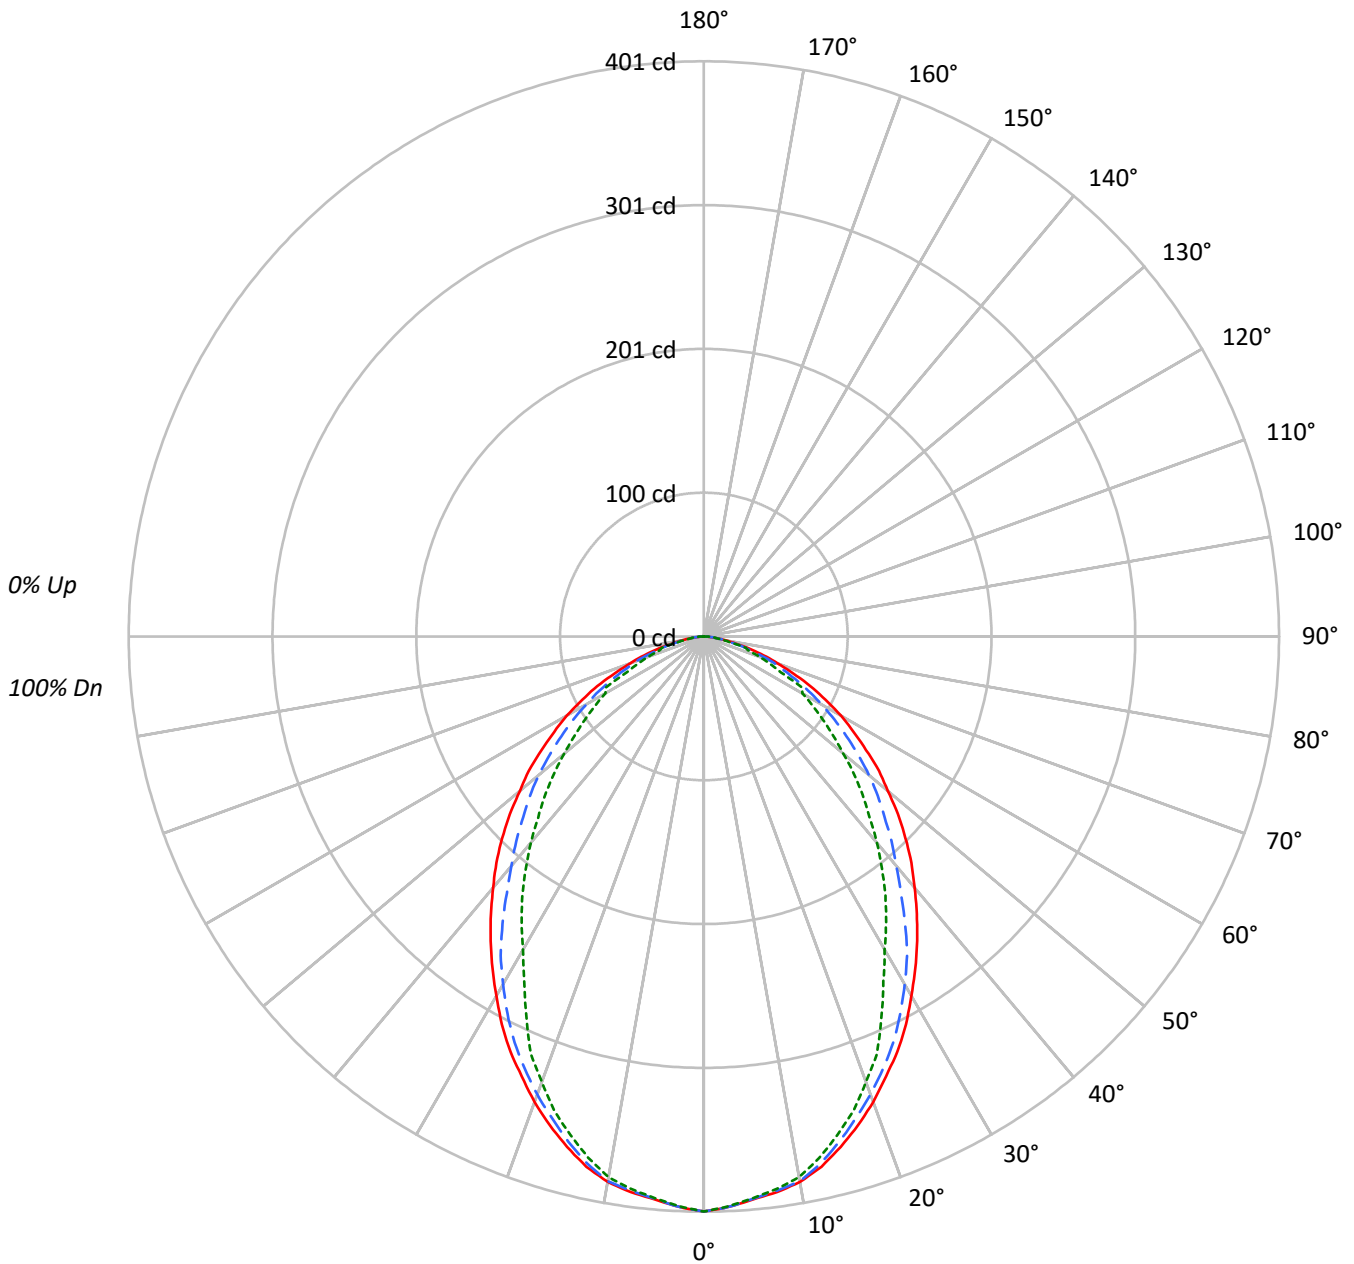



TEST NUMBER: P545067

CATALOG NUMBER: FMR-12-1-LD4-2LO-35-UNV-82-88-EDD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	106	102	99	108	104	100	97	100	97	94	96	94	91	92	90	89	87																			
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75																			
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65																			
4	86	75	67	61	84	74	66	61	72	65	60	69	64	59	67	62	58	56																			
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50																			
6	74	62	53	48	72	61	53	47	59	52	47	57	51	47	56	50	46	44																			
7	69	56	48	43	67	56	48	42	54	47	42	53	46	42	51	46	42	40																			
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36																			
9	61	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	33																			
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	32	30																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4315	4315	4315
5°	4256	4252	4246
10°	4220	4215	4184
15°	4105	4064	4007
20°	3955	3891	3785
25°	3792	3710	3479
30°	3594	3479	3133
35°	3405	3215	2899
40°	3211	2931	2637
45°	3026	2710	2384
50°	2802	2515	2127
55°	2592	2278	1905
60°	2375	2034	1707
65°	2089	1783	1510
70°	1721	1561	1284
75°	1368	1194	1252
80°	917	862	806
85°	568	692	803



TEST NUMBER: P545067

CATALOG NUMBER: FMR-12-1-LD4-2LO-35-UNV-82-88-EDD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.3	4.7
10°-20°	102.4	13.0
20°-30°	141.8	18.0
30°-40°	151.2	19.2
40°-50°	137.9	17.5
50°-60°	108.1	13.7
60°-70°	70.4	8.9
70°-80°	31.2	4.0
80°-90°	6.7	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	281.5	35.8
0°-40°	432.7	55.0
0°-60°	678.7	86.2
0°-90°	787.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	787.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	401	401	401	401	401	
5°	394	394	394	393	393	37
15°	368	368	365	361	360	104
25°	319	318	312	301	293	147
35°	259	257	245	226	221	162
45°	199	195	178	163	157	153
55°	138	134	121	107	102	124
65°	82	77	70	71	59	81
75°	33	31	29	27	30	35
85°	5	5	6	6	6	6
90°	0	0	0	0	0	



TEST NUMBER: P545067

CATALOG NUMBER: FMR-12-1-LD4-2LO-35-UNV-82-88-EDD

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	400.9	400.9	400.9	400.9	400.9
2.5°	398.1	398.1	398.1	397.6	397.6
5°	393.9	393.5	393.5	393.0	393.0
7.5°	390.7	390.2	389.8	389.3	388.4
10°	386.1	386.1	385.6	383.3	382.8
12.5°	378.6	378.2	376.3	373.1	372.2
15°	368.4	368.4	364.7	361.0	359.6
17.5°	357.3	356.9	352.2	348.5	346.7
20°	345.3	344.3	339.7	333.7	330.4
22.5°	331.8	331.8	326.3	318.4	315.1
25°	319.3	317.5	312.4	301.2	292.9
27.5°	305.0	302.2	296.6	280.9	271.1
30°	289.2	287.8	279.9	259.5	252.1
32.5°	274.4	272.0	263.7	242.4	236.4
35°	259.1	257.2	244.7	226.2	220.6
37.5°	243.8	241.5	225.7	210.9	203.9
40°	228.5	225.7	208.6	195.1	187.7
42.5°	214.1	210.4	193.7	179.4	171.0
45°	198.8	194.7	178.0	163.1	156.6
47.5°	183.5	179.8	164.5	149.2	141.8
50°	167.3	164.1	150.2	134.9	127.0
52.5°	153.9	148.8	135.3	120.0	113.5
55°	138.1	133.9	121.4	107.1	101.5
57.5°	123.7	119.6	108.0	94.5	89.9
60°	110.3	104.3	94.5	83.0	79.3
62.5°	95.5	90.8	82.5	72.8	77.4
65°	82.0	77.4	70.0	71.4	59.3
67.5°	67.2	64.9	58.4	51.9	50.1
70°	54.7	51.9	49.6	42.6	40.8
72.5°	43.6	40.8	37.5	33.8	32.4
75°	32.9	30.6	28.7	27.3	30.1
77.5°	22.7	21.8	20.4	19.0	18.5
80°	14.8	14.4	13.9	13.4	13.0
82.5°	8.8	8.8	8.8	8.8	8.8
85°	4.6	5.1	5.6	6.0	6.5
87.5°	2.8	2.8	3.2	3.7	4.2
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)