

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P546616

Luminaire Tested: **FMR-24-4-LD4-1STD-40-UNV-80-85-EDD**

Issue Date: 6/15/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P546616
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-135-5)
Test Lab: INNOVATION CENTER
Issue Date: 6/15/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FMR-24-4-LD4-1STD-40-UNV-80-85-EDD
Description: 2X4 FMR TROFFER WITH .125 PRISMATIC ACRYLIC FIXTURE SIDE AND .187 CLEAR PC ENVIRONMENTAL SIDE LENSES WITH, 90 CRI AND 4000K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3309.0 lumens
Efficiency: N/A
Efficacy: 99.4 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1 / 1.15
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 33.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P546616

CATALOG NUMBER: FMR-24-4-LD4-1STD-40-UNV-80-85-EDD

Luminous Intensity Polar Plot

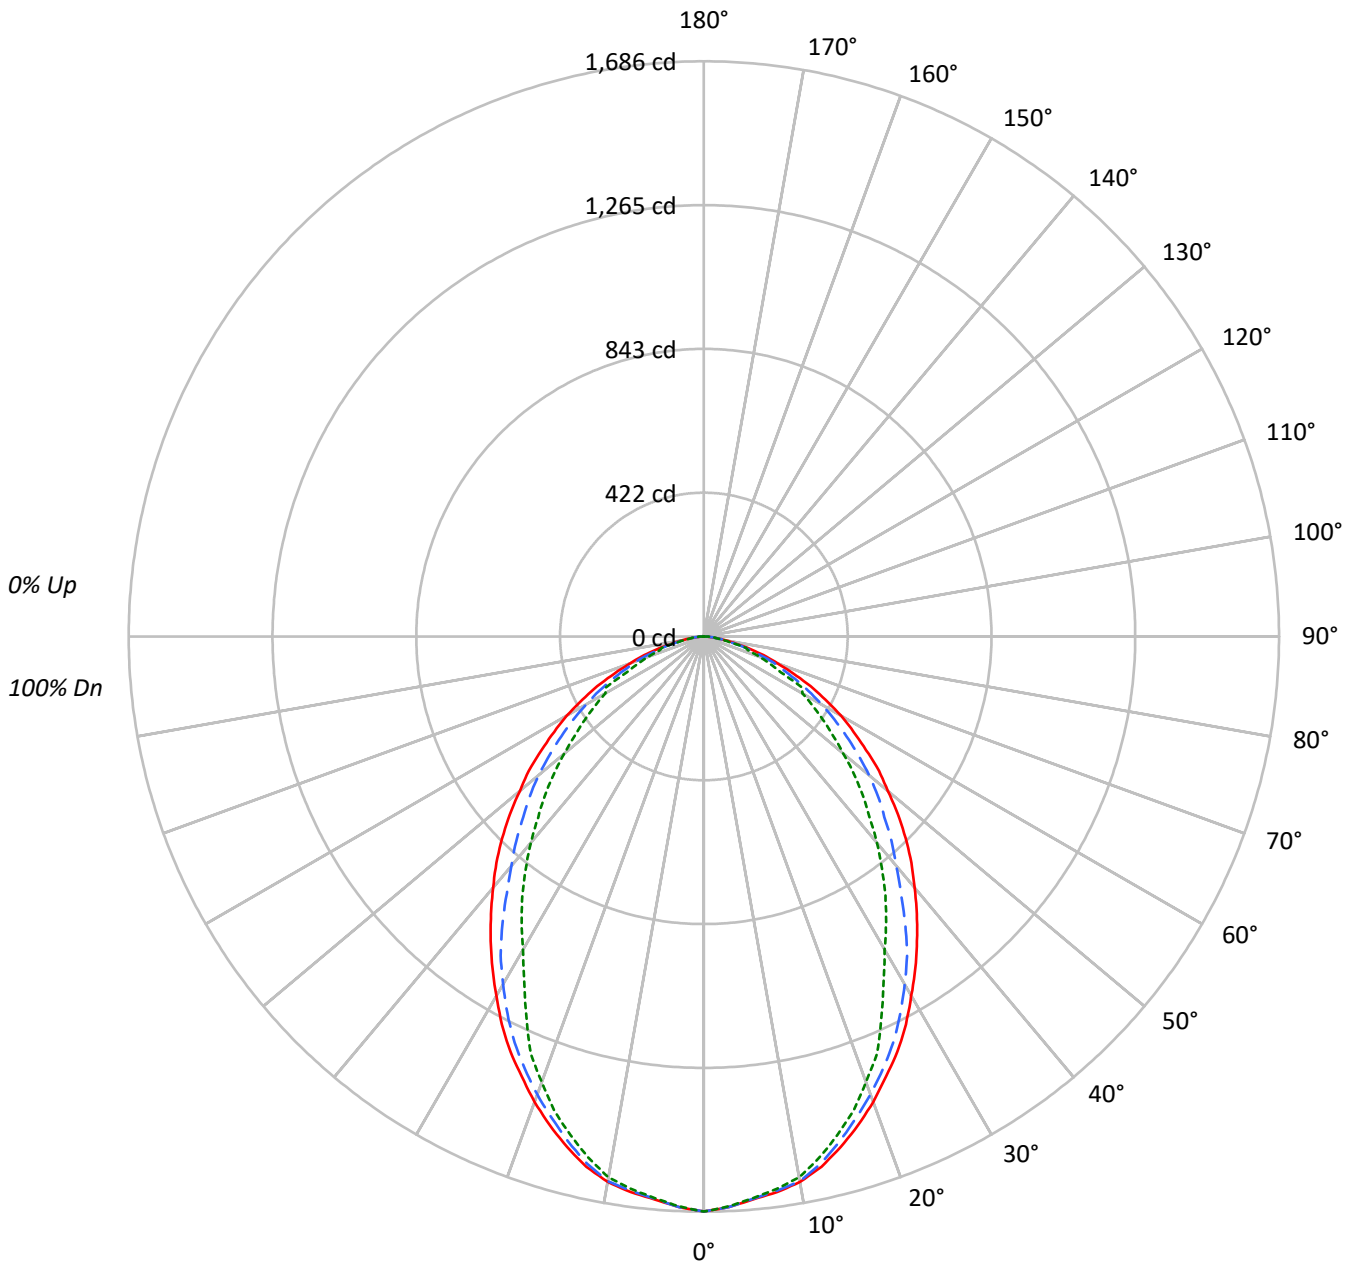



TEST NUMBER: P546616

CATALOG NUMBER: FMR-24-4-LD4-1STD-40-UNV-80-85-EDD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	106	102	99	108	104	100	97	100	97	94	96	94	91	92	90	89	87																			
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75																			
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65																			
4	86	75	67	61	84	74	66	61	72	65	60	69	64	59	67	62	58	56																			
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50																			
6	74	62	53	48	72	61	53	47	59	52	47	57	51	47	56	50	46	44																			
7	69	56	48	43	67	56	48	42	54	47	42	53	46	42	51	46	42	40																			
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36																			
9	61	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	33																			
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	32	30																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2268	2268	2268
5°	2237	2234	2232
10°	2218	2215	2199
15°	2158	2136	2106
20°	2079	2045	1989
25°	1993	1950	1828
30°	1889	1829	1647
35°	1789	1690	1523
40°	1687	1540	1386
45°	1591	1424	1253
50°	1473	1322	1118
55°	1362	1198	1001
60°	1248	1070	897
65°	1098	937	794
70°	904	820	675
75°	719	628	659
80°	483	453	423
85°	301	361	421



TEST NUMBER: P546616

CATALOG NUMBER: FMR-24-4-LD4-1STD-40-UNV-80-85-EDD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.9	4.7
10°-20°	430.6	13.0
20°-30°	596.1	18.0
30°-40°	635.7	19.2
40°-50°	579.9	17.5
50°-60°	454.3	13.7
60°-70°	296.1	8.9
70°-80°	131.2	4.0
80°-90°	28.2	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1183.7	35.8
0°-40°	1819.3	55.0
0°-60°	2853.5	86.2
0°-90°	3309.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3309.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1686	1686	1686	1686	1686	
5°	1656	1654	1654	1652	1652	157
15°	1549	1549	1534	1518	1512	436
25°	1343	1335	1313	1267	1232	616
35°	1089	1082	1029	951	928	681
45°	836	818	748	686	659	644
55°	581	563	510	450	427	521
65°	345	325	294	300	249	340
75°	138	129	121	115	127	148
85°	20	21	23	25	27	27
90°	0	0	0	0	0	



TEST NUMBER: P546616

CATALOG NUMBER: FMR-24-4-LD4-1STD-40-UNV-80-85-EDD

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1685.6	1685.6	1685.6	1685.6	1685.6
2.5°	1673.9	1673.9	1673.9	1671.9	1671.9
5°	1656.3	1654.4	1654.4	1652.4	1652.4
7.5°	1642.7	1640.7	1638.8	1636.8	1632.9
10°	1623.2	1623.2	1621.3	1611.5	1609.6
12.5°	1592.0	1590.1	1582.3	1568.6	1564.7
15°	1549.2	1549.2	1533.6	1518.0	1512.1
17.5°	1502.4	1500.4	1481.0	1465.4	1457.6
20°	1451.7	1447.8	1428.3	1403.0	1389.4
22.5°	1395.2	1395.2	1371.8	1338.7	1325.1
25°	1342.6	1334.8	1313.4	1266.6	1231.5
27.5°	1282.2	1270.5	1247.1	1180.9	1139.9
30°	1215.9	1210.1	1177.0	1091.2	1060.1
32.5°	1153.6	1143.8	1108.8	1019.1	993.8
35°	1089.3	1081.5	1028.9	950.9	927.5
37.5°	1025.0	1015.2	949.0	886.6	857.4
40°	960.7	949.0	876.9	820.4	789.2
42.5°	900.3	884.7	814.5	754.1	719.0
45°	836.0	818.4	748.3	685.9	658.6
47.5°	771.7	756.1	691.8	627.5	596.3
50°	703.5	689.8	631.4	567.0	533.9
52.5°	646.9	625.5	569.0	504.7	477.4
55°	580.7	563.2	510.5	450.1	426.7
57.5°	520.3	502.7	454.0	397.5	378.0
60°	463.8	438.4	397.5	348.8	333.2
62.5°	401.4	381.9	346.9	305.9	325.4
65°	344.9	325.4	294.2	300.1	249.4
67.5°	282.6	272.8	245.5	218.2	210.5
70°	229.9	218.2	208.5	179.3	171.5
72.5°	183.2	171.5	157.8	142.2	136.4
75°	138.4	128.6	120.8	115.0	126.7
77.5°	95.5	91.6	85.7	79.9	77.9
80°	62.4	60.4	58.5	56.5	54.6
82.5°	37.0	37.0	37.0	37.0	37.0
85°	19.5	21.4	23.4	25.3	27.3
87.5°	11.7	11.7	13.6	15.6	17.5
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)