

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P546617

Luminaire Tested: **FMR-24-4-LD4-1STD-40-UNV-80-86-EDD**

Issue Date: 6/15/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P546617
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-135-5)
Test Lab: INNOVATION CENTER
Issue Date: 6/15/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FMR-24-4-LD4-1STD-40-UNV-80-86-EDD
Description: 2X4 FMR TROFFER WITH .125 PRISMATIC ACRYLIC FIXTURE SIDE AND .250 CLEAR PC ENVIRONMENTAL SIDE LENSES WITH, 90 CRI AND 4000K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3272.0 lumens
Efficiency: N/A
Efficacy: 98.3 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1 / 1.15
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 33.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P546617

CATALOG NUMBER: FMR-24-4-LD4-1STD-40-UNV-80-86-EDD

Luminous Intensity Polar Plot

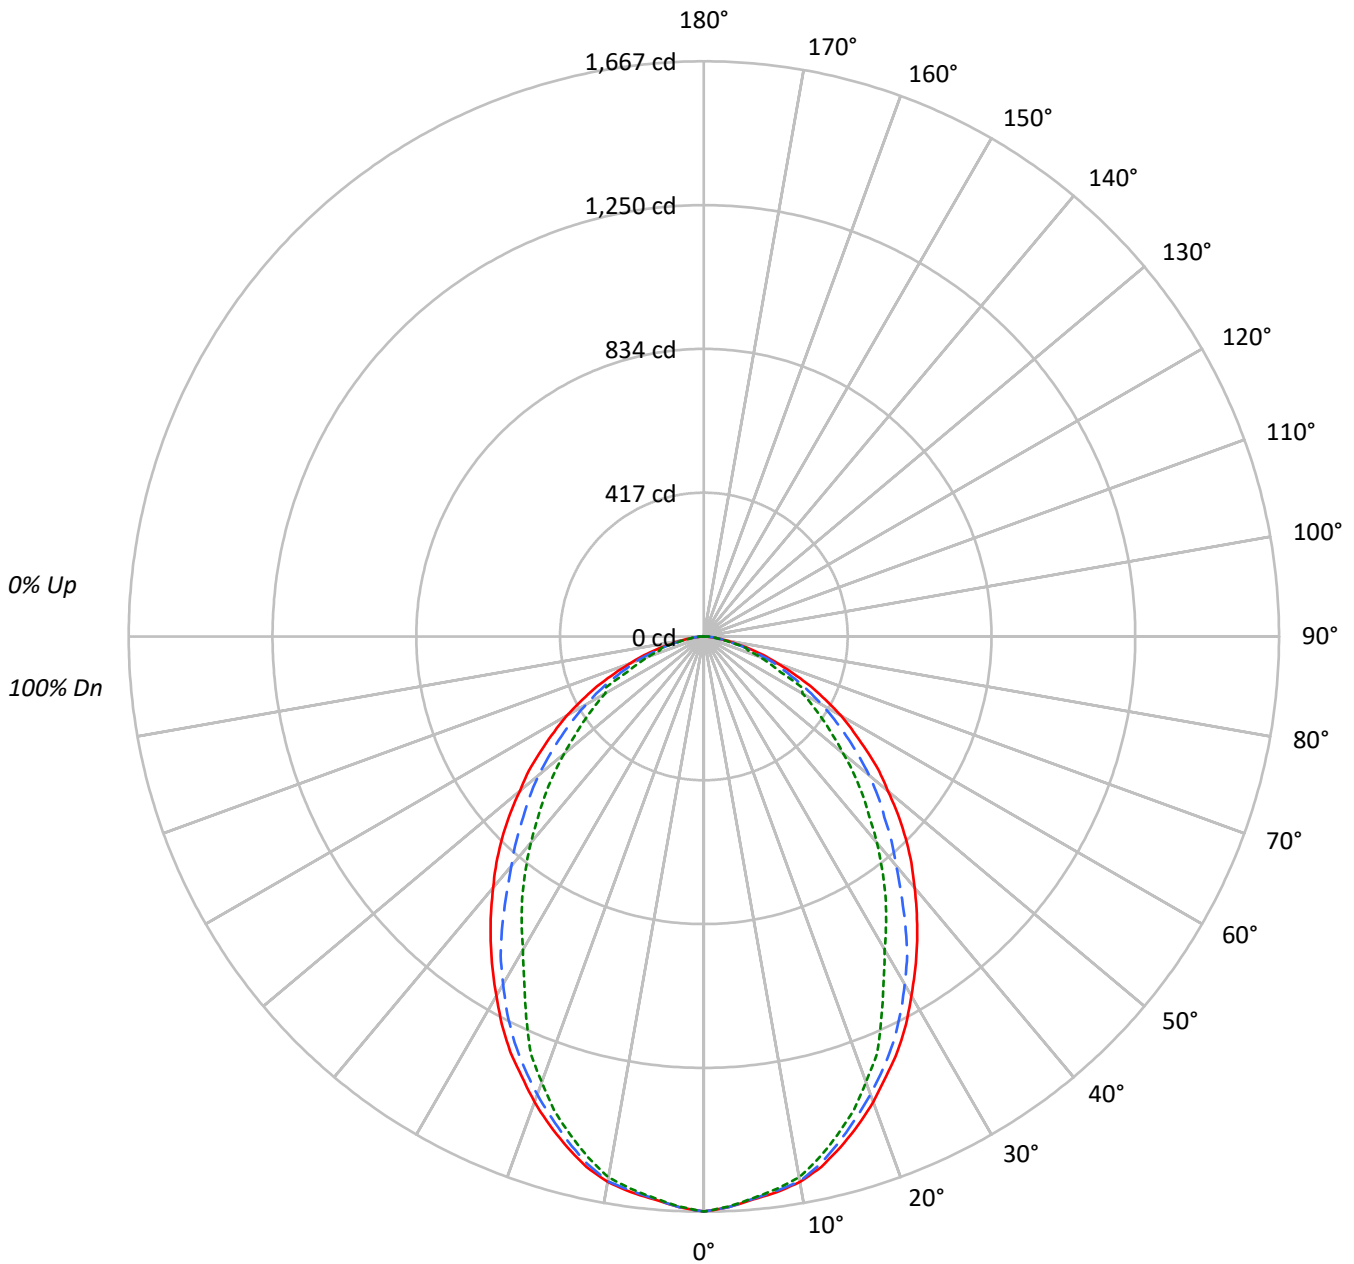



TEST NUMBER: P546617

CATALOG NUMBER: FMR-24-4-LD4-1STD-40-UNV-80-86-EDD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	106	102	99	108	104	100	97	100	97	94	96	94	91	92	90	89	87																			
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75																			
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65																			
4	86	75	67	61	84	74	66	61	72	65	60	69	64	59	67	62	58	56																			
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50																			
6	74	62	53	48	72	61	53	47	59	52	47	57	51	47	56	50	46	44																			
7	69	56	48	43	67	56	48	42	54	47	42	53	46	42	51	46	42	40																			
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36																			
9	61	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	33																			
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	32	30																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2243	2243	2243
5°	2212	2209	2207
10°	2193	2190	2175
15°	2134	2112	2083
20°	2055	2022	1967
25°	1971	1928	1808
30°	1868	1808	1629
35°	1769	1671	1507
40°	1668	1523	1371
45°	1573	1408	1239
50°	1456	1307	1105
55°	1347	1184	990
60°	1234	1058	887
65°	1086	926	785
70°	895	811	667
75°	711	621	651
80°	478	448	418
85°	298	357	417



TEST NUMBER: P546617

CATALOG NUMBER: FMR-24-4-LD4-1STD-40-UNV-80-86-EDD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	155.1	4.7
10°-20°	425.8	13.0
20°-30°	589.5	18.0
30°-40°	628.6	19.2
40°-50°	573.4	17.5
50°-60°	449.2	13.7
60°-70°	292.8	8.9
70°-80°	129.7	4.0
80°-90°	27.8	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1170.4	35.8
0°-40°	1799.0	55.0
0°-60°	2821.7	86.2
0°-90°	3272.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3272.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1667	1667	1667	1667	1667	
5°	1638	1636	1636	1634	1634	155
15°	1532	1532	1516	1501	1495	431
25°	1328	1320	1299	1252	1218	609
35°	1077	1069	1017	940	917	673
45°	827	809	740	678	651	637
55°	574	557	505	445	422	515
65°	341	322	291	297	247	336
75°	137	127	120	114	125	147
85°	19	21	23	25	27	27
90°	0	0	0	0	0	



TEST NUMBER: P546617

CATALOG NUMBER: FMR-24-4-LD4-1STD-40-UNV-80-86-EDD

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1666.7	1666.7	1666.7	1666.7	1666.7
2.5°	1655.2	1655.2	1655.2	1653.2	1653.2
5°	1637.8	1635.9	1635.9	1634.0	1634.0
7.5°	1624.3	1622.4	1620.5	1618.5	1614.7
10°	1605.1	1605.1	1603.1	1593.5	1591.6
12.5°	1574.2	1572.3	1564.6	1551.1	1547.2
15°	1531.8	1531.8	1516.4	1501.0	1495.2
17.5°	1485.6	1483.7	1464.4	1449.0	1441.3
20°	1435.5	1431.6	1412.4	1387.3	1373.8
22.5°	1379.6	1379.6	1356.5	1323.7	1310.2
25°	1327.6	1319.9	1298.7	1252.4	1217.8
27.5°	1267.9	1256.3	1233.2	1167.7	1127.2
30°	1202.3	1196.6	1163.8	1079.0	1048.2
32.5°	1140.7	1131.1	1096.4	1007.7	982.7
35°	1077.1	1069.4	1017.4	940.3	917.2
37.5°	1013.5	1003.9	938.4	876.7	847.8
40°	949.9	938.4	867.1	811.2	780.4
42.5°	890.2	874.8	805.4	745.7	711.0
45°	826.6	809.3	739.9	678.2	651.3
47.5°	763.0	747.6	684.0	620.4	589.6
50°	695.6	682.1	624.3	560.7	528.0
52.5°	639.7	618.5	562.6	499.1	472.1
55°	574.2	556.9	504.8	445.1	422.0
57.5°	514.5	497.1	449.0	393.1	373.8
60°	458.6	433.5	393.1	344.9	329.5
62.5°	396.9	377.7	343.0	302.5	321.8
65°	341.0	321.8	291.0	296.7	246.6
67.5°	279.4	269.8	242.8	215.8	208.1
70°	227.4	215.8	206.2	177.3	169.6
72.5°	181.1	169.6	156.1	140.7	134.9
75°	136.8	127.2	119.5	113.7	125.2
77.5°	94.4	90.6	84.8	79.0	77.1
80°	61.7	59.7	57.8	55.9	54.0
82.5°	36.6	36.6	36.6	36.6	36.6
85°	19.3	21.2	23.1	25.0	27.0
87.5°	11.6	11.6	13.5	15.4	17.3
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)