

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P547090

Luminaire Tested: **FMR-24-4-LD4-3LO-35-UNV-93-87-EDD**

Issue Date: 6/15/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P547090  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-135-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 6/15/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FMR-24-4-LD4-3LO-35-UNV-93-87-EDD  
Description: 2X4 FMR TROFFER WITH .156 CLEAR TEMPERED GLASS FIXTURE SIDE AND .375 CLEAR PC ENVIRONMENTAL SIDE LENSES WITH, 90 CRI AND 3500K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.   Condition   Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7007.0 lumens  
Efficiency: N/A  
Efficacy: 99.8 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1 / 1.15  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct

Input Watts (W): 70.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P547090

CATALOG NUMBER: FMR-24-4-LD4-3LO-35-UNV-93-87-EDD

### Luminous Intensity Polar Plot

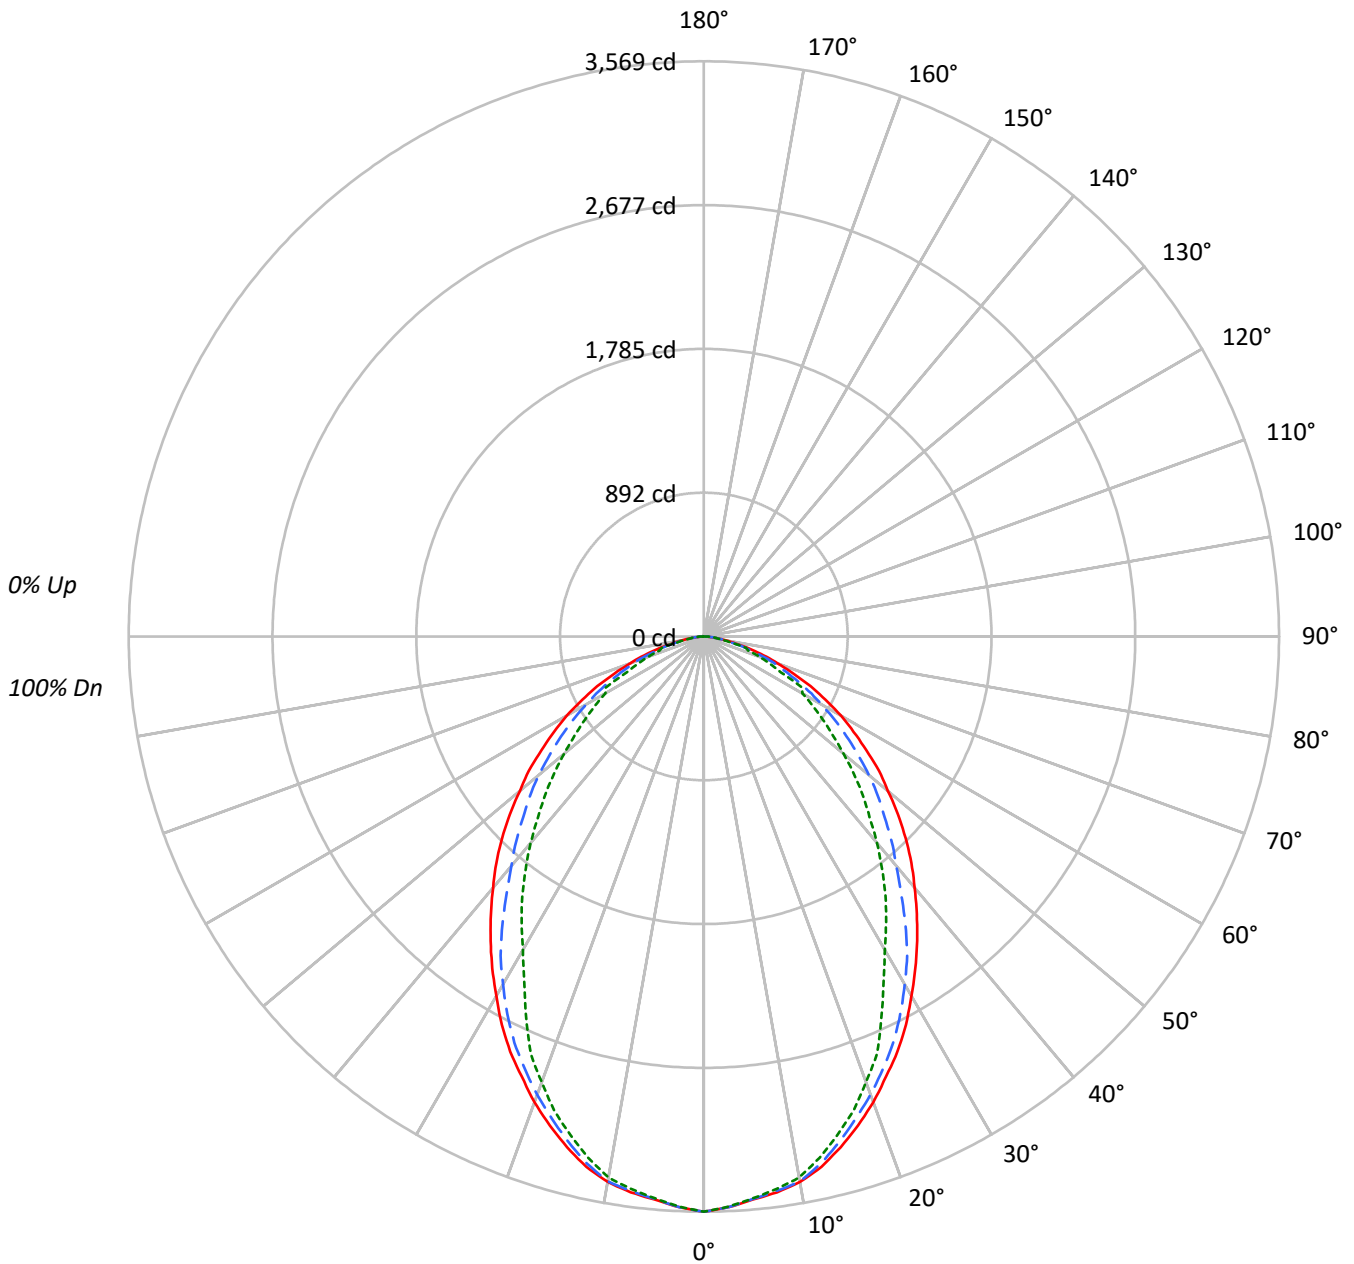



TEST NUMBER: P547090

CATALOG NUMBER: FMR-24-4-LD4-3LO-35-UNV-93-87-EDD

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	106	102	99	108	104	100	97	100	97	94	96	94	91	92	90	89	87																			
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75																			
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65																			
4	86	75	67	61	84	74	66	61	72	65	60	69	64	59	67	62	58	56																			
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50																			
6	74	62	53	48	72	61	53	47	59	52	47	57	51	47	56	50	46	44																			
7	69	56	48	43	67	56	48	42	54	47	42	53	46	42	51	46	42	40																			
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36																			
9	61	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	33																			
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	32	30																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4802	4802	4802
5°	4737	4732	4726
10°	4696	4690	4657
15°	4569	4523	4460
20°	4402	4331	4213
25°	4221	4129	3871
30°	4000	3872	3487
35°	3789	3579	3226
40°	3573	3261	2935
45°	3368	3015	2654
50°	3118	2798	2367
55°	2884	2536	2120
60°	2643	2265	1899
65°	2325	1984	1682
70°	1915	1737	1428
75°	1523	1330	1394
80°	1023	959	895
85°	638	764	892



TEST NUMBER: P547090

CATALOG NUMBER: FMR-24-4-LD4-3LO-35-UNV-93-87-EDD

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	332.3	4.7
10°-20°	911.8	13.0
20°-30°	1262.4	18.0
30°-40°	1346.1	19.2
40°-50°	1228.0	17.5
50°-60°	962.0	13.7
60°-70°	627.0	8.9
70°-80°	277.8	4.0
80°-90°	59.6	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2506.5	35.8
0°-40°	3852.5	55.0
0°-60°	6042.6	86.2
0°-90°	7007.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7007.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3569	3569	3569	3569	3569	
5°	3507	3503	3503	3499	3499	333
15°	3280	3280	3247	3214	3202	922
25°	2843	2826	2781	2682	2608	1305
35°	2307	2290	2179	2014	1964	1442
45°	1770	1733	1584	1452	1395	1364
55°	1230	1192	1081	953	904	1103
65°	730	689	623	636	528	720
75°	293	272	256	244	268	314
85°	41	45	50	54	58	57
90°	0	0	0	0	0	



TEST NUMBER: P547090

CATALOG NUMBER: FMR-24-4-LD4-3LO-35-UNV-93-87-EDD

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3569.3	3569.3	3569.3	3569.3	3569.3
2.5°	3544.5	3544.5	3544.5	3540.4	3540.4
5°	3507.4	3503.3	3503.3	3499.1	3499.1
7.5°	3478.5	3474.4	3470.2	3466.1	3457.9
10°	3437.2	3437.2	3433.1	3412.5	3408.3
12.5°	3371.2	3367.1	3350.6	3321.7	3313.4
15°	3280.4	3280.4	3247.4	3214.4	3202.0
17.5°	3181.4	3177.3	3136.0	3103.0	3086.5
20°	3074.1	3065.9	3024.6	2971.0	2942.1
22.5°	2954.4	2954.4	2904.9	2834.8	2805.9
25°	2843.0	2826.5	2781.1	2682.1	2607.8
27.5°	2715.1	2690.4	2640.8	2500.6	2413.9
30°	2574.8	2562.4	2492.3	2310.7	2244.7
32.5°	2442.8	2422.2	2347.9	2158.1	2104.4
35°	2306.6	2290.1	2178.7	2013.6	1964.1
37.5°	2170.4	2149.8	2009.5	1877.5	1815.6
40°	2034.3	2009.5	1856.8	1737.2	1671.2
42.5°	1906.4	1873.4	1724.8	1596.9	1522.6
45°	1770.2	1733.1	1584.5	1452.5	1394.7
47.5°	1634.0	1601.0	1464.8	1328.7	1262.7
50°	1489.6	1460.7	1336.9	1200.8	1130.6
52.5°	1369.9	1324.6	1204.9	1068.7	1010.9
55°	1229.6	1192.5	1081.1	953.2	903.7
57.5°	1101.7	1064.6	961.4	841.8	800.5
60°	982.1	928.4	841.8	738.6	705.6
62.5°	850.0	808.8	734.5	647.8	689.1
65°	730.4	689.1	623.1	635.5	528.2
67.5°	598.3	577.7	519.9	462.1	445.6
70°	486.9	462.1	441.5	379.6	363.1
72.5°	387.9	363.1	334.2	301.2	288.8
75°	293.0	272.3	255.8	243.5	268.2
77.5°	202.2	193.9	181.6	169.2	165.1
80°	132.0	127.9	123.8	119.7	115.5
82.5°	78.4	78.4	78.4	78.4	78.4
85°	41.3	45.4	49.5	53.6	57.8
87.5°	24.8	24.8	28.9	33.0	37.1
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°    - - 45°-225°    - - - - 90°-270°







(END OF REPORT)