

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: FAIL-SAFE

Report Number: P559489

Luminaire Tested: FSR-12-1-LD4-2STD-40-UNV-81-84-EDD

Issue Date: 7/20/2021

Test Information

Test Method: LM-79-2019
Report Number: P559489
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-135-5)
Test Lab: INNOVATION CENTER
Issue Date: 7/20/2021
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: FAIL-SAFE
Catalog Number: FSR-12-1-LD4-2STD-40-UNV-81-84-EDD
Description: 1X1 FSR TROFFER WITH .156 CLEAR PC FIXTURE SIDE AND .125 CLEAR PC ENVIRONMENTAL SI
LENSES WITH, 80 CRI AND 4000K CCT LEDS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1510.0 lumens
Efficiency: N/A
Efficacy: 91.0 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1 / 1.15
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
CIE Type: Direct


Input Watts (W): 16.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P559489

CATALOG NUMBER: FSR-12-1-LD4-2STD-40-UNV-81-84-EDD

Luminous Intensity Polar Plot

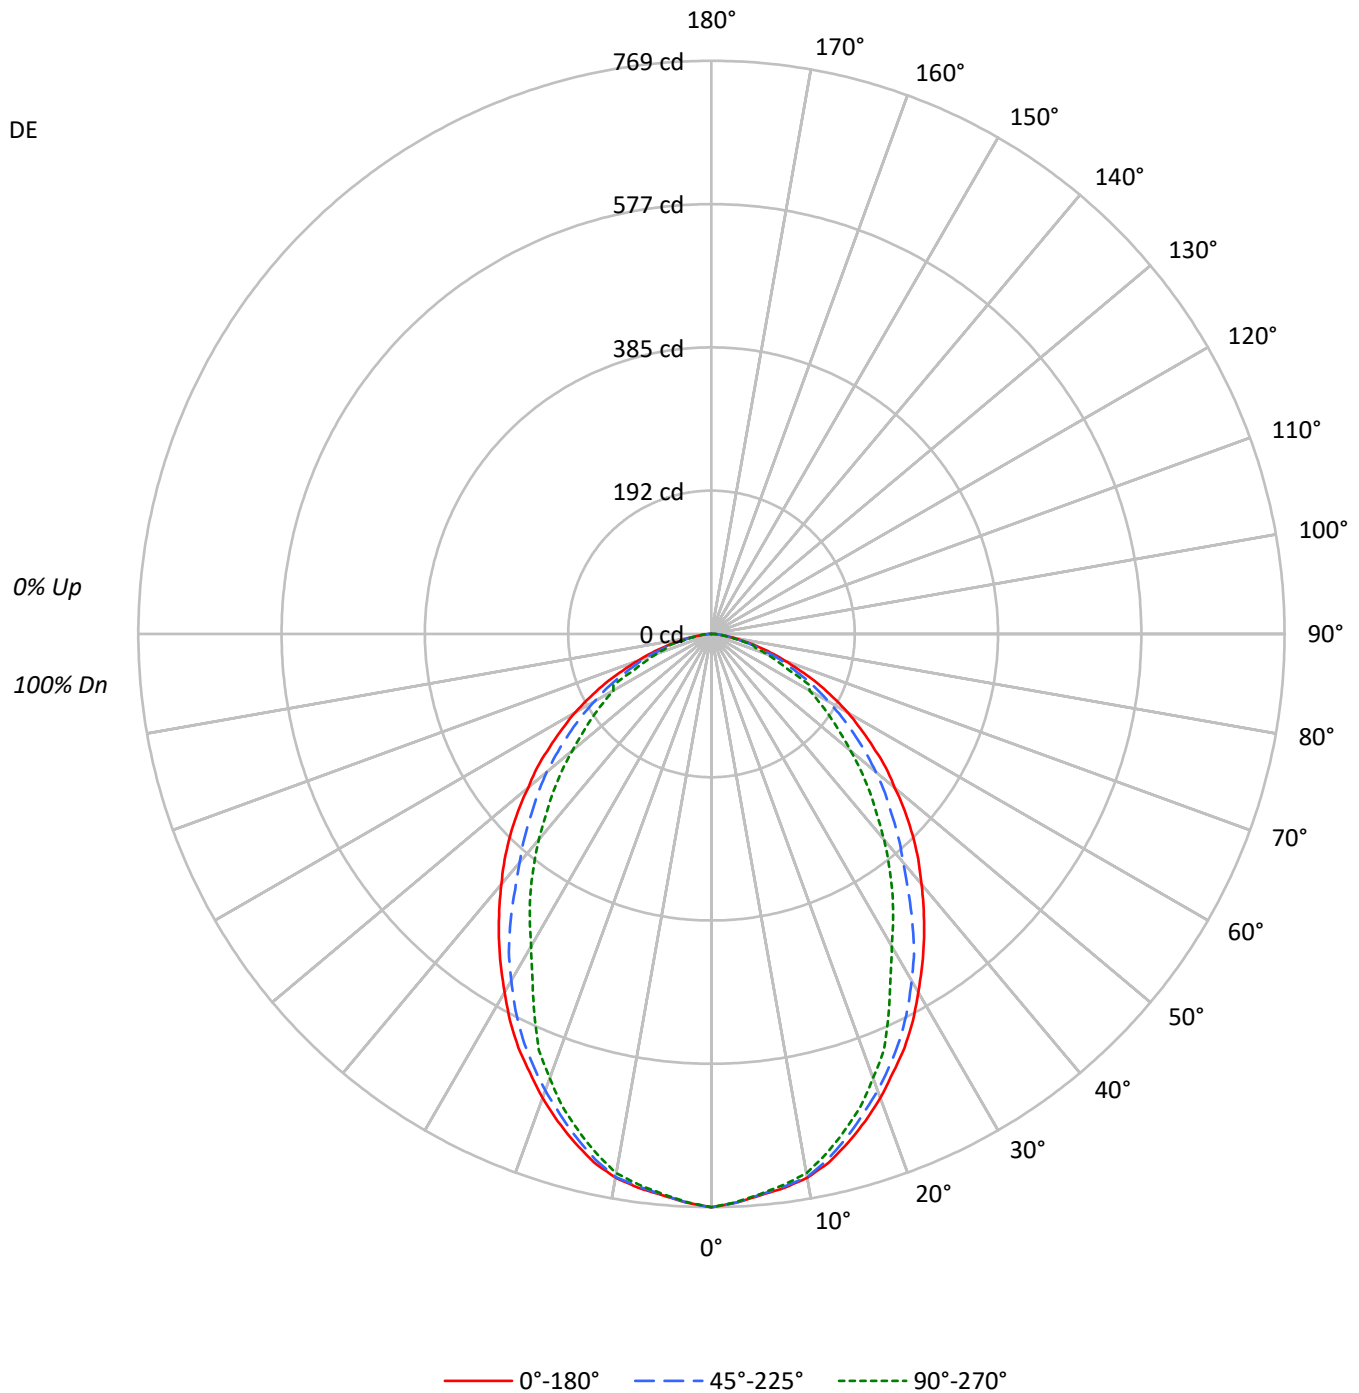



TEST NUMBER: P559489

CATALOG NUMBER: FSR-12-1-LD4-2STD-40-UNV-81-84-EDD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100									100																			
1	110	106	102	99	108	104	100	97	100	97	94	96	94	91	92	90	89	87									87																			
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75									75																			
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65									65																			
4	86	75	67	61	84	74	66	61	72	65	60	69	64	59	67	62	58	56									56																			
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50									50																			
6	74	62	53	48	72	61	53	47	59	52	47	57	51	47	56	50	46	44									44																			
7	69	56	48	43	67	56	48	42	54	47	42	53	46	42	51	46	42	40									40																			
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36									36																			
9	61	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	33									33																			
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	32	30									30																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8280	8280	8280
5°	8166	8157	8148
10°	8096	8086	8028
15°	7877	7798	7689
20°	7589	7466	7262
25°	7277	7118	6675
30°	6897	6676	6012
35°	6532	6169	5562
40°	6160	5622	5060
45°	5807	5198	4576
50°	5375	4824	4079
55°	4973	4373	3654
60°	4555	3905	3274
65°	4009	3421	2898
70°	3301	2993	2464
75°	2624	2292	2404
80°	1767	1655	1543
85°	1099	1321	1531

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5807 cd/sqm



TEST NUMBER: P559489

CATALOG NUMBER: FSR-12-1-LD4-2STD-40-UNV-81-84-EDD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.6	4.7
10°-20°	196.5	13.0
20°-30°	272.0	18.0
30°-40°	290.1	19.2
40°-50°	264.6	17.5
50°-60°	207.3	13.7
60°-70°	135.1	8.9
70°-80°	59.9	4.0
80°-90°	12.9	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	540.1	35.8
0°-40°	830.2	55.0
0°-60°	1302.2	86.2
0°-90°	1510.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1510.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	769	769	769	769	769	
5°	756	755	755	754	754	72
15°	707	707	700	693	690	199
25°	613	609	599	578	562	281
35°	497	494	470	434	423	311
45°	382	374	342	313	301	294
55°	265	257	233	205	195	238
65°	157	148	134	137	114	155
75°	63	59	55	52	58	68
85°	9	10	11	12	12	12
90°	0	0	0	0	0	



TEST NUMBER: P559489

CATALOG NUMBER: FSR-12-1-LD4-2STD-40-UNV-81-84-EDD

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	769.2	769.2	769.2	769.2	769.2
2.5°	763.8	763.8	763.8	762.9	762.9
5°	755.8	754.9	754.9	754.1	754.1
7.5°	749.6	748.7	747.8	746.9	745.2
10°	740.7	740.7	739.8	735.4	734.5
12.5°	726.5	725.6	722.0	715.8	714.0
15°	706.9	706.9	699.8	692.7	690.0
17.5°	685.6	684.7	675.8	668.7	665.1
20°	662.5	660.7	651.8	640.2	634.0
22.5°	636.7	636.7	626.0	610.9	604.7
25°	612.7	609.1	599.3	578.0	562.0
27.5°	585.1	579.8	569.1	538.9	520.2
30°	554.9	552.2	537.1	498.0	483.7
32.5°	526.4	522.0	506.0	465.1	453.5
35°	497.1	493.5	469.5	433.9	423.3
37.5°	467.7	463.3	433.0	404.6	391.3
40°	438.4	433.0	400.1	374.4	360.1
42.5°	410.8	403.7	371.7	344.1	328.1
45°	381.5	373.5	341.5	313.0	300.6
47.5°	352.1	345.0	315.7	286.3	272.1
50°	321.0	314.8	288.1	258.8	243.6
52.5°	295.2	285.4	259.7	230.3	217.9
55°	265.0	257.0	233.0	205.4	194.7
57.5°	237.4	229.4	207.2	181.4	172.5
60°	211.6	200.1	181.4	159.2	152.1
62.5°	183.2	174.3	158.3	139.6	148.5
65°	157.4	148.5	134.3	136.9	113.8
67.5°	128.9	124.5	112.0	99.6	96.0
70°	104.9	99.6	95.1	81.8	78.3
72.5°	83.6	78.3	72.0	64.9	62.2
75°	63.1	58.7	55.1	52.5	57.8
77.5°	43.6	41.8	39.1	36.5	35.6
80°	28.5	27.6	26.7	25.8	24.9
82.5°	16.9	16.9	16.9	16.9	16.9
85°	8.9	9.8	10.7	11.6	12.4
87.5°	5.3	5.3	6.2	7.1	8.0
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)