

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: FAIL-SAFE

Report Number: P560050

Luminaire Tested: FSR-12-2-LD4-1STD-40-UNV-80-85-EDD-90

Issue Date: 7/20/2021

Test Information

Test Method: LM-79-2019
Report Number: P560050
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-135-5)
Test Lab: INNOVATION CENTER
Issue Date: 7/20/2021
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: FAIL-SAFE
Catalog Number: FSR-12-2-LD4-1STD-40-UNV-80-85-EDD-90
Description: 1X2 FSR TROFFER WITH .125 PRISMATIC ACRYLIC FIXTURE SIDE AND .187 CLEAR PC ENVIRON
SIDE LENSES WITH, 90 CRI AND 4000K CCT LEDS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1269.0 lumens
Efficiency: N/A
Efficacy: 76.4 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1 / 1.15
Luminous Opening: Rectangular (W 1' x L: 2' x H: 0')
CIE Type: Direct


Input Watts (W): 16.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P560050

CATALOG NUMBER: FSR-12-2-LD4-1STD-40-UNV-80-85-EDD-90

Luminous Intensity Polar Plot

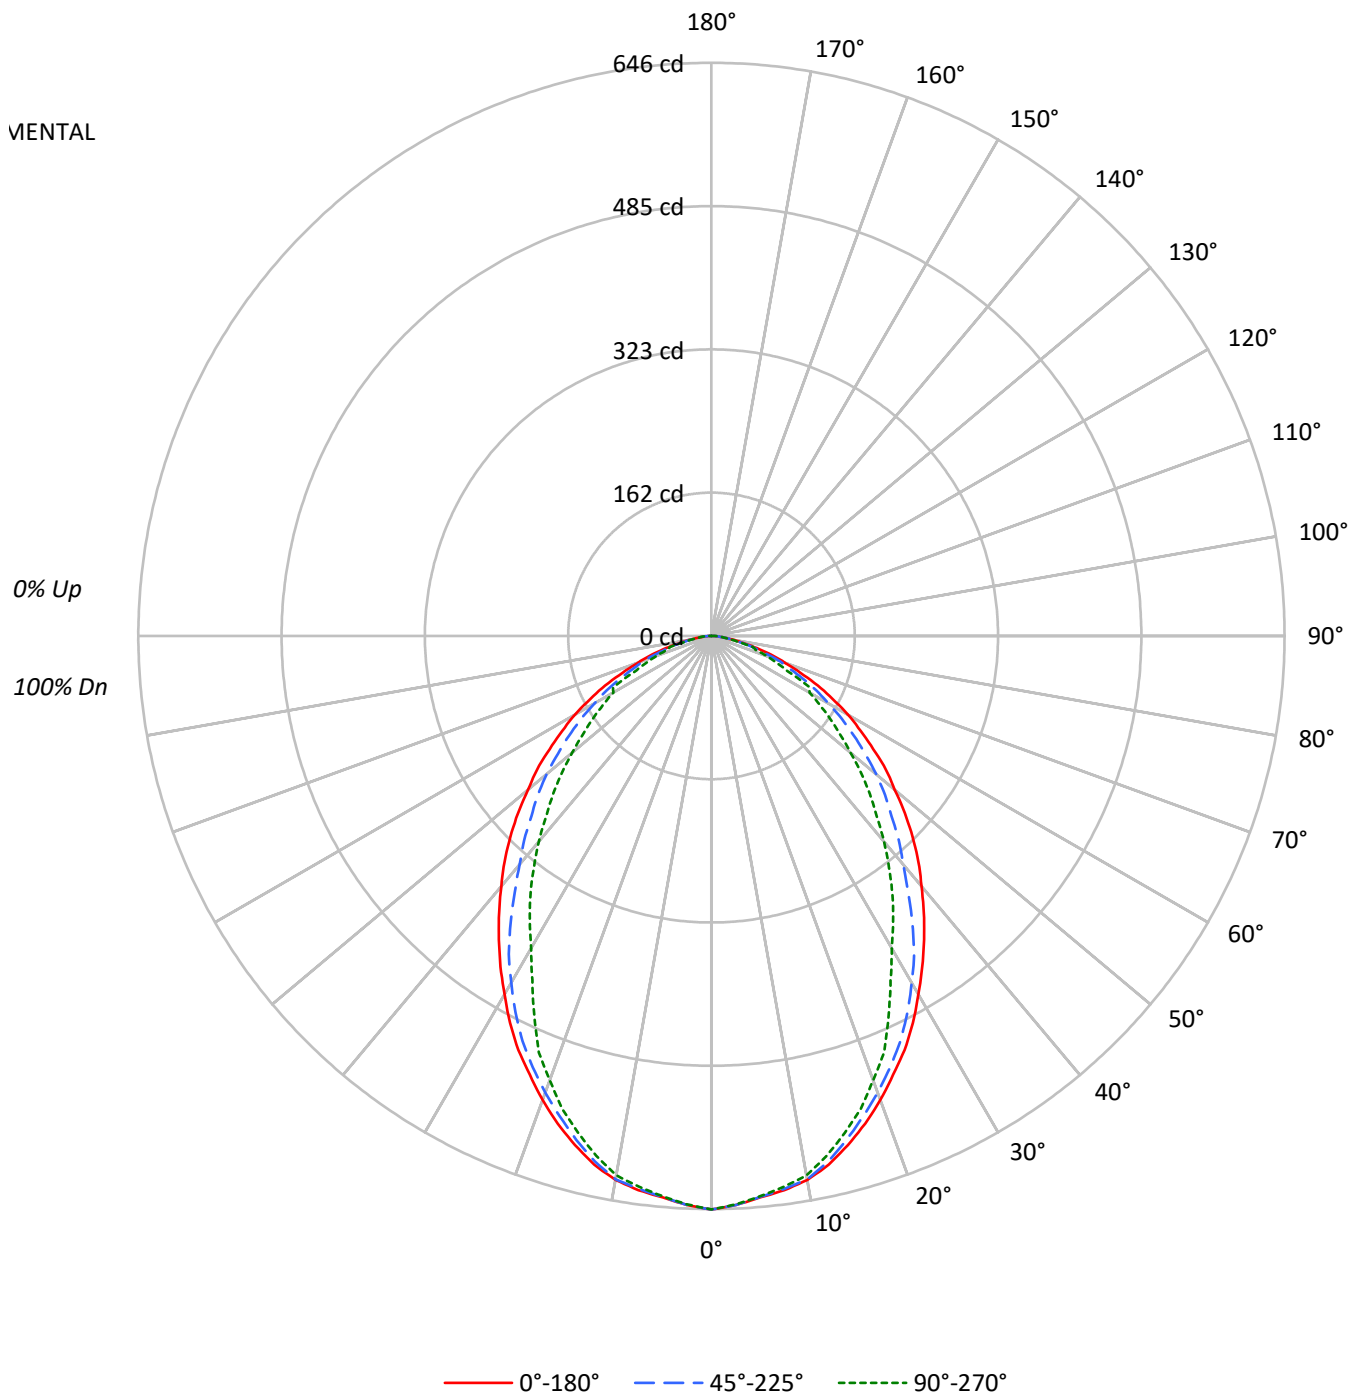



TEST NUMBER: P560050

CATALOG NUMBER: FSR-12-2-LD4-1STD-40-UNV-80-85-EDD-90

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100									100																			
1	110	106	102	99	108	104	100	97	100	97	94	96	94	91	92	90	89	87									87																			
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75									75																			
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65									65																			
4	86	75	67	61	84	74	66	61	72	65	60	69	64	59	67	62	58	56									56																			
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50									50																			
6	74	62	53	48	72	61	53	47	59	52	47	57	51	47	56	50	46	44									44																			
7	69	56	48	43	67	56	48	42	54	47	42	53	46	42	51	46	42	40									40																			
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36									36																			
9	61	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	33									33																			
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	32	30									30																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3479	3479	3479
5°	3432	3428	3424
10°	3402	3398	3374
15°	3310	3277	3231
20°	3188	3137	3052
25°	3058	2991	2805
30°	2898	2805	2526
35°	2744	2593	2337
40°	2588	2363	2127
45°	2440	2184	1923
50°	2259	2027	1715
55°	2090	1837	1536
60°	1915	1640	1376
65°	1685	1436	1219
70°	1388	1259	1035
75°	1104	963	1011
80°	741	694	648
85°	463	556	648

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2440 cd/sqm



TEST NUMBER: P560050

CATALOG NUMBER: FSR-12-2-LD4-1STD-40-UNV-80-85-EDD-90

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.2	4.7
10°-20°	165.1	13.0
20°-30°	228.6	18.0
30°-40°	243.8	19.2
40°-50°	222.4	17.5
50°-60°	174.2	13.7
60°-70°	113.6	8.9
70°-80°	50.3	4.0
80°-90°	10.8	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	453.9	35.8
0°-40°	697.7	55.0
0°-60°	1094.3	86.2
0°-90°	1269.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1269.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	646	646	646	646	646	
5°	635	634	634	634	634	60
15°	594	594	588	582	580	167
25°	515	512	504	486	472	236
35°	418	415	395	365	356	261
45°	321	314	287	263	253	247
55°	223	216	196	173	164	200
65°	132	125	113	115	96	130
75°	53	49	46	44	49	57
85°	8	8	9	10	10	10
90°	0	0	0	0	0	



TEST NUMBER: P560050

CATALOG NUMBER: FSR-12-2-LD4-1STD-40-UNV-80-85-EDD-90

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	646.4	646.4	646.4	646.4	646.4
2.5°	641.9	641.9	641.9	641.2	641.2
5°	635.2	634.5	634.5	633.7	633.7
7.5°	630.0	629.2	628.5	627.7	626.2
10°	622.5	622.5	621.8	618.0	617.3
12.5°	610.5	609.8	606.8	601.6	600.1
15°	594.1	594.1	588.1	582.1	579.9
17.5°	576.2	575.4	567.9	562.0	559.0
20°	556.7	555.2	547.8	538.1	532.8
22.5°	535.1	535.1	526.1	513.4	508.2
25°	514.9	511.9	503.7	485.7	472.3
27.5°	491.7	487.2	478.3	452.9	437.2
30°	466.3	464.1	451.4	418.5	406.5
32.5°	442.4	438.7	425.2	390.8	381.1
35°	417.7	414.7	394.6	364.7	355.7
37.5°	393.1	389.3	363.9	340.0	328.8
40°	368.4	363.9	336.3	314.6	302.7
42.5°	345.3	339.3	312.4	289.2	275.8
45°	320.6	313.9	287.0	263.0	252.6
47.5°	295.9	290.0	265.3	240.6	228.7
50°	269.8	264.5	242.1	217.5	204.8
52.5°	248.1	239.9	218.2	193.5	183.1
55°	222.7	216.0	195.8	172.6	163.7
57.5°	199.5	192.8	174.1	152.4	145.0
60°	177.9	168.1	152.4	133.8	127.8
62.5°	153.9	146.5	133.0	117.3	124.8
65°	132.3	124.8	112.8	115.1	95.7
67.5°	108.4	104.6	94.2	83.7	80.7
70°	88.2	83.7	80.0	68.8	65.8
72.5°	70.2	65.8	60.5	54.6	52.3
75°	53.1	49.3	46.3	44.1	48.6
77.5°	36.6	35.1	32.9	30.6	29.9
80°	23.9	23.2	22.4	21.7	20.9
82.5°	14.2	14.2	14.2	14.2	14.2
85°	7.5	8.2	9.0	9.7	10.5
87.5°	4.5	4.5	5.2	6.0	6.7
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)