

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: FAIL-SAFE

Report Number: P560260

Luminaire Tested: FSR-12-2-LD4-2HI-40-UNV-81-86-EDD-90

Issue Date: 7/20/2021

Test Information

Test Method: LM-79-2019
Report Number: P560260
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-135-5)
Test Lab: INNOVATION CENTER
Issue Date: 7/20/2021
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: FAIL-SAFE
Catalog Number: FSR-12-2-LD4-2HI-40-UNV-81-86-EDD-90
Description: 1X2 FSR TROFFER WITH .156 CLEAR PC FIXTURE SIDE AND .250 CLEAR PC ENVIRONMENTAL SI
LENSES WITH, 90 CRI AND 4000K CCT LEDS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2923.0 lumens
Efficiency: N/A
Efficacy: 67.7 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1 / 1.15
Luminous Opening: Rectangular (W 1' x L: 2' x H: 0')
CIE Type: Direct


Input Watts (W): 43.2
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P560260

CATALOG NUMBER: FSR-12-2-LD4-2HI-40-UNV-81-86-EDD-90

Luminous Intensity Polar Plot

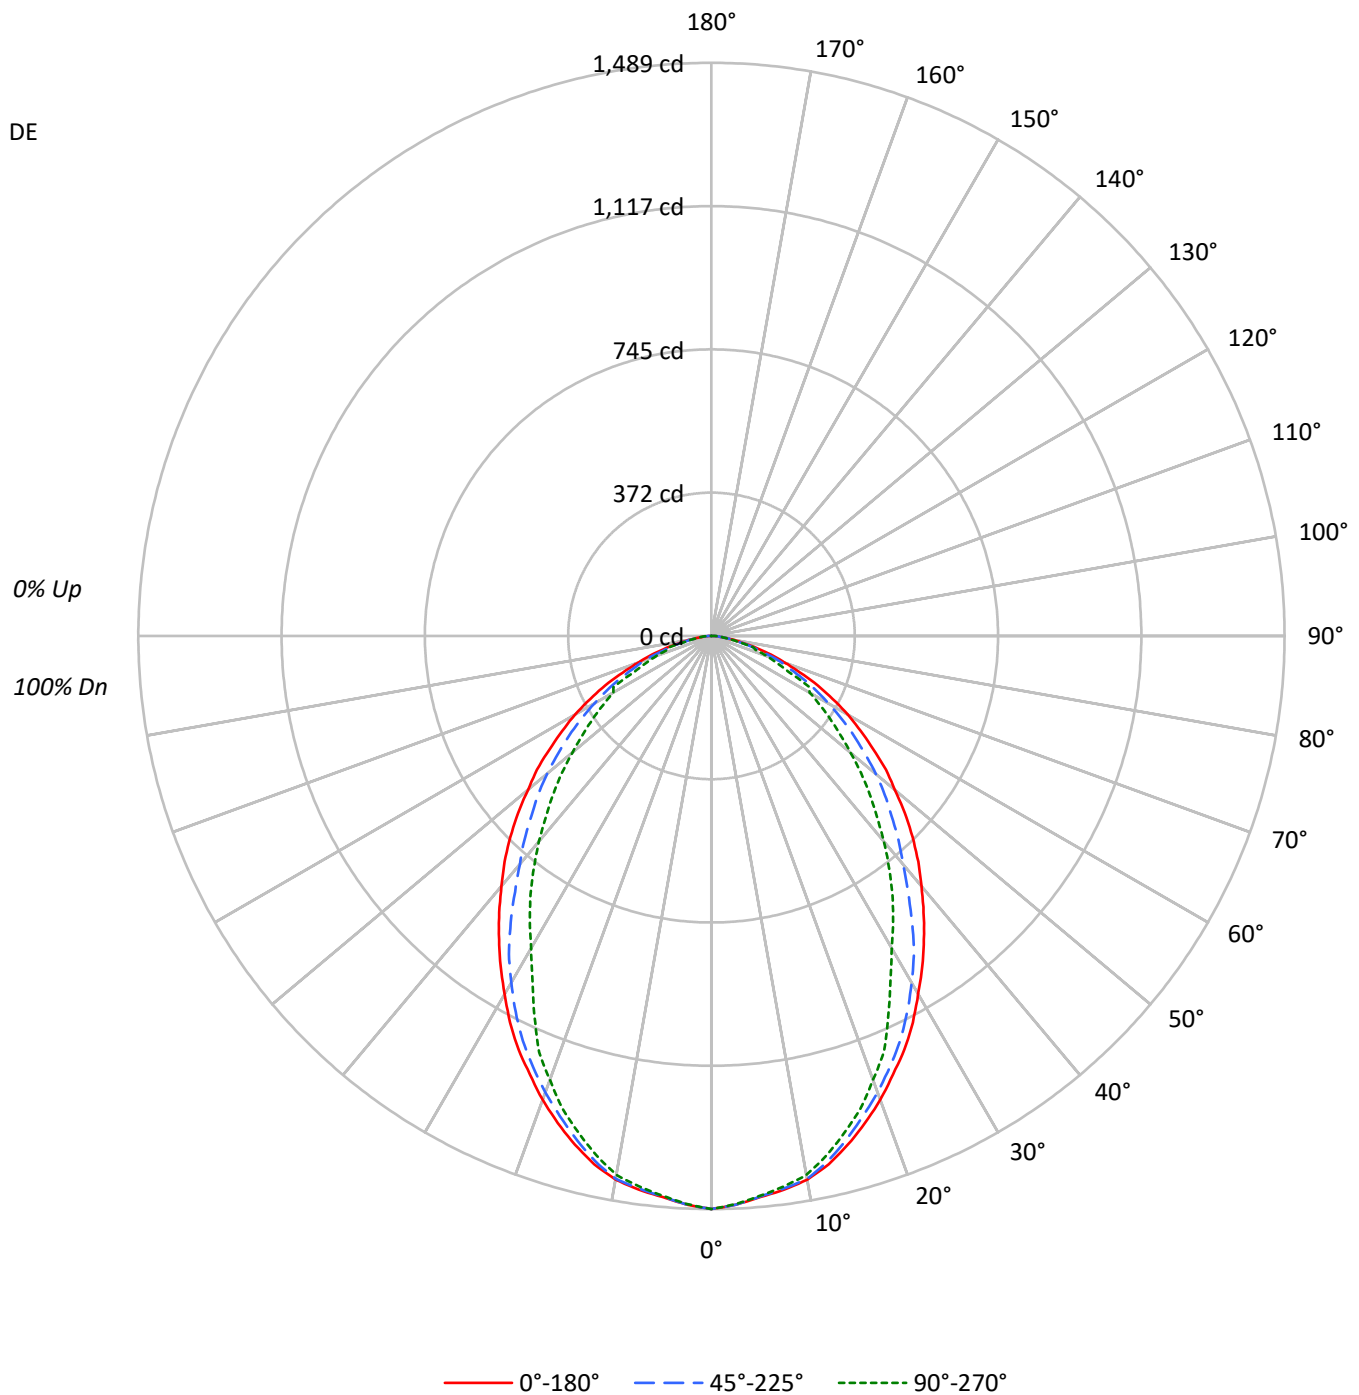



TEST NUMBER: P560260

CATALOG NUMBER: FSR-12-2-LD4-2HI-40-UNV-81-86-EDD-90

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100													100															
1	110	106	102	99	108	104	100	97	100	97	94	96	94	91	92	90	89	87													87															
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75													75															
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65													65															
4	86	75	67	61	84	74	66	61	72	65	60	69	64	59	67	62	58	56													56															
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50													50															
6	74	62	53	48	72	61	53	47	59	52	47	57	51	47	56	50	46	44													44															
7	69	56	48	43	67	56	48	42	54	47	42	53	46	42	51	46	42	40													40															
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36													36															
9	61	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	33													33															
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	32	30													30															

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8013	8013	8013
5°	7904	7895	7886
10°	7836	7826	7770
15°	7624	7548	7442
20°	7345	7226	7029
25°	7043	6890	6460
30°	6675	6461	5819
35°	6322	5972	5383
40°	5962	5442	4898
45°	5620	5031	4428
50°	5203	4670	3949
55°	4814	4232	3537
60°	4410	3779	3168
65°	3880	3310	2805
70°	3196	2899	2384
75°	2541	2219	2327
80°	1708	1599	1494
85°	1062	1278	1488

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5620 cd/sqm



TEST NUMBER: P560260

CATALOG NUMBER: FSR-12-2-LD4-2HI-40-UNV-81-86-EDD-90

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	138.6	4.7
10°-20°	380.4	13.0
20°-30°	526.6	18.0
30°-40°	561.5	19.2
40°-50°	512.3	17.5
50°-60°	401.3	13.7
60°-70°	261.6	8.9
70°-80°	115.9	4.0
80°-90°	24.9	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1045.6	35.8
0°-40°	1607.1	55.0
0°-60°	2520.7	86.2
0°-90°	2923.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2923.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1489	1489	1489	1489	1489	
5°	1463	1461	1461	1460	1460	139
15°	1368	1368	1355	1341	1336	385
25°	1186	1179	1160	1119	1088	544
35°	962	955	909	840	819	602
45°	738	723	661	606	582	569
55°	513	498	451	398	377	460
65°	305	288	260	265	220	300
75°	122	114	107	102	112	131
85°	17	19	21	22	24	24
90°	0	0	0	0	0	



TEST NUMBER: P560260

CATALOG NUMBER: FSR-12-2-LD4-2HI-40-UNV-81-86-EDD-90

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1488.9	1488.9	1488.9	1488.9	1488.9
2.5°	1478.6	1478.6	1478.6	1476.9	1476.9
5°	1463.1	1461.4	1461.4	1459.7	1459.7
7.5°	1451.1	1449.3	1447.6	1445.9	1442.5
10°	1433.9	1433.9	1432.1	1423.5	1421.8
12.5°	1406.3	1404.6	1397.7	1385.7	1382.2
15°	1368.4	1368.4	1354.7	1340.9	1335.7
17.5°	1327.1	1325.4	1308.2	1294.4	1287.5
20°	1282.4	1278.9	1261.7	1239.3	1227.3
22.5°	1232.5	1232.5	1211.8	1182.5	1170.5
25°	1186.0	1179.1	1160.2	1118.9	1087.9
27.5°	1132.6	1122.3	1101.6	1043.1	1007.0
30°	1074.1	1068.9	1039.7	963.9	936.4
32.5°	1019.0	1010.4	979.4	900.2	877.9
35°	962.2	955.3	908.9	840.0	819.3
37.5°	905.4	896.8	838.3	783.2	757.4
40°	848.6	838.3	774.6	724.7	697.1
42.5°	795.2	781.5	719.5	666.1	635.2
45°	738.4	723.0	661.0	605.9	581.8
47.5°	681.6	667.9	611.1	554.3	526.7
50°	621.4	609.3	557.7	500.9	471.6
52.5°	571.5	552.5	502.6	445.8	421.7
55°	513.0	497.5	451.0	397.6	377.0
57.5°	459.6	444.1	401.1	351.1	333.9
60°	409.7	387.3	351.1	308.1	294.3
62.5°	354.6	337.4	306.4	270.2	287.5
65°	304.7	287.5	259.9	265.1	220.3
67.5°	249.6	241.0	216.9	192.8	185.9
70°	203.1	192.8	184.2	158.4	151.5
72.5°	161.8	151.5	139.4	125.7	120.5
75°	122.2	113.6	106.7	101.6	111.9
77.5°	84.3	80.9	75.7	70.6	68.9
80°	55.1	53.4	51.6	49.9	48.2
82.5°	32.7	32.7	32.7	32.7	32.7
85°	17.2	18.9	20.7	22.4	24.1
87.5°	10.3	10.3	12.0	13.8	15.5
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)