

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P277677

Luminaire Tested: **FLD4BX15D010 EU4B1/28040 F4LBXVM1LIBL85**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P277677
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35269)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4BX15D010 EU4B1/28040 F4LBXVM1LIBL85
Description: FAILSAFE 4 INCH RECESSED LED DOWNLIGHT
4 INCH LED VANDAL RESISTANT, MEDIUM (50DEGREE BEAM), SPECULAR CLEAR,
BOTTOM LENS, 0.187 INCH CLEAR POLYCARBONATE
Light Source: (1) 4000K CCT, 80 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1235.1 lumens
Efficiency: N/A
Efficacy: 86.4 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 0.71 / 0.76
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P277677

CATALOG NUMBER: FLD4BX15D010 EU4B1/28040 F4LBXVM1LIBL85

Luminous Intensity Polar Plot

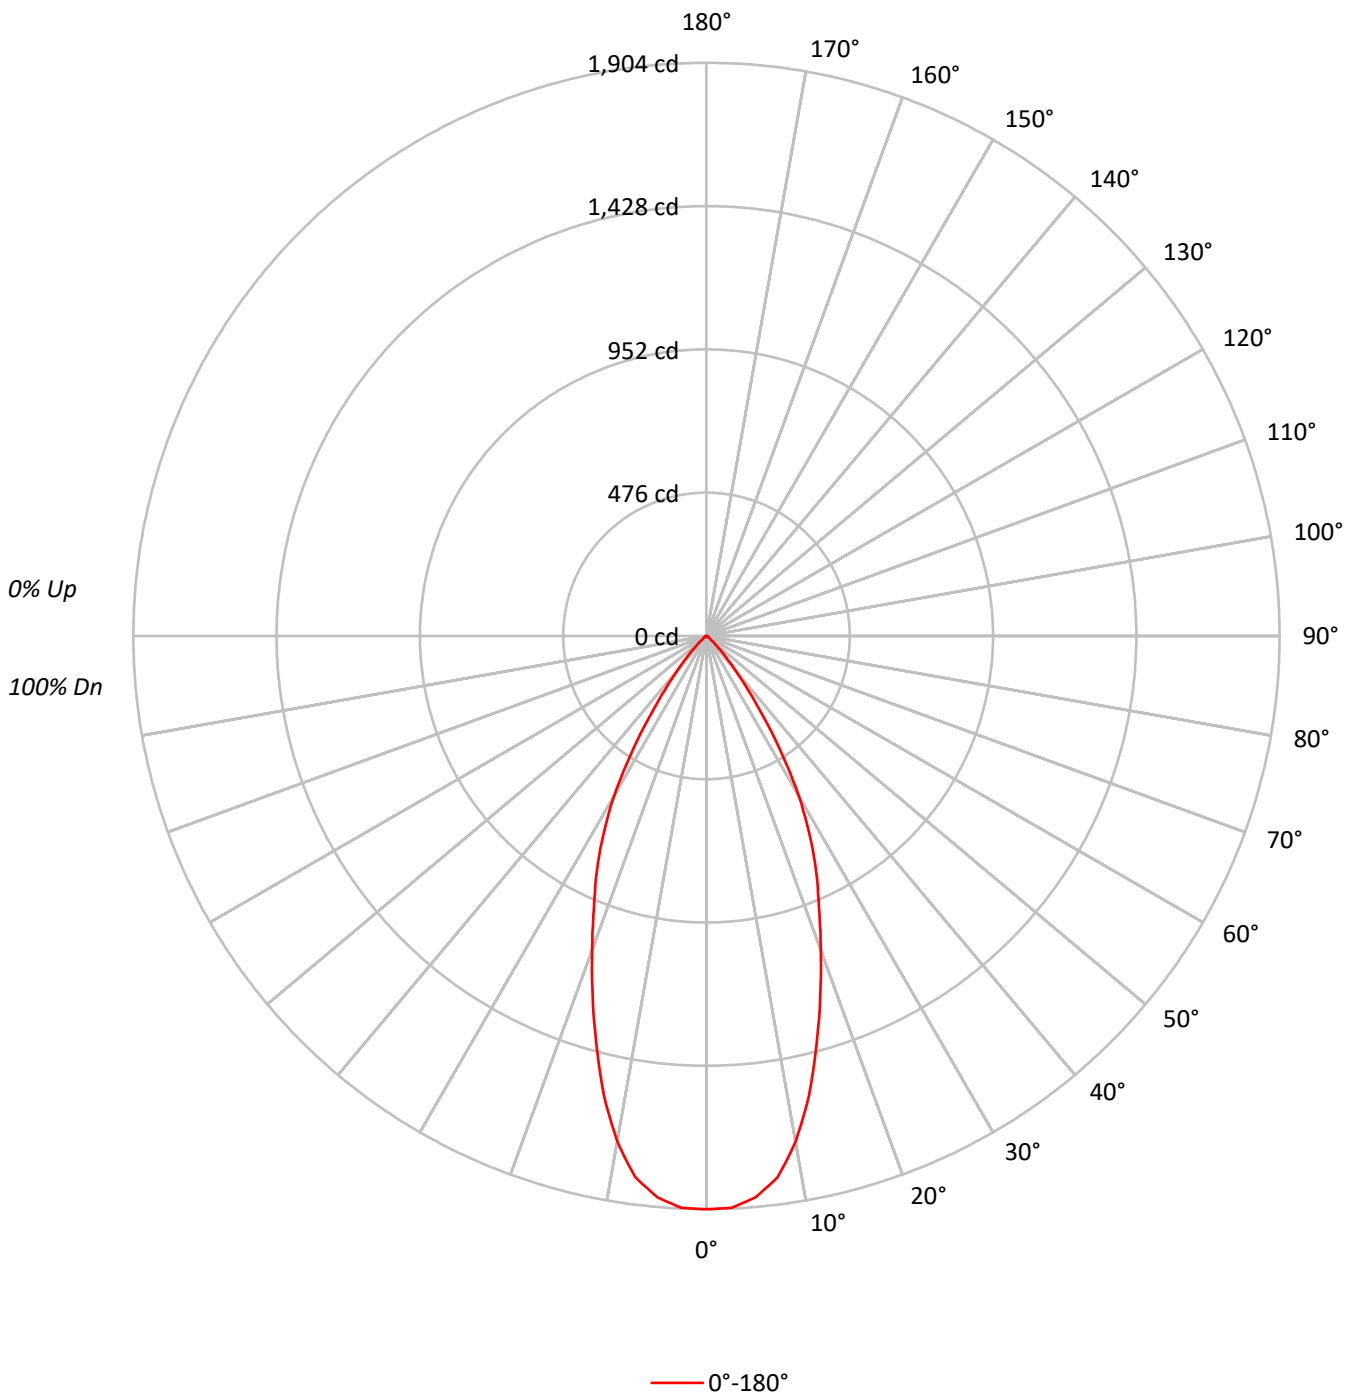



TEST NUMBER: P277677

CATALOG NUMBER: FLD4BX15D010 EU4B1/28040 F4LBXVM1LIBL85

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	92	90	88
3	104	98	93	89	102	96	92	88	94	90	87		91	88	86		89	87	84	83
4	99	92	87	83	97	91	86	82	88	84	81		87	83	80		85	82	79	78
5	94	86	81	77	93	85	80	77	84	79	76		82	78	75		81	77	75	73
6	90	82	76	72	88	81	76	72	79	75	71		78	74	71		77	73	70	69
7	86	77	72	68	85	76	71	67	75	70	67		74	70	67		73	69	66	65
8	82	73	68	64	81	73	67	64	71	67	63		71	66	63		70	66	63	61
9	78	69	64	60	77	69	64	60	68	63	60		67	63	60		66	62	59	58
10	75	66	61	57	74	66	60	57	65	60	57		64	60	57		63	59	56	55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	208054
5°	205285
10°	189208
15°	159515
20°	129086
25°	103992
30°	77439
35°	44817
40°	21551
45°	8977
50°	2958
55°	1333
60°	1027
65°	595
70°	383
75°	507
80°	0
85°	0



TEST NUMBER: P277677

CATALOG NUMBER: FLD4BX15D010 EU4B1/28040 F4LBXVM1LIBL85

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	173.6	14.1
10°-20°	391.1	31.7
20°-30°	391.5	31.7
30°-40°	216.8	17.6
40°-50°	51.2	4.1
50°-60°	7.3	0.6
60°-70°	2.7	0.2
70°-80°	0.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	956.3	77.4
0°-40°	1173.0	95.0
0°-60°	1231.6	99.7
0°-90°	1235.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1235.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1904	
5°	1872	174
15°	1410	391
25°	863	392
35°	336	217
45°	58	51
55°	7	7
65°	2	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P277677

CATALOG NUMBER: FLD4BX15D010 EU4B1/28040 F4LBXVM1LIBL85

CANDELA DISTRIBUTION (FULL):

	0°
0°	1904.2
2.5°	1901.9
5°	1871.7
7.5°	1813.6
10°	1705.4
12.5°	1568.3
15°	1410.2
17.5°	1256.7
20°	1110.2
22.5°	975.4
25°	862.6
27.5°	740.5
30°	613.8
32.5°	470.8
35°	336.0
37.5°	227.9
40°	151.1
42.5°	95.3
45°	58.1
47.5°	33.7
50°	17.4
52.5°	9.3
55°	7.0
57.5°	5.8
60°	4.7
62.5°	3.5
65°	2.3
67.5°	2.3
70°	1.2
72.5°	1.2
75°	1.2
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)