

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572190

Luminaire Tested: **FLD4C-10-D010 FEU4C-X-90-27 F4X-M-X-LI**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P572190
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-10-D010 FEU4C-X-90-27 F4X-M-X-LI
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBMLI TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 910.0 lumens
Efficiency: N/A
Efficacy: 93.3 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.75
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P572190

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-27 F4X-M-X-LI

Luminous Intensity Polar Plot

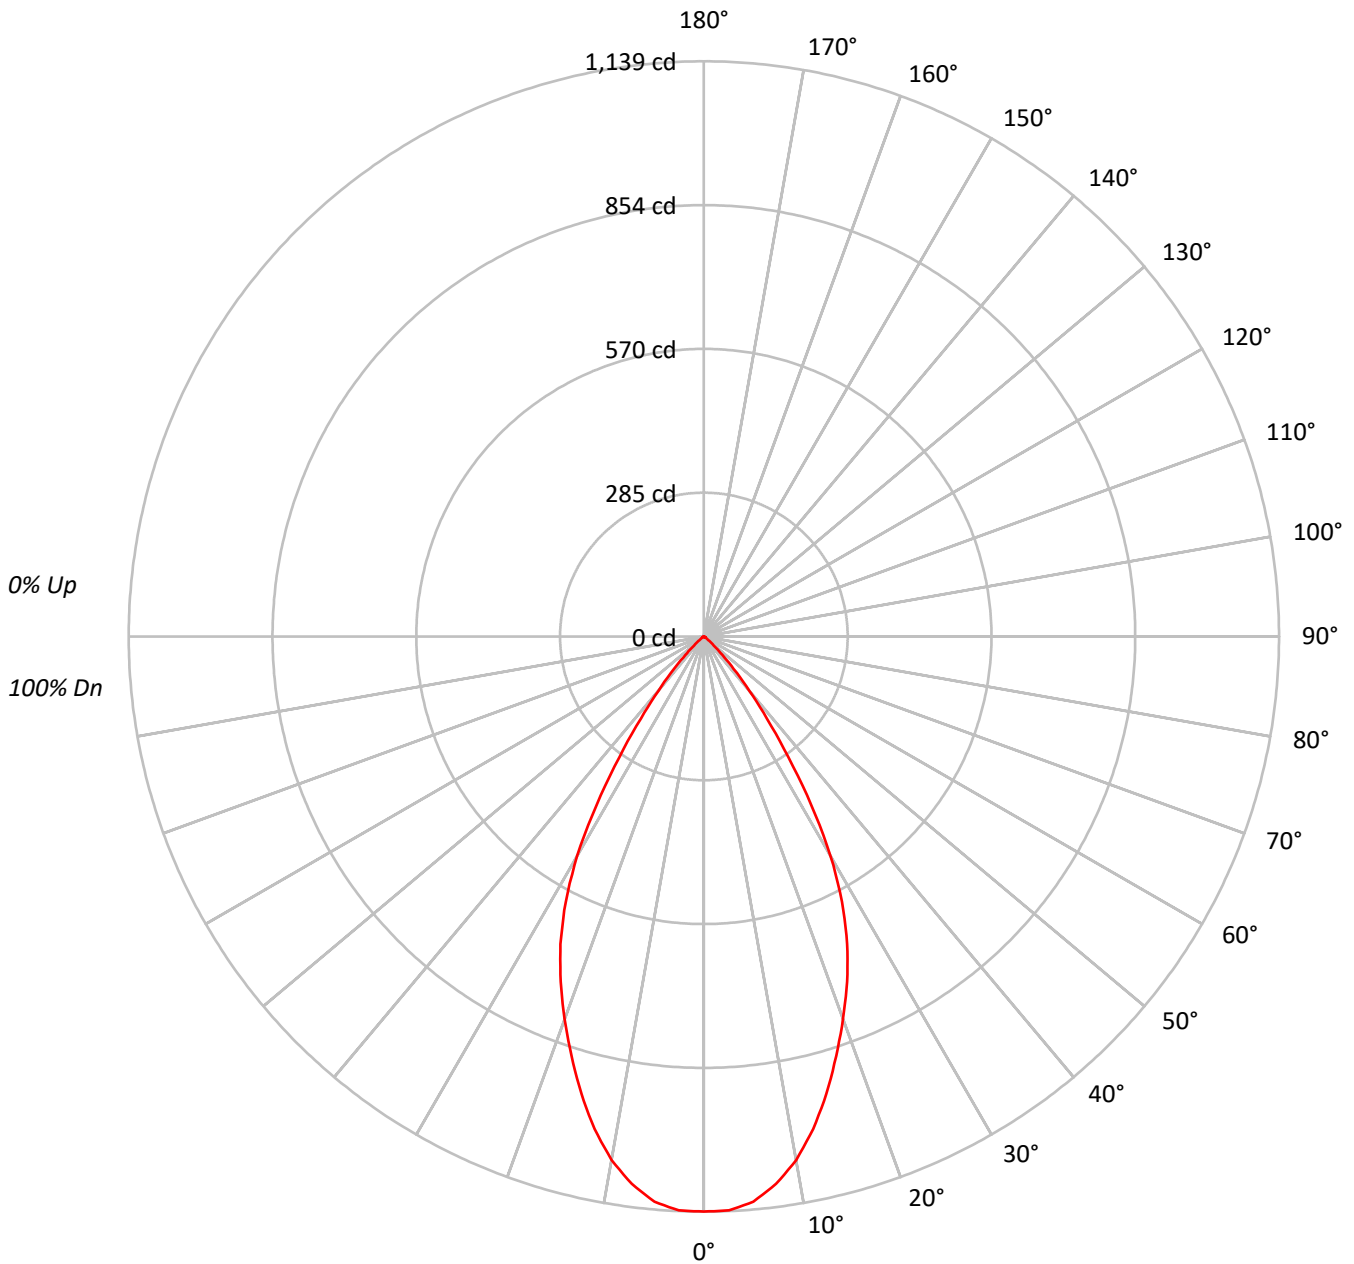



TEST NUMBER: P572190

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-27 F4X-M-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94			
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82			
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76			
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	139906
5°	138578
10°	131310
15°	119225
20°	105349
25°	91079
30°	71199
35°	43658
40°	22404
45°	8896
50°	2886
55°	1007
60°	860
65°	669
70°	431
75°	570
80°	0
85°	0



TEST NUMBER: P572190

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-27 F4X-M-X-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.9	11.5
10°-20°	261.2	28.7
20°-30°	303.6	33.4
30°-40°	185.9	20.4
40°-50°	46.1	5.1
50°-60°	5.4	0.6
60°-70°	2.0	0.2
70°-80°	0.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	669.7	73.6
0°-40°	855.6	94.0
0°-60°	907.2	99.7
0°-90°	910.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	910.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1139	
5°	1124	105
15°	937	261
25°	672	304
35°	291	186
45°	51	46
55°	5	5
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P572190

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-27 F4X-M-X-LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1138.8
2.5°	1137.6
5°	1123.7
7.5°	1093.4
10°	1052.6
12.5°	999.1
15°	937.4
17.5°	871.0
20°	805.8
22.5°	740.6
25°	671.9
27.5°	592.7
30°	501.9
32.5°	395.9
35°	291.1
37.5°	204.9
40°	139.7
42.5°	87.3
45°	51.2
47.5°	29.1
50°	15.1
52.5°	7.0
55°	4.7
57.5°	3.5
60°	3.5
62.5°	2.3
65°	2.3
67.5°	1.2
70°	1.2
72.5°	1.2
75°	1.2
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)