

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572280

Luminaire Tested: **FLD4C-10-D010 FEU4C-X-90-35 F4X-W-X-H**

Issue Date: 3/1/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P572280  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/1/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD4C-10-D010 FEU4C-X-90-35 F4X-W-X-H  
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 4LBWH TRIM

Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 854.0 lumens  
Efficiency: N/A  
Efficacy: 87.6 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.13  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 9.75  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P572280

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-35 F4X-W-X-H

### Luminous Intensity Polar Plot

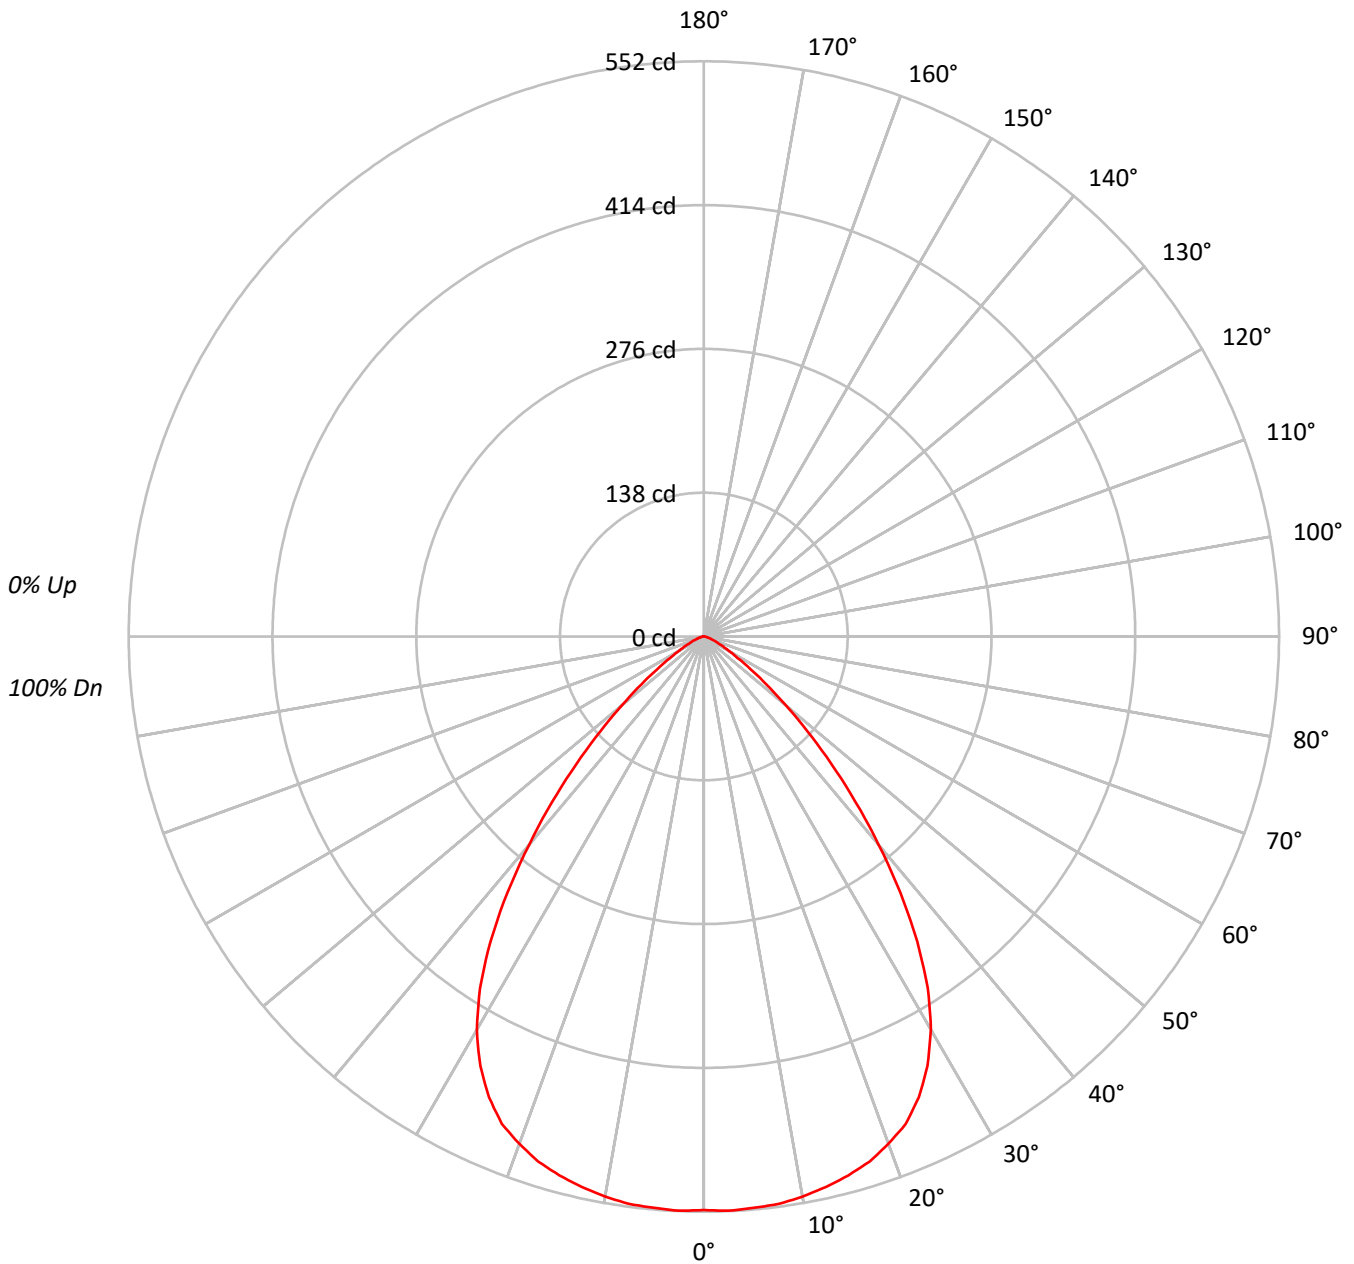



TEST NUMBER: P572280

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-35 F4X-W-X-H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 112 | 109 | 106 | 104 | 110 | 107 | 104 | 102 | 103 | 101 | 99  | 99  | 97  | 96  | 96  | 94  | 93  | 91  |    |    |   |
| 2   | 105 | 100 | 95  | 91  | 103 | 98  | 93  | 90  | 95  | 91  | 88  | 91  | 88  | 86  | 89  | 86  | 84  | 82  |    |    |   |
| 3   | 99  | 91  | 85  | 80  | 97  | 90  | 84  | 80  | 87  | 82  | 78  | 84  | 80  | 77  | 82  | 79  | 76  | 74  |    |    |   |
| 4   | 92  | 83  | 77  | 72  | 90  | 82  | 76  | 71  | 80  | 75  | 70  | 78  | 73  | 70  | 76  | 72  | 69  | 67  |    |    |   |
| 5   | 87  | 77  | 70  | 65  | 85  | 76  | 69  | 64  | 74  | 68  | 64  | 72  | 67  | 63  | 70  | 66  | 62  | 61  |    |    |   |
| 6   | 81  | 71  | 64  | 58  | 80  | 70  | 63  | 58  | 68  | 62  | 58  | 67  | 61  | 57  | 65  | 61  | 57  | 55  |    |    |   |
| 7   | 76  | 65  | 58  | 53  | 75  | 65  | 58  | 53  | 63  | 57  | 53  | 62  | 56  | 52  | 61  | 56  | 52  | 50  |    |    |   |
| 8   | 72  | 60  | 53  | 49  | 70  | 60  | 53  | 49  | 59  | 53  | 48  | 58  | 52  | 48  | 57  | 52  | 48  | 46  |    |    |   |
| 9   | 68  | 56  | 49  | 45  | 66  | 56  | 49  | 45  | 55  | 49  | 44  | 54  | 48  | 44  | 53  | 48  | 44  | 43  |    |    |   |
| 10  | 64  | 52  | 46  | 41  | 63  | 52  | 46  | 41  | 51  | 45  | 41  | 50  | 45  | 41  | 49  | 44  | 41  | 39  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 67631 |
| 5°  | 67889 |
| 10° | 68088 |
| 15° | 68096 |
| 20° | 67722 |
| 25° | 66137 |
| 30° | 61808 |
| 35° | 53527 |
| 40° | 41809 |
| 45° | 30005 |
| 50° | 19495 |
| 55° | 11673 |
| 60° | 6831  |
| 65° | 4390  |
| 70° | 2910  |
| 75° | 2183  |
| 80° | 1627  |
| 85° | 0     |



TEST NUMBER: P572280

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-35 F4X-W-X-H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 52.4   | 6.1       |
| 10°-20°   | 151.0  | 17.7      |
| 20°-30°   | 222.9  | 26.1      |
| 30°-40°   | 219.9  | 25.8      |
| 40°-50°   | 134.6  | 15.8      |
| 50°-60°   | 51.6   | 6.0       |
| 60°-70°   | 16.1   | 1.9       |
| 70°-80°   | 4.7    | 0.6       |
| 80°-90°   | 0.6    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 426.4  | 49.9      |
| 0°-40°    | 646.3  | 75.7      |
| 0°-60°    | 832.5  | 97.5      |
| 0°-90°    | 854.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 854.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 550 |      |
| 5°  | 550 | 52   |
| 15° | 535 | 151  |
| 25° | 488 | 223  |
| 35° | 357 | 220  |
| 45° | 173 | 135  |
| 55° | 54  | 52   |
| 65° | 15  | 16   |
| 75° | 5   | 5    |
| 85° | 0   | 1    |
| 90° | 0   |      |



TEST NUMBER: P572280

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-35 F4X-W-X-H

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 550.5 |
| 2.5°  | 551.6 |
| 5°    | 550.5 |
| 7.5°  | 549.3 |
| 10°   | 545.8 |
| 12.5° | 541.2 |
| 15°   | 535.4 |
| 17.5° | 528.4 |
| 20°   | 518.0 |
| 22.5° | 506.4 |
| 25°   | 487.9 |
| 27.5° | 464.7 |
| 30°   | 435.7 |
| 32.5° | 399.8 |
| 35°   | 356.9 |
| 37.5° | 309.4 |
| 40°   | 260.7 |
| 42.5° | 215.5 |
| 45°   | 172.7 |
| 47.5° | 134.4 |
| 50°   | 102.0 |
| 52.5° | 75.3  |
| 55°   | 54.5  |
| 57.5° | 38.2  |
| 60°   | 27.8  |
| 62.5° | 20.9  |
| 65°   | 15.1  |
| 67.5° | 11.6  |
| 70°   | 8.1   |
| 72.5° | 5.8   |
| 75°   | 4.6   |
| 77.5° | 2.3   |
| 80°   | 2.3   |
| 82.5° | 1.2   |
| 85°   | 0.0   |
| 87.5° | 0.0   |
| 90°   | 0.0   |



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°







(END OF REPORT)