

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P571800

Luminaire Tested: **FLD4C-02-D010 FEU4C-X-90-50 F4X-N-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P571800
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-02-D010 FEU4C-X-90-50 F4X-N-X-H
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 4LBNH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 213.0 lumens
Efficiency: N/A
Efficacy: 60.9 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 3.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P571800

CATALOG NUMBER: FLD4C-02-D010 FEU4C-X-90-50 F4X-N-X-H

Luminous Intensity Polar Plot

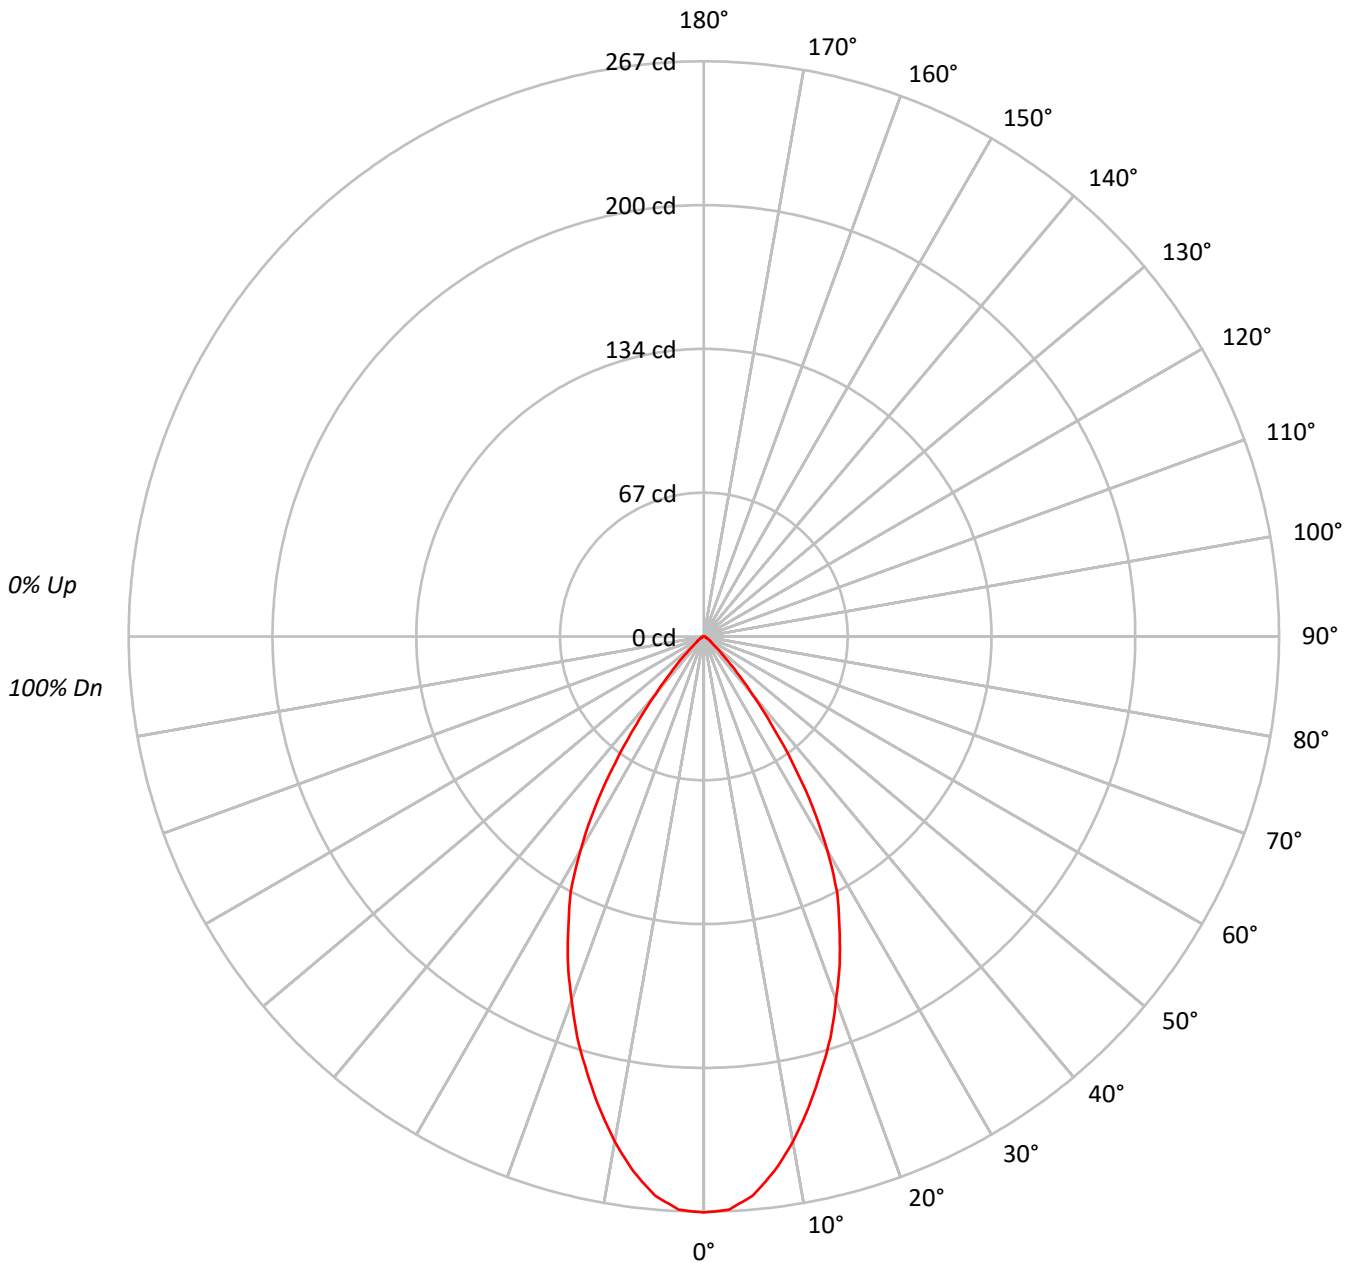



TEST NUMBER: P571800

CATALOG NUMBER: FLD4C-02-D010 FEU4C-X-90-50 F4X-N-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	76	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	32851
5°	32126
10°	29703
15°	26646
20°	23454
25°	20184
30°	16257
35°	10828
40°	5629
45°	2554
50°	1109
55°	750
60°	467
65°	349
70°	287
75°	190
80°	0
85°	0



TEST NUMBER: P571800

CATALOG NUMBER: FLD4C-02-D010 FEU4C-X-90-50 F4X-N-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	24.1	11.3
10°-20°	58.5	27.5
20°-30°	67.9	31.9
30°-40°	45.0	21.1
40°-50°	12.6	5.9
50°-60°	3.2	1.5
60°-70°	1.2	0.6
70°-80°	0.4	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	150.6	70.7
0°-40°	195.6	91.8
0°-60°	211.4	99.2
0°-90°	213.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	213.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	267	
5°	260	24
15°	210	59
25°	149	68
35°	72	45
45°	15	13
55°	4	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P571800

CATALOG NUMBER: FLD4C-02-D010 FEU4C-X-90-50 F4X-N-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	267.4
2.5°	266.3
5°	260.5
7.5°	250.4
10°	238.1
12.5°	224.2
15°	209.5
17.5°	195.3
20°	179.4
22.5°	164.8
25°	148.9
27.5°	133.9
30°	114.6
32.5°	94.2
35°	72.2
37.5°	51.7
40°	35.1
42.5°	22.8
45°	14.7
47.5°	8.9
50°	5.8
52.5°	4.2
55°	3.5
57.5°	2.7
60°	1.9
62.5°	1.5
65°	1.2
67.5°	0.8
70°	0.8
72.5°	0.4
75°	0.4
77.5°	0.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)