

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572622

Luminaire Tested: **FLD4C-20-D010 FEU4C-X-90-35 F4X-M-X-LI**

Issue Date: 3/1/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P572622  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/1/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD4C-20-D010 FEU4C-X-90-35 F4X-M-X-LI  
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 4LBMLI TRIM

Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1894.9 lumens  
Efficiency: N/A  
Efficacy: 86.9 lumens/watt  
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 21.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P572622

CATALOG NUMBER: FLD4C-20-D010 FEU4C-X-90-35 F4X-M-X-LI

### Luminous Intensity Polar Plot

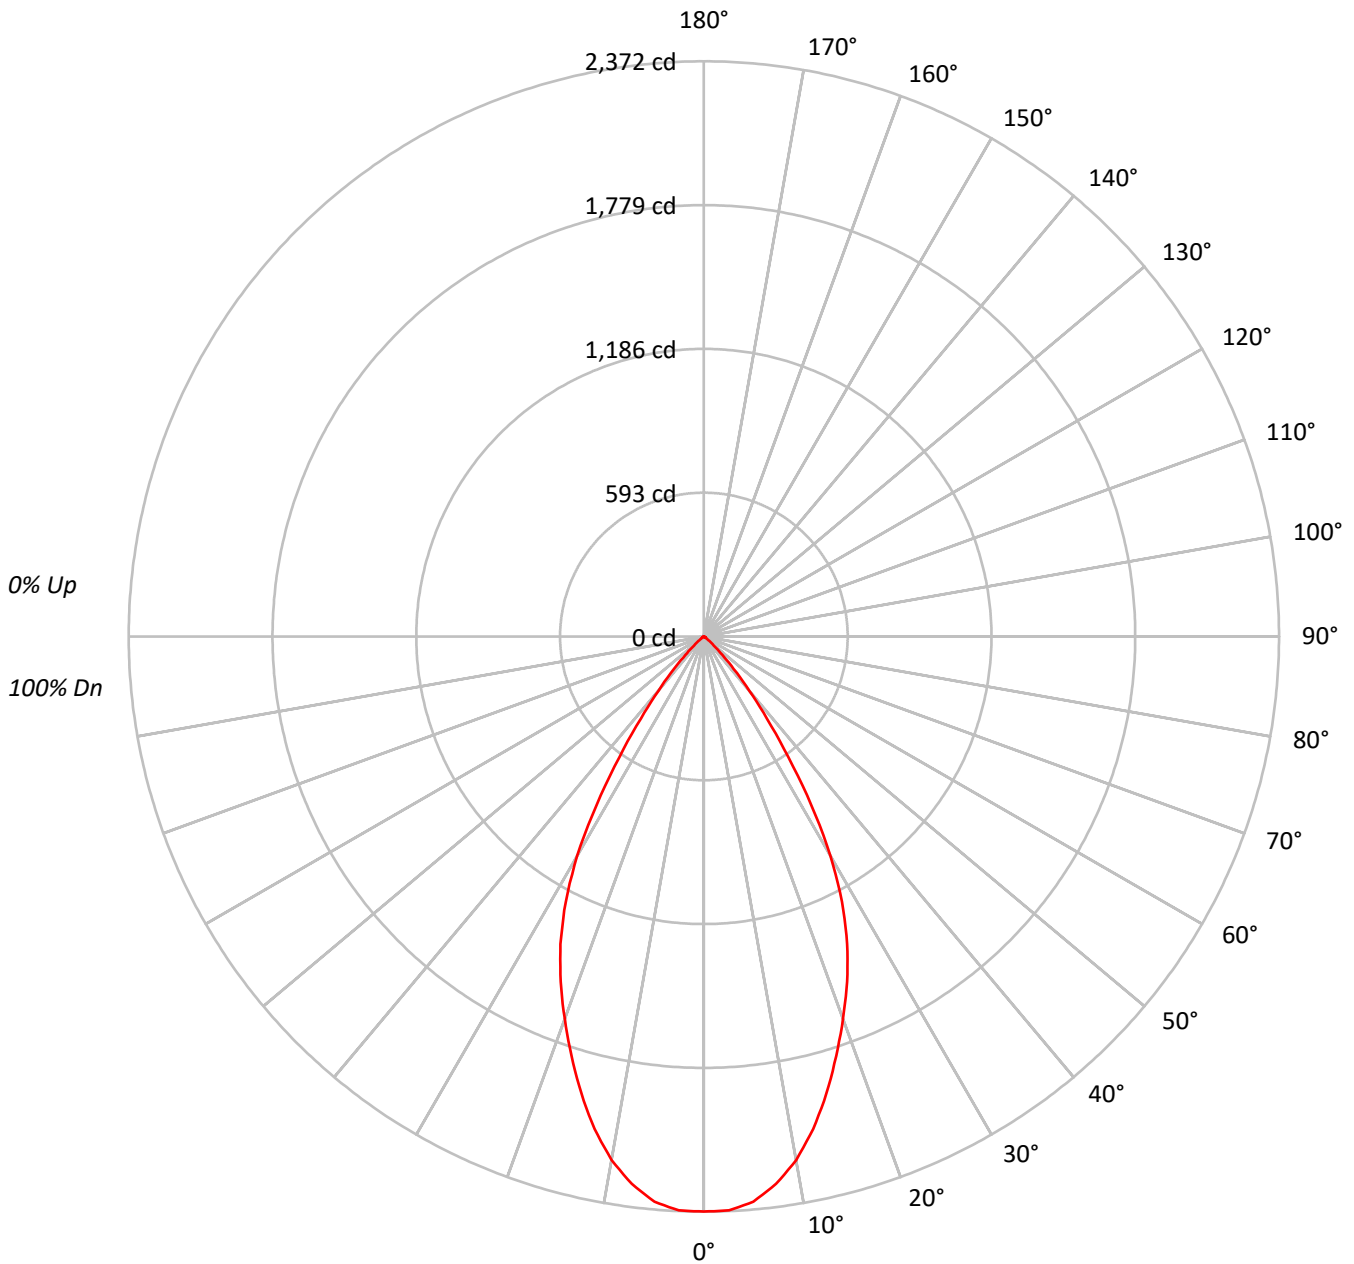



TEST NUMBER: P572622

CATALOG NUMBER: FLD4C-20-D010 FEU4C-X-90-35 F4X-M-X-LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94			
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82			
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76			
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	291347
5°	288575
10°	273449
15°	248270
20°	219378
25°	189667
30°	148257
35°	90916
40°	46669
45°	18538
50°	6020
55°	2078
60°	1769
65°	1424
70°	862
75°	1139
80°	0
85°	0



TEST NUMBER: P572622

CATALOG NUMBER: FLD4C-20-D010 FEU4C-X-90-35 F4X-M-X-LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	218.5	11.5
10°-20°	543.9	28.7
20°-30°	632.3	33.4
30°-40°	387.2	20.4
40°-50°	96.1	5.1
50°-60°	11.2	0.6
60°-70°	4.2	0.2
70°-80°	1.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1394.6	73.6
0°-40°	1781.8	94.0
0°-60°	1889.2	99.7
0°-90°	1894.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1894.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2372	
5°	2340	218
15°	1952	544
25°	1399	632
35°	606	387
45°	107	96
55°	10	11
65°	5	4
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P572622

CATALOG NUMBER: FLD4C-20-D010 FEU4C-X-90-35 F4X-M-X-LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2371.5
2.5°	2369.1
5°	2340.0
7.5°	2276.9
10°	2192.0
12.5°	2080.5
15°	1952.0
17.5°	1813.8
20°	1678.0
22.5°	1542.2
25°	1399.2
27.5°	1234.3
30°	1045.1
32.5°	824.4
35°	606.2
37.5°	426.7
40°	291.0
42.5°	181.8
45°	106.7
47.5°	60.6
50°	31.5
52.5°	14.6
55°	9.7
57.5°	7.2
60°	7.2
62.5°	4.9
65°	4.9
67.5°	2.4
70°	2.4
72.5°	2.4
75°	2.4
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°







(END OF REPORT)