

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572904

Luminaire Tested: **FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H**

Issue Date: 3/1/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P572904  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/1/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H  
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBMH TRIM

Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2125.0 lumens  
Efficiency: N/A  
Efficacy: 67.2 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 31.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P572904

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H

### Luminous Intensity Polar Plot

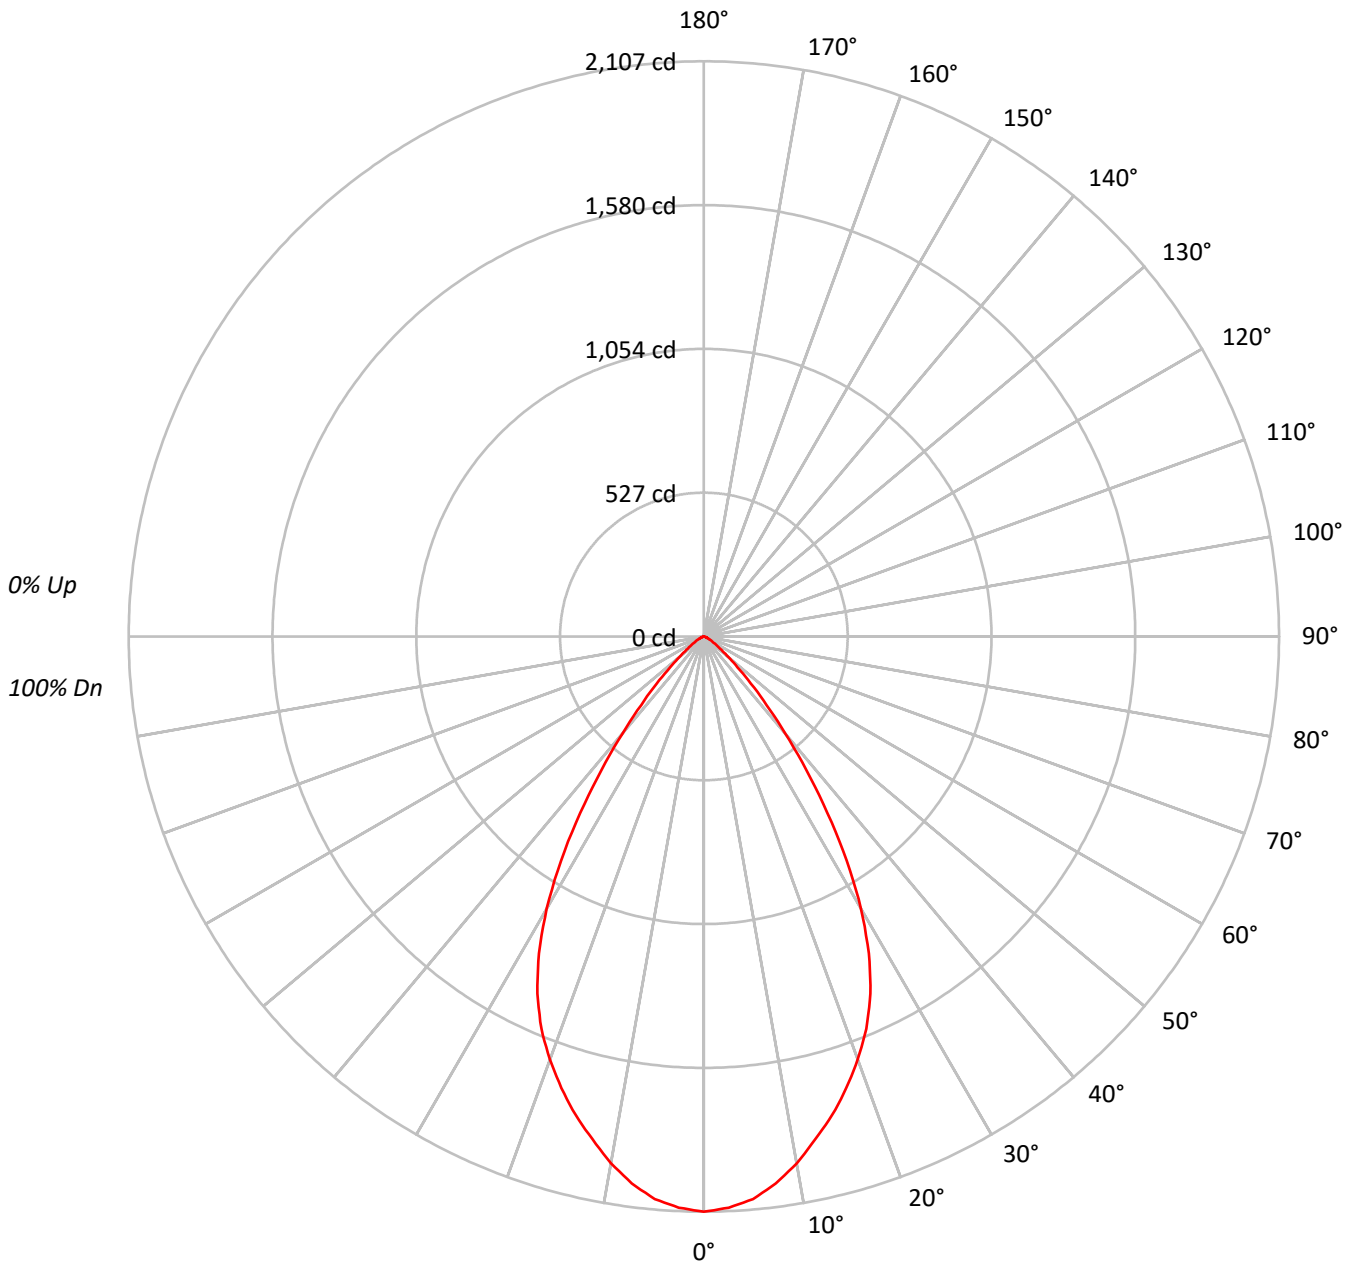



TEST NUMBER: P572904

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79				79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73				73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67				67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62				62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58				58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54				54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50				50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47				47

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	258865
5°	255105
10°	244445
15°	230870
20°	215508
25°	195631
30°	163336
35°	118331
40°	74077
45°	42341
50°	22075
55°	12380
60°	7887
65°	4651
70°	3448
75°	1519
80°	2264
85°	0



TEST NUMBER: P572904

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	193.9	9.1
10°-20°	508.6	23.9
20°-30°	653.7	30.8
30°-40°	491.8	23.1
40°-50°	197.5	9.3
50°-60°	56.2	2.6
60°-70°	17.8	0.8
70°-80°	5.1	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1356.2	63.8
0°-40°	1848.0	87.0
0°-60°	2101.7	98.9
0°-90°	2125.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2125.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2107	
5°	2069	194
15°	1815	509
25°	1443	654
35°	789	492
45°	244	198
55°	58	56
65°	16	18
75°	3	5
85°	0	0
90°	0	



TEST NUMBER: P572904

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2107.1
2.5°	2094.2
5°	2068.6
7.5°	2020.4
10°	1959.5
12.5°	1885.8
15°	1815.2
17.5°	1735.0
20°	1648.4
22.5°	1555.5
25°	1443.2
27.5°	1308.5
30°	1151.4
32.5°	974.9
35°	789.0
37.5°	615.7
40°	461.9
42.5°	339.9
45°	243.7
47.5°	166.8
50°	115.5
52.5°	80.2
55°	57.8
57.5°	41.7
60°	32.1
62.5°	22.5
65°	16.0
67.5°	12.8
70°	9.6
72.5°	6.4
75°	3.2
77.5°	3.2
80°	3.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°







(END OF REPORT)