

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573000

Luminaire Tested: **FLD4C-30-D010 FEU4C-X-90-35 F4X-W-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573000
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-30-D010 FEU4C-X-90-35 F4X-W-X-H
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 4LBWH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2490.1 lumens
Efficiency: N/A
Efficacy: 78.8 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573000

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-35 F4X-W-X-H

Luminous Intensity Polar Plot

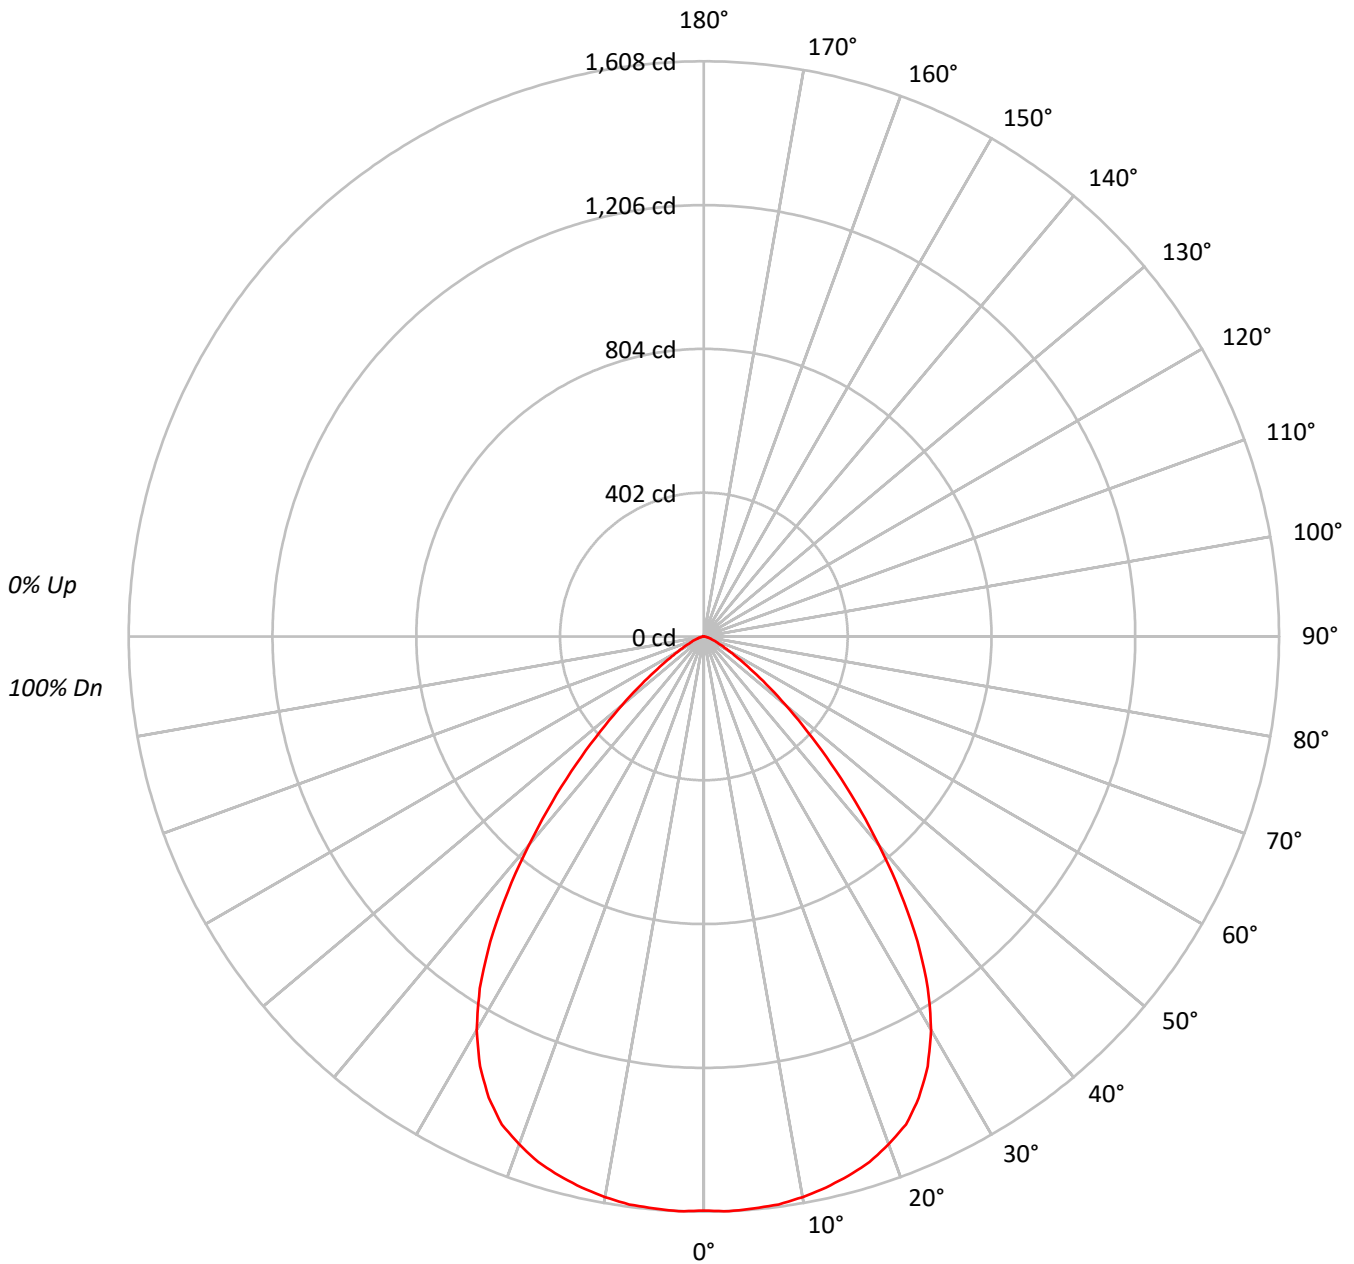



TEST NUMBER: P573000

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-35 F4X-W-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91				91
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82				82
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74				74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67				67
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61				61
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55				55
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50				50
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46				46
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43				43
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39				39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	197180
5°	197933
10°	198525
15°	198539
20°	197454
25°	192825
30°	180218
35°	156065
40°	121916
45°	87479
50°	56822
55°	34013
60°	19902
65°	12791
70°	8513
75°	6408
80°	4811
85°	0



TEST NUMBER: P573000

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-35 F4X-W-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.8	6.1
10°-20°	440.4	17.7
20°-30°	649.9	26.1
30°-40°	641.3	25.8
40°-50°	392.5	15.8
50°-60°	150.5	6.0
60°-70°	47.1	1.9
70°-80°	13.8	0.6
80°-90°	1.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1243.1	49.9
0°-40°	1884.4	75.7
0°-60°	2427.4	97.5
0°-90°	2490.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2490.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1605	
5°	1605	153
15°	1561	440
25°	1422	650
35°	1041	641
45°	504	392
55°	159	150
65°	44	47
75°	14	14
85°	0	2
90°	0	



TEST NUMBER: P573000

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-35 F4X-W-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	1605.0
2.5°	1608.3
5°	1605.0
7.5°	1601.6
10°	1591.4
12.5°	1577.9
15°	1561.0
17.5°	1540.7
20°	1510.3
22.5°	1476.6
25°	1422.5
27.5°	1354.8
30°	1270.4
32.5°	1165.7
35°	1040.6
37.5°	902.1
40°	760.2
42.5°	628.5
45°	503.5
47.5°	391.9
50°	297.3
52.5°	219.7
55°	158.8
57.5°	111.5
60°	81.0
62.5°	60.9
65°	44.0
67.5°	33.8
70°	23.7
72.5°	16.9
75°	13.5
77.5°	6.8
80°	6.8
82.5°	3.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)