

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573132

Luminaire Tested: **FLD4C-35-D010 FEU4C-X-90-30 F4X-N-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573132
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-35-D010 FEU4C-X-90-30 F4X-N-X-H
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 4LBNH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2167.0 lumens
Efficiency: N/A
Efficacy: 53.6 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573132

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-30 F4X-N-X-H

Luminous Intensity Polar Plot

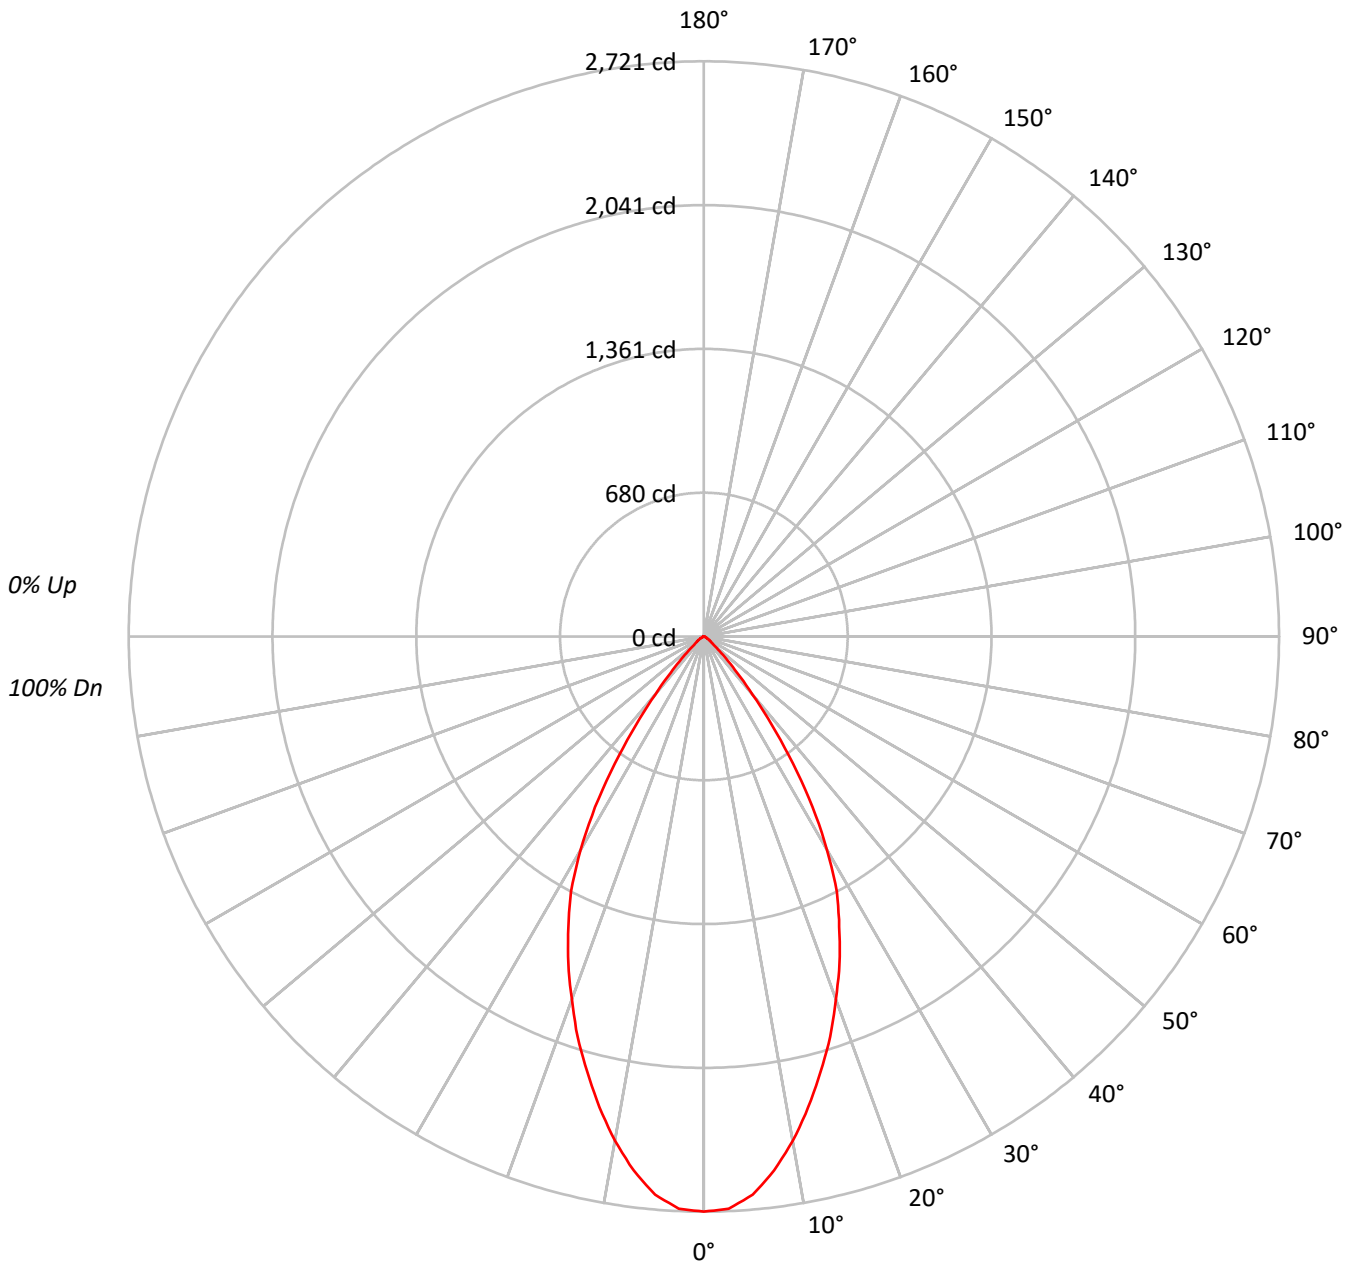



TEST NUMBER: P573132

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-30 F4X-N-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	334260
5°	326818
10°	302179
15°	271138
20°	238688
25°	205418
30°	165408
35°	110113
40°	57286
45°	25922
50°	11257
55°	7561
60°	4840
65°	3430
70°	2838
75°	1851
80°	0
85°	0



TEST NUMBER: P573132

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-30 F4X-N-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	245.5	11.3
10°-20°	595.4	27.5
20°-30°	691.3	31.9
30°-40°	457.8	21.1
40°-50°	128.4	5.9
50°-60°	32.3	1.5
60°-70°	12.1	0.6
70°-80°	4.1	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1532.2	70.7
0°-40°	1990.0	91.8
0°-60°	2150.7	99.3
0°-90°	2167.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2167.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2721	
5°	2650	245
15°	2132	595
25°	1515	691
35°	734	458
45°	149	128
55°	35	32
65°	12	12
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P573132

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-30 F4X-N-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	2720.8
2.5°	2709.0
5°	2650.1
7.5°	2547.9
10°	2422.3
12.5°	2280.9
15°	2131.8
17.5°	1986.5
20°	1825.7
22.5°	1676.4
25°	1515.4
27.5°	1362.3
30°	1166.0
32.5°	957.9
35°	734.2
37.5°	526.1
40°	357.2
42.5°	231.6
45°	149.2
47.5°	90.4
50°	58.9
52.5°	43.1
55°	35.3
57.5°	27.6
60°	19.7
62.5°	15.7
65°	11.8
67.5°	7.9
70°	7.9
72.5°	3.9
75°	3.9
77.5°	3.9
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)